

Description

The AZBD10A4IC interface card and PWM servo drive assembly is designed to drive brushless and brushed DC motors at a high switching frequency. The interface card features quick-disconnect connectors. The AZBD10A4IC is fully protected against over-voltage, under-voltage, over-current, over-heating, and shortcircuits. A single digital output indicates operating status. The drive interfaces with digital controllers that have analog ±10V output. The AZBD10A4IC can utilize Hall Sensor feedback and operates in Duty Cycle (Open Loop) Mode. This servo drive requires only a single unregulated isolated DC power supply, and is fully RoHS II (Reduction of Hazardous Substances) compliant. Easily accessible test points are available for I/O and Feedback monitoring.

See Part Numbering Information on last page of datasheet for additional ordering options. The AZ Series Hardware Installation Manual is available for download at www.a-m-c.com.

Power Range	
Peak Current	10 A
Continuous Current	5 A
Supply Voltage	10 - 36 VDC



Features

- Detachable Connectors
- Four Quadrant Regenerative Operation
- Direct Board-to-Board Integration
- Lightweight

HARDWARE PROTECTION

.

.

Over-Voltage

Under-Voltage

Over-Current

Over-Temperature

Short-circuit (phase-phase)

Short-circuit (phase-ground)

- High Switching Frequency
- Wide Temperature Range
- Differential Input Command
- Digital Fault Output Monitor

MODE OF OPERATION

Duty Cycle (Open Loop)

Compact Size

High Power Density

12VDC Operation

- COMMUTATION
- Trapezoidal
- MOTORS SUPPORTED
 - Three Phase (Brushless)

Velocity Monitor Output

Single Supply Operation

Current Monitor Output

Duty Cycle (Open Loop) Mode

Single Phase (Brushed, Voice Coil, Inductive Load)

COMMAND SOURCE

±10 V Analog

COMPLIANCES & AGENCY APPROVALS

- RoHS II
- UL/cUL Pending
- CE Pending

Sold & Serviced By:

Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com

Digital Fault Output Digital Inhibit Input

- Analog Velocity Monitor
- Analog Current Monitor
- Analog Command Input


FEEDBACK SUPPORTED

INPUTS/OUTPUTS

Hall Sensors



BLOCK DIAGRAM

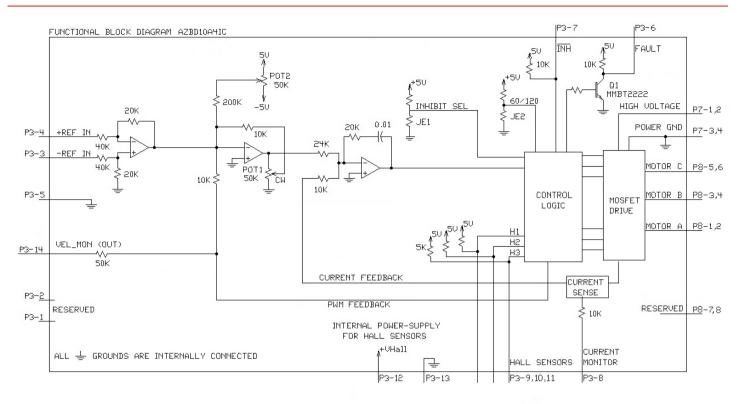

Information on Approvals and Compliances



The RoHS II Directive 2011/65/EU restricts the use of certain substances including lead, mercury, cadmium, hexavalent chromium and halogenated flame retardants PBB and PBDE in electronic equipment.





SPECIFICATIONS

	Power S	pecifications	
Description	Units	Value	
DC Supply Voltage Range	VDC	10 - 36	
DC Bus Under Voltage Limit	VDC	8	
DC Bus Over Voltage Limit	VDC	40	
Maximum Peak Output Current ¹	A	10	
Maximum Continuous Output Current	A	5	
Maximum Continuous Output Power	W	171	
Maximum Power Dissipation at Continuous Current W 9		9	
Minimum Load Inductance (Line-To-Line) ²		100	
Internal Bus Capacitance ³		23.5	
Low Voltage Supply Outputs +5 VDC (30 mA)		+5 VDC (30 mA)	
Maximum Output PWM Duty Cycle	%	92 (±3%)	
Switching Frequency	kHz	40	
Control Specifications			
Description	Units	Value	
Command Sources	-	±10 V Analog	
Feedback Supported	-	Halls	
Commutation Methods	Commutation Methods - Trapezoidal		
Madaa af Osantian		Duty Quela (On an Lana)	

Mechanical Specifications			
	Hardware Protection	-	Invalid Commutation Feedback, Over Current, Over Temperature, Over Voltage, Under Voltage, Short Circuit (Phase-Phase & Phase-Ground)
	Motors Supported	-	Three Phase (Brushless), Single Phase (Brushed, Voice Coil, Inductive Load)
	Modes of Operation	-	Duty Cycle (Open Loop)

Mechanical Specifications			
Description	Units	Value	
Agency Approvals	-	RoHS II, UL/cUL Pending, CE Pending	
Size (H x W x D)	mm (in)	43.2 x 38.1 x 18.5 (1.70 x 1.50 x 0.73)	
Weight	g (oz)	17 (0.6)	
Operating Temperature Range ⁴	°C (°F)	0 - 85 (32 - 185)	
Storage Temperature Range	°C (°F)	-40 - 85 (-40 - 185)	
Relative Humidity	-	0 - 90% Non-Condensing	
Form Factor	-	PCB Mounted	
P3 Connector	-	14-port, 2.0 mm spaced header, vertical mount	
P7 Connector	-	4-port, 2.0 mm spaced header, vertical mount	
P8 Connector	-	8-port, 2.0 mm spaced header, vertical mount	

Notes

1. Maximum duration of peak current is ~2 seconds. Peak RMS value must not exceed continuous current rating of the drive.

2. Lower inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements.

3. Requires a minimum of 47 μ F external bus capacitance between the DC Supply and Power Ground.

4. Additional cooling and/or heatsink may be required to achieve rated performance.





PIN FUNCTIONS

P3 - Signal Connector				
Pin	Name	Description / Notes	1/0	
1	RESERVED	Reserved	-	
2	RESERVED	Reserved	-	
3	-REF IN	Differential Reference Input (±10 V Operating Range, ±15 V Maximum Input)	I	
4	+REF IN	Differential Reference Input (±10 V Operating Range, ±15 V Maximum Input)	I	
5	SIGNAL GND	Signal Ground (Common With Power Ground).	GND	
6	FAULT OUT	TTL level (+5 V) output becomes high when power devices are disabled due to at least one of the following conditions: inhibit, invalid Hall state, output short circuit, over voltage, over temperature, power-up reset.	ο	
7	INHIBIT IN	TTL level (+5 V) inhibit/enable input. Leave open to enable drive. Pull to ground to inhibit drive. Inhibit turns off all power devices.	I	
8	CURRENT MONITOR	Current Monitor. Analog output signal proportional to the actual current output. Scaling is 2 A/V. Measure relative to signal ground.	0	
9	HALL 3		I	
10	HALL 2*	Single-ended Hall/Commutation Sensor Inputs (+5 V logic level)	I	
11	HALL 1		I	
12	+V HALL OUT	Low Power Supply For Hall Sensors (+5 V @ 30 mA). Referenced to signal ground. Short circuit protected.	0	
13	SIGNAL GND	Signal Ground (Common With Power Ground).	GND	
14	VEL MONITOR OUT	Velocity Monitor (± 2.5 V range). Analog output proportional to motor speed. Scaling is $1V = 37\%$ duty cycle.	O/I	

P7 - Power Connector				
Pin	Name	Description / Notes	1/0	
1	PWR GND	Power Ground (Common With Signal Ground). 3A Continuous Current Rating Per Pin	GND	
2	PWR GND	Power Ground (Common with Signal Ground). 3A Continuous Current Rating Per Pin		
3	HV IN	DC Power Input. 3A Continuous Current Rating Per Pin. Requires a minimum of 47 μ F	I	
4	HV IN	external capacitance between HV IN and PWR GND pins.		

P8 – Motor Power Connector				
Pin	Name	Description / Notes	1/0	
1	MOTOR A		0	
2	MOTOR A		0	
3	MOTOR B	Motor Phase Outputs*. Current output distributed equally across 2 pins per motor phase, 3A	0	
4	MOTOR B	continuous current carrying capacity per pin.	0	
5	MOTOR C		0	
6	MOTOR C		0	
7	RESERVED	Described		
8	RESERVED	Reserved	-	

*For use with Single Phase (Brushed) motors, set Switch 1 to ON (see Hardware Settings below) and only connect motor leads to Motor A and Motor B.





HARDWARE SETTINGS

DIP Switch Settings

When set to the ON position, DIP Switch SW1 internally shorts Hall 2 to ground for use with single phase (brushed) motors. Note that in this configuration, all Hall signal pins should be left open, and only motor phase outputs A and B should be used. Default switch setting is OFF (three phase / brushless motors).

DIP Switches SW2, SW3, SW4 are reserved.

Jumper Settings

Jumpers are SMT, 0 ohm resistors located on the underside of the drive PCB. By default, the drive is configured with the jumpers installed. Typical drive operation will not require the jumpers to be removed. Please contact the factory before jumper removal.

Jumper	Description	Configuration	
	SMT Jumper (0Ω Resistor)	Not Installed	Installed (default)
JE1	Inhibit logic. Sets the logic level of inhibit pins. Labeled JE1 on the PCB of the drive.	Low Enable	Low Inhibit
JE2	Hall sensor phasing. Selects 120 or 60 degree commutation phasing. Labeled JE2 on the PCB of the drive.	60 degree	120 degree

Potentiometer Functions

Potentiometers are approximately linear and have 12 active turns with 1 inactive turn on each end.

Potentiometer	Description	Turning CW
1	Loop gain adjustment for duty cycle mode. Turn this pot fully CCW in current mode. Located closest to the corner of the PCB.	Increases gain
2	Offset. Used to adjust any imbalance in the input signal or in the amplifier. Located furthest from the corner of the PCB.	Adjusts offset in negative direction





MECHANICAL INFORMATION

P3 – I/O Connector		
Connector Information	1	14-port, 2.0 mm spaced header, vertical mount
Mating Connector	Details	Molex: P/N 51110-1451 (housing) ; 50394-8051 (crimp pins)
Mating Connector	Included with Drive	Yes
		HALL 3 9 7 INHIBIT IN HALL 1 11 5 SIGNAL GND SIGNAL GND 13


P7 – Power Connector		
Connector Information 4-port, 2.0 mm spaced header, vertical mount		
Mating Connector	Details	Molex: P/N 51110-0460 (housing) ; 50394-8051 (crimp pins)
Mating Connector	Included with Drive	Yes
HV IN 3 1 PWR GND		

P8 – Motor Power Connector				
Connector Information 8-port, 2.0 mm spaced header, vertical mount		8-port, 2.0 mm spaced header, vertical mount		
Mating Connector	Details	Molex: P/N 51110-0860 (housing) ; 50394-8051 (crimp pins)		
Mating Connector	Included with Drive	Yes		
	MOTOR C 5 3 MOTOR B NC (KEY) 7 4 1 MOTOR A RESERVED 8 2 MOTOR A MOTOR C 6 4 MOTOR B			






MOUNTING DIMENSIONS

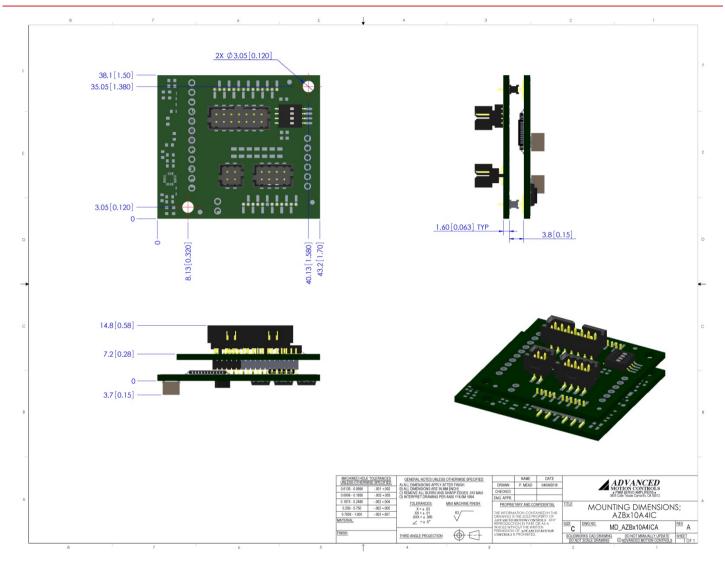





PART NUMBERING INFORMATION

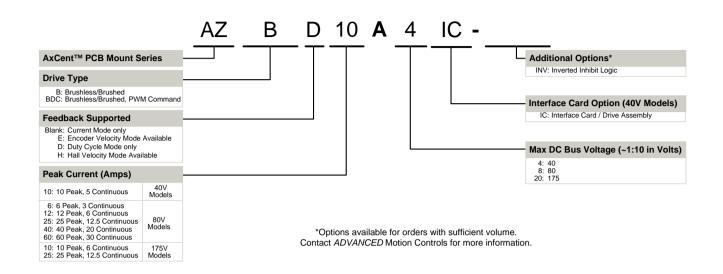

ADVANCED Motion Controls servo drives are available in many configurations. Note that not all possible part number combinations are offered as standard drives. All models listed in the selection tables of the website are readily available, standard product offerings.


ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, *ADVANCED* Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability.

Integration of Drive into Motor Housing	Integrate OEM Circuitry onto Drive PCB
Mount OEM PCB onto Drive Without Cables	Custom Control Loop Tuned to Motor Characteristic
Multi-axis Configuration for Compact System	Custom I/O Interface for System Compatibility
Custom PCB and Baseplate for Optimized Footprint	Preset Switches and Pots to Reduce User Setup
RTV/Epoxy Components for High Vibration	Optimized Switching Frequency
OEM Specified Connectors for Instant Compatibility	A Ramped Velocity Command for Smooth Acceleratio
OEM Specified Silkscreen for Custom Appearance	A Remove Unused Features to Reduce OEM Cost
Increased Thermal Limits for High Temp. Operation	Application Specific Current and Voltage Limits

Feel free to contact Applications Engineering for further information and details.

Available Accessories

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit <u>www.a-m-c.com</u> to see which accessories will assist with your application design and implementation.

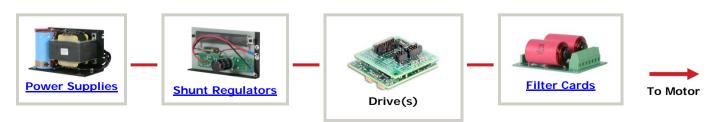



All specifications in this document are subject to change without wither the conduct may differ from pictures provided in this document.