



Description

The PS16 unregulated power supplies have been designed to complement *ADVANCED* Motion Controls' servo drives. Model PS16 is mounted on a base plate for multi-axis applications (mounting space provided on base plate for up to 6 drives). Model PS16-L is mounted on an "L"-shaped bracket for single-axis applications. These unregulated DC power sources are an excellent solution for most applications as *ADVANCED* Motion Controls'servo drives compensate for power supply output variations and AC ripple components.

PS16 Series power supplies are designed to provide the best cost-per-watt value. They have multiple windings for either 120 VAC (PS16L) or 240 VAC (PS16H) 50/60 Hz operation. These power supplies incorporate either a 30V, 36V or a 40V output transformer. The 30V and 40V transformers have four identical secondary windings and the 36V transformers have two identical secondary windings. These windings can be connected in series or in parallel for different output voltages and currents.

Ordering Note: For the L-Bracket option, add a "-L" to the end of each part number (e.g. PS16L40-L)

Power Supplies





PS16x30,36,40,60,72,80

PS16x30,36,40,60,72,80-L





PS16x120,160

PS16x120,160-L





PS16L170

PS16L170-L

Output

Note: AC Power Cord included only with 120 VAC input models

Features

Model

- Multiple Primary Windings: Either 120 VAC or 240 VAC, 50/60 Hz Operation
- ▲ 30 VDC, 36 VDC or 40 VDC Secondary Output Winding Taps
- ▲ Isolation Transformer on All Power Supply Models Except the PS16L170 and PS16L170-L

Output

▲ Small Size, Low Cost, Ease of Use

DC Output

Agency Approvals

Power Supplies



Compliant with European CE for both the Class A EMC Directive 2004/108/EC on Electromagnetic Compatibility (specifically EN 61000-6-4:2007 and EN 61000-6-2:2005) and LVD requirements of directive 2006/95/EC (specifically EN 60204-1:2006), a low voltage directive to protect users from electrical shock.



RoHS (Reduction of Hazardous Substances) is intended to prevent hazardous substances such as lead from being manufactured in electrical and electronic equipment.

	Number	Voltage	Current	Power	Isolation
	PS16L30	30 VDC	27 A	800 W	YES
	PS16L36	36 VDC	22 A	800 W	YES
	PS16L40	40 VDC	20 A	800 W	YES
120 VAC	PS16L60	60 VDC	13 A	800 W	YES
Single	PS16L72	72 VDC	11 A	800 W	YES
Phase Input	PS16L80	80 VDC	10 A	800 W	YES
	PS16L120	120 VDC	7 A	800 W	YES
	PS16L160	160 VDC	5 A	800 W	YES
	PS16L170	170 VDC	15 A	2550 W	NO
	PS16H30	30 VDC	27 A	800 W	YES
240 VAC Single Phase Input	PS16H36	36 VDC	22 A	800 W	YES
	PS16H40	40 VDC	20 A	800 W	YES
	PS16H60	60 VDC	13 A	800 W	YES
	PS16H72	72 VDC	11 A	800 W	YES
	PS16H80	80 VDC	10 A	800 W	YES
	PS16H120	120 VDC	7 A	800 W	YES
	PS16H160	160 VDC	5 A	800 W	YES
·					





SPECIFICATIONS


Power Specifications (120 VAC Single Phase Power Supplies)										
Description	Units	PS16L30	PS16L36	PS16L40	PS16L60	PS16L	.72 PS16L	80 PS16L120	PS16L160	PS16L170
AC Supply Voltage Input	VAC	120								
AC Supply Input Frequency	Hz	50-60 Hz								
AC Supply Input Phases	-	Single Phase								
Output Voltage	VDC	30	36	40	60	72	80	120	160	170
Current Output	Α	27	22	20	13	11	10	7	5	15
Power Specifications (240 VAC Single Phase Power Supplies)										
Description	Units	PS16H30	PS16H36	PS16H4	0 PS16	6H60	PS16H72	PS16H80	PS16H120	PS16H160
AC Supply Voltage Input	VAC	240								
AC Supply Input Frequency	Hz	50-60 Hz								
AC Supply Input Phases	-	Single Phase								
Output Voltage	VDC	30	36	40	60	0	72	80	120	160
Current Output	Α	27	22	20	13	3	11	10	7	5


Mechanical Specifications					
Description	Units	PS16	PS16-L		
AC Input Connector ¹	-	AC Cord Supplied			
DC Output Connector	-	Screw Terminals	Flying Leads		
Size (H x W x D) ²	mm (in)	330.2 x 266.7 x 152.4 (13.00 x 10.50 x 6.00)	254 x 125.4 x 144.8 (10.00 x 4.94 x 5.70)		
Weight	kg (lbs)	11.3 (25)	9.5 (21)		

Notes


- 1. AC Cord included with 120 VAC input models only.
- 2. Worst case depth dimension. Depth varies with model number. See mounting dimensions for additional details.


BLOCK DIAGRAMS





*Contact factory prior to rewiring transformer primary or secondary

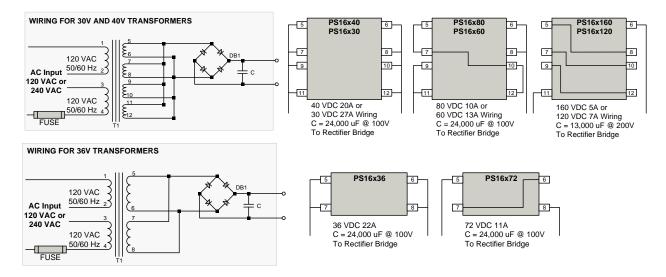








MOUNTING DIMENSIONS


Mounting Dimensions for PS16

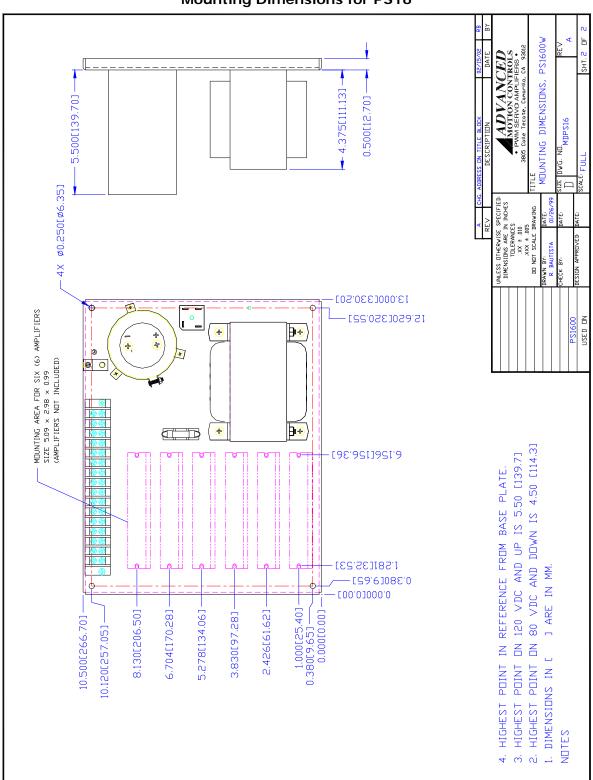





Mounting Dimensions for PS16-L

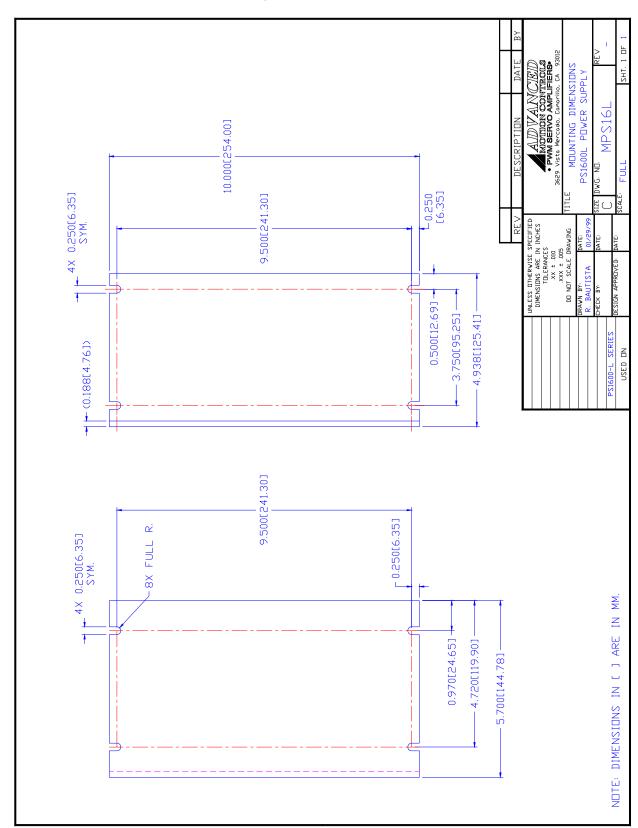



Sold & Serviced By:

ELECTROMATE

Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

www.electromate.com
sales@electromate.com

CUSTOMIZATION INFORMATION

ADVANCED Motion Controls' products are available in many configurations. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability. Feel free to contact Applications Engineering for further information and details.

Examples of Customized Products

- Optimized Footprint
- ▲ Private Label Software
- ▲ OEM Specified Connectors
- No Outer Case
- Increased Current Resolution
- ▲ Increased Temperature Range
- ▲ Custom Control Interface
- ▲ Integrated System I/O

- ▲ Tailored Project File
- Silkscreen Branding
- Optimized Base Plate
- ▲ Increased Current Limits
- ▲ Increased Voltage Range
- Conformal Coating
- ▲ Multi-Axis Configurations
- ▲ Reduced Profile Size and Weight

Available Accessories

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit www.a-m-c.com to see which accessories will assist with your application design and implementation.

