

Description

The DVC200A100 DigiFlex® Performance™ digital servo drive is designed to drive brushed, brushless, and AC induction servomotors from a compact form factor ideal for embedded applications. This fully digital drive operates in torque, velocity, or position mode and employs Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM.

DVC200A100 servo drives feature a single USB interface used for drive configuration and setup. Drive commissioning is accomplished using DriveWare® 7, available for download at www.a-m-c.com. The CANopen interface can be used for runtime operation in networked applications.

DVC200A100 servo drives are packaged in a ruggedized, watertight IP65 rated enclosure ideal for mobile electric vehicular applications. Multiple throttle input command types and configurations are available for selection within DriveWare® 7.

All drive and motor parameters are stored in non-volatile memory.

Power Range

| | |
|--------------------|-------------|
| Peak Current | 200 A |
| Continuous Current | 125 A |
| Supply Voltage | 20 - 80 VDC |



Features

- ▲ Four Quadrant Regenerative Operation
- ▲ Space Vector Modulation (SVM) Technology
- ▲ Fully Digital State-of-the-art Design
- ▲ Programmable Gain Settings
- ▲ Fully Configurable Current, Voltage, Velocity and Position Limits
- ▲ Four Quadrant Regenerative Operation
- ▲ PIDF Velocity Loop
- ▲ PID + FF Position Loop
- ▲ On-the-Fly Mode Switching
- ▲ On-the-Fly Gain Set Switching
- ▲ Selectable 120/60 Hall Commutation Phasing
- ▲ Ingress Protection Rating: IP65
- ▲ Electromagnetic Holding Brake Output
- ▲ Safe Torque Off (STO) Inputs

MODES OF OPERATION

- Profile Current
- Profile Velocity
- Profile Position
- Cyclic Synchronous Current Mode
- Cyclic Synchronous Velocity Mode
- Cyclic Synchronous Position Mode

COMMAND SOURCE

- ±10 V Analog
- Over the Network
- Vehicle Specific Commands
- Sequencing
- Indexing
- Jogging

FEEDBACK SUPPORTED

- ±10 VDC Position
- Halls
- Incremental Encoder
- Tachometer (±10 VDC)

INPUTS/OUTPUTS

- 2 Programmable High Powered Digital Outputs
- 2 Programmable Analog Inputs (12-bit Resolution)
- 4 Programmable Digital Inputs (Single-Ended)
- 2 Programmable Digital Outputs (Single-Ended)

COMPLIANCES & AGENCY APPROVALS


- UL
- cUL
- RoHS
- CE Pending

Sold & Serviced By:



Toll Free Phone (877) SERV098
 Toll Free Fax (877) SERV099
www.electromate.com
sales@electromate.com

BLOCK DIAGRAM

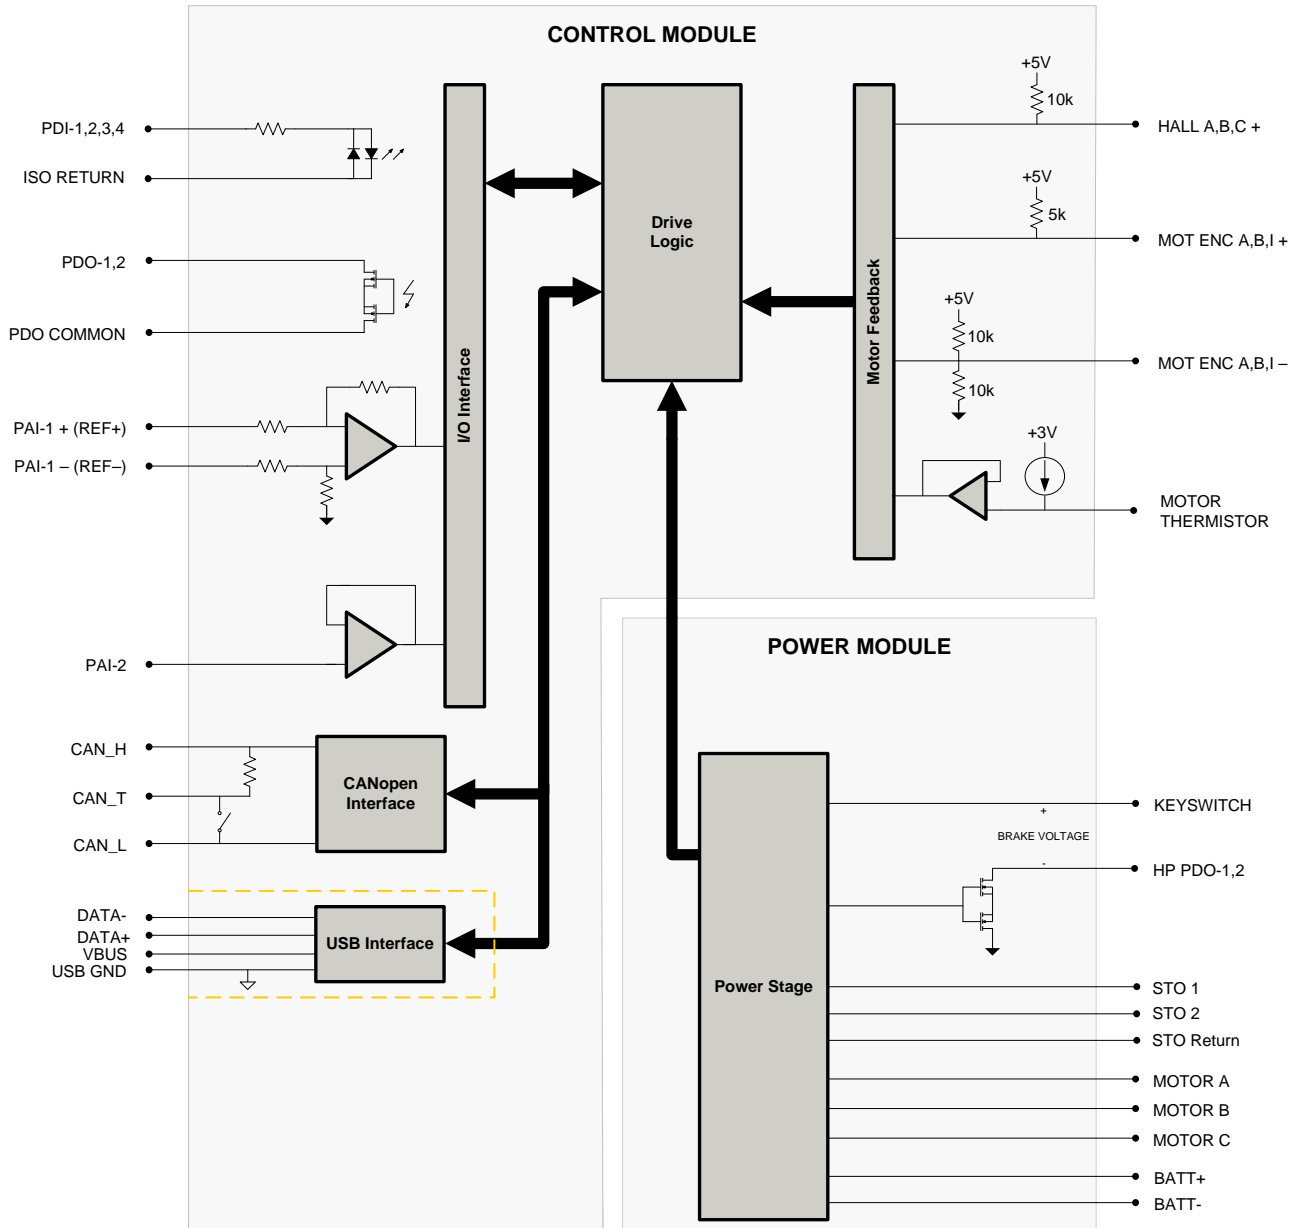

Information on Approvals and Compliances



US and Canadian safety compliance with UL 508c, the industrial standard for power conversion electronics. UL registered under file number E140173. Note that machine components compliant with UL are considered UL registered as opposed to UL listed as would be the case for commercial products.



Sold & Serviced By:
ELECTROMATE
 RoHS (Reduction of Hazardous Substances) is intended to prevent hazardous substances such as lead from being manufactured in electrical and electronic equipment.

Toll Free Phone (877) SERV098
 Toll Free Fax (877) SERV099
www.electromate.com
sales@electromate.com

SPECIFICATIONS

| Power Specifications | | |
|---|---------|--|
| Description | Units | Value |
| DC Supply Voltage Range | VDC | 20 - 80 |
| DC Bus Over Voltage Limit | VDC | 92 |
| DC Bus Under Voltage Limit | VDC | 16 |
| Logic Supply Voltage (Keyswitch) | VDC | 20 - 80 |
| Safe Torque Off Voltage | VDC | 24 (±6) |
| Maximum Peak Output Current ¹ | A | 200 |
| Maximum Continuous Output Current | A | 125 |
| Max. Continuous Output Power | W | 9500 |
| Max. Continuous Power Dissipation | W | 500 |
| Internal Bus Capacitance | µF | 6000 |
| Minimum Load Inductance (Line-To-Line) ² | µH | 200 |
| Switching Frequency | kHz | 14 |
| Maximum Output PWM Duty Cycle | % | 85 |
| Control Specifications | | |
| Description | Units | Value |
| Command Sources | - | ±10 V Analog, 0 – 5 V Analog, 0 – 5 kΩ, Over the Network, Sequencing, Indexing, Jogging |
| Feedback Supported | - | ±10 VDC Position, Halls, Incremental Encoder, Tachometer (±10 VDC) |
| Commutation Methods | - | Sinusoidal, Trapezoidal |
| Modes of Operation | - | Profile Current, Profile Velocity, Profile Position, Cyclic Synchronous Current Mode, Cyclic Synchronous Velocity Mode, Cyclic Synchronous Position Mode |
| Motors Supported | - | Closed Loop Vector, Single Phase (Brushed, Voice Coil, Inductive Load), Three Phase (Brushless) |
| Hardware Protection | - | 40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage |
| Programmable Digital Inputs/Outputs (PDIs/PDOs) | - | 4/4 |
| Programmable Analog Inputs/Outputs (PAIs/PAOs) | - | 2 |
| Primary I/O Logic Level | - | 24 VDC |
| Current Loop Sample Time | µs | 71 |
| Velocity Loop Sample Time | µs | 143 |
| Position Loop Sample Time | µs | 143 |
| Maximum Encoder Frequency | MHz | 20 (5 pre-quadrature) |
| Mechanical Specifications | | |
| Description | Units | Value |
| Agency Approvals | - | UL, cUL, RoHS, CE Pending |
| Size (H x W x D) | mm (in) | 203.2 x 139.7 x 59.7 (8.0 x 5.5 x 2.4) |
| Size (H x W x D) with 35-pin mating connector installed | mm (in) | 203.2 x 139.7 x 74.0 (8.0 x 5.5 x 2.9) |
| Weight | g (oz) | 1638.60 (57.80) |
| Heatsink (Base) Temperature Range ³ | °C (°F) | 0 - 75 (32 - 167) |
| Storage Temperature Range | °C (°F) | -20 - 85 (-4 - 185) |
| Cooling System ³ | - | Natural Convection |
| Form Factor | - | Vehicle Mount |
| IP Rating | - | 65 |
| I/O Connector | - | 35-pin, AMPSEAL connector |
| AUX COMM Connector | - | 5-pin, Mini USB B Type port |
| MOTOR POWER Connector | - | 3 Individual M6 threaded terminals |
| POWER Connector | - | 2 Individual M6 threaded terminals |

Notes

- Maximum duration of peak current is ~10 seconds for zero-to-peak current commands.
- Lower inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements.
- Additional cooling and/or heatsink is required to achieve rated performance. Thermal grease recommended between baseplate and external heatsink.

Mating Connector Kit

Mating connector housing, socket contacts, and seal plugs can be ordered as a kit using *ADVANCED* Motion Controls' part number **KC-35AMPSEAL01**.

Sold & Serviced By:



Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

www.electromate.com

sales@electromate.com

PIN FUNCTIONS

| I/O - Signal Connector | | | |
|------------------------|------------------|---|--------|
| Pin | Name | Description / Notes | I/O |
| 1 | HP PDO-1 | High Powered Programmable Digital Output | O |
| 2 | PDI COMMON | Digital Inputs Ground | PDIGND |
| 3 | PDI-1 | Programmable Digital Input | I |
| 4 | PDO COMMON | Digital Outputs Ground | PDOGND |
| 5 | STORET | Safe Torque Off Return | STORET |
| 6 | PAI-2 | Programmable Analog Input (12-bit Resolution) | I |
| 7 | PAI COMMON | Analog Inputs Ground | PGND |
| 8 | CAN_T | CAN Termination. Connect to CAN_L (Pin 19) if drive is the last device on the CAN network, or use DIP Switch #7 – see Hardware Settings for switch description. | I/O |
| 9 | MOT ENC A+ | Differential Encoder A Channel Input (For Single Ended Signals Use Only Positive Input) | I |
| 10 | MOT ENC B+ | Differential Encoder B Channel Input (For Single Ended Signals Use Only Positive Input) | I |
| 11 | MOT ENC I+ | Differential Encoder Index Input (For Single Ended Signals Use Only Positive Input) | I |
| 12 | +5V OUT | +5V 250mA Encoder and Hall Supply Output (Short Circuit Protected) | O |
| 13 | HP PDO-2 | High Powered Programmable Digital Output | O |
| 14 | PDI-2 | Programmable Digital Input | I |
| 15 | PDO-1 | Programmable Digital Output | O |
| 16 | STO-1 | Safe Torque Off – Input 1. | I |
| 17 | POT HIGH | +5V @ 5 mA output supply. For external 5k potentiometer command. Reference to pin 7. | O |
| 18 | PAI-1- (REF-) | Differential Programmable Analog Input or Reference Signal Input (12-bit Resolution) | I |
| 19 | CAN_L | CAN_L Line (Dominant Low) | I |
| 20 | MOT ENC A- | Differential Encoder A Channel Input (For Single Ended Signals Use Only Positive Input) | I |
| 21 | MOT ENC B- | Differential Encoder B Channel Input (For Single Ended Signals Use Only Positive Input) | I |
| 22 | MOT ENC I- | Differential Encoder Index Input (For Single Ended Signals Use Only Positive Input) | I |
| 23 | FEEDBACK COMMON | Motor Feedback Ground | PGND |
| 24 | KEYSWITCH | Master switch for the drive. Logic power input supply. Voltage range equal to DC Supply Voltage Range (see specifications table). This must be ON for the drive to function. Reference to Power Ground. | I |
| 25 | PDI-3 | Programmable Digital Input | I |
| 26 | PDI-4 | Programmable Digital Input | I |
| 27 | PDO-2 | Programmable Digital Output | O |
| 28 | STO-2 | Safe Torque Off – Input 2 | I |
| 29 | PAI-1+ (REF+) | Differential Programmable Analog Input or Reference Signal Input (12-bit Resolution) | I |
| 30 | CAN_GND | CANopen Ground | PGND |
| 31 | CAN_H | CAN_H Line (Dominant High) | I |
| 32 | HALL 1 | Commutation Sensor Inputs | I |
| 33 | HALL 2 | | I |
| 34 | HALL 3 | | I |
| 35 | MOTOR THERMISTOR | Motor Thermistor Connection. | I |

AUX. COMM - USB Communication Connector

| Pin | Name | Description / Notes | I/O |
|-----|----------|---------------------|------|
| 1 | VBUS | Supply Voltage | O |
| 2 | DATA - | Data - | I/O |
| 3 | DATA + | Data + | I/O |
| 4 | RESERVED | - | - |
| 5 | USB GND | USB Ground | UGND |

MOTOR POWER - Power Connector

| Terminal | Name | Description / Notes | I/O |
|----------|---------|---------------------|-----|
| MA | MOTOR A | Motor Phase A | O |
| MB | MOTOR B | Motor Phase B | O |
| MC | MOTOR C | Motor Phase C | O |

POWER - Power Connector

| Terminal | Name | Description / Notes | I/O |
|----------|-----------------------|--------------------------------|------|
| B- | BATT - / POWER GROUND | Power Ground | PGND |
| B+ | BATT + | DC Power Input. Battery Power. | I |

Sold & Serviced By:



Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

www.electromate.com
sales@electromate.com

I/O FEATURES

Programmable Analog Inputs

The Programmable Analog Inputs have voltage ranges of 0 to +5V for PAI-2 and -10 to +10V for PAI-1.

| Function | Description / Notes |
|----------------|---|
| Command Inputs | Vehicle Throttle Command Interfaces may be configured for Wigwag or Inverse Wigwag through the setup software. <ul style="list-style-type: none">• 3-wire 5k Potentiometer Command• 5V Voltage Command |

Programmable Digital Inputs

The Programmable Digital Inputs are +24VDC sinking or sourcing single-ended inputs.

Programmable Digital Outputs

The Programmable Digital Outputs are +24VDC sinking single-ended outputs. These can be used for standard fault output signals or used to sink an external LED.

Safe Torque Off (STO) Inputs

The Safe Torque Off (STO) Inputs are dedicated +24VDC sinking single-ended inputs. Both STO1 and STO2 must be active (HIGH) to allow torque output at the motor outputs.

(Functional Safety STO meets SIL 3 per IEC 61800-5-2; tested by NRTL.)

High Powered Programmable Digital Outputs

The High Powered Programmable Digital Outputs are DIP Switch selectable for 24, 36, 48, or 72 V and sink up to 3A. A user-supplied load can be connected between the external Keyswitch supply and the HPDO. See Hardware Settings section for DIP Switch functionality. Examples of possible uses are given below.

| Function | Description / Notes |
|-------------------------------|--|
| Electromagnetic Holding Brake | When activated, the HPDO will energize an external user-supplied holding brake and release the motor. Electromagnetic holding brake is normally engaged to lock the motor shaft and keep the rotor from turning when the vehicle is stopped. |
| Main Contactor | When activated, the HPDO will engage the external user-supplied main power contactor to connect DC Bus power from the battery to the drive. |

Sold & Serviced By:



Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

www.electromate.com

sales@electromate.com

HARDWARE SETTINGS

Switch Functions

DIP Switches are located under the drive access panel. DIP Switch changes take effect after power cycling the drive.

| Switch | Description | Setting | |
|--------|--|------------------|----------------------|
| | | On | Off |
| 1 | Bit 0 of binary CANopen node ID. | 1 | 0 |
| 2 | Bit 1 of binary CANopen node ID. | 1 | 0 |
| 3 | Bit 2 of binary CANopen node ID. | 1 | 0 |
| 4 | Bit 3 of binary CANopen node ID. | 1 | 0 |
| 5 | Bit 4 of binary CANopen node ID. | 1 | 0 |
| 6 | Bit 5 of binary CANopen node ID. | 1 | 0 |
| 7 | CAN Termination. Internally connects 120 ohm resistor between CAN_H and CAN_L. Set to ON if drive is the last device on the network. | Terminating Node | Non-Terminating Node |
| 8 | HPDO Voltage Selection. See HPDO Voltage Selection Table below for DIP Switch Settings. | - | - |
| 9 | | - | - |
| 10 | | - | - |

HPDO Voltage Selection Table

| HPDO Voltage | SW8 | SW9 |
|--------------|-----|-----|
| 24V | OFF | OFF |
| 36V | ON | OFF |
| 48V | OFF | ON |
| 72V | ON | ON |

CANopen Communication Bit Rate

The default CANopen bit rate is set in EEPROM at 1000 kbits/sec.

Sold & Serviced By:



Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099


www.electromate.com

sales@electromate.com

MECHANICAL INFORMATION


I/O - Signal Connector

| | | |
|-----------------------|---------------------|---|
| Connector Information | | 35-pin, AMPSEAL connector |
| Mating Connector | Details | TE Connectivity: Housing P/N 776164-1; Socket Contacts P/N 770854-3 (loose); Seal Plug P/N 770678-1; Crimp Tool P/N 58529-1 |
| | Included with Drive | No |

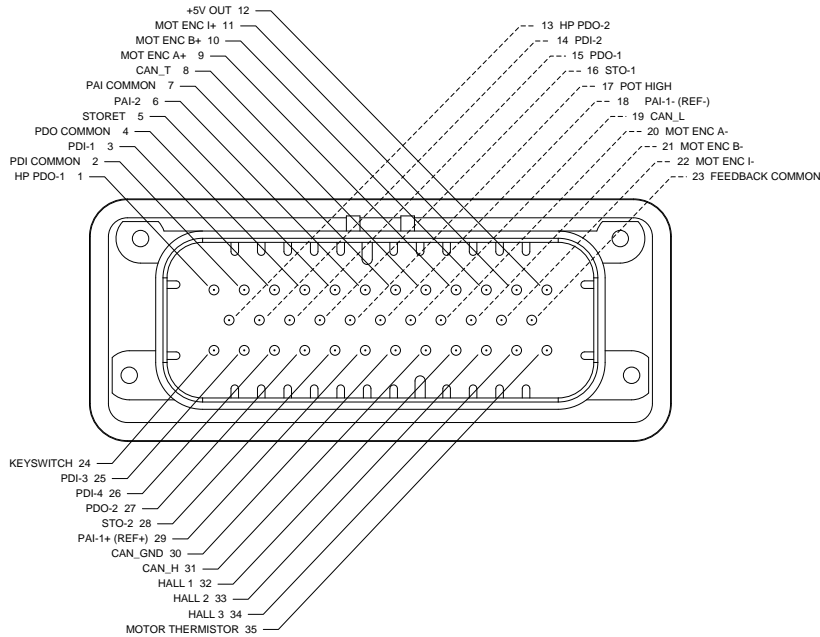

AUX. COMM – USB Communication Connector

| | | |
|------------------------|---------------------|--|
| Connector Information | | 5-pin, Mini USB B Type port |
| Suggested Mating Cable | Details | TYCO: 1496476-3 (2-meter STD-A to MINI-B ASSY) |
| | Included with Drive | No |



MOTOR POWER - Power Connector

| | | |
|-----------------------|---------------------|--|
| Connector Information | | Three individual M6 threaded terminals |
| Mating Connector | Details | M6 screw or bolt with washer |
| | Included with Drive | Yes |

POWER - Power Connector

| | | |
|-----------------------|---------------------|--------------------------------------|
| Connector Information | | Two individual M6 threaded terminals |
| Mating Connector | Details | M6 screw or bolt with washer |
| | Included with Drive | Yes |

Sold & Serviced By:




Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099


www.electromate.com

sales@electromate.com

MOUNTING DIMENSIONS

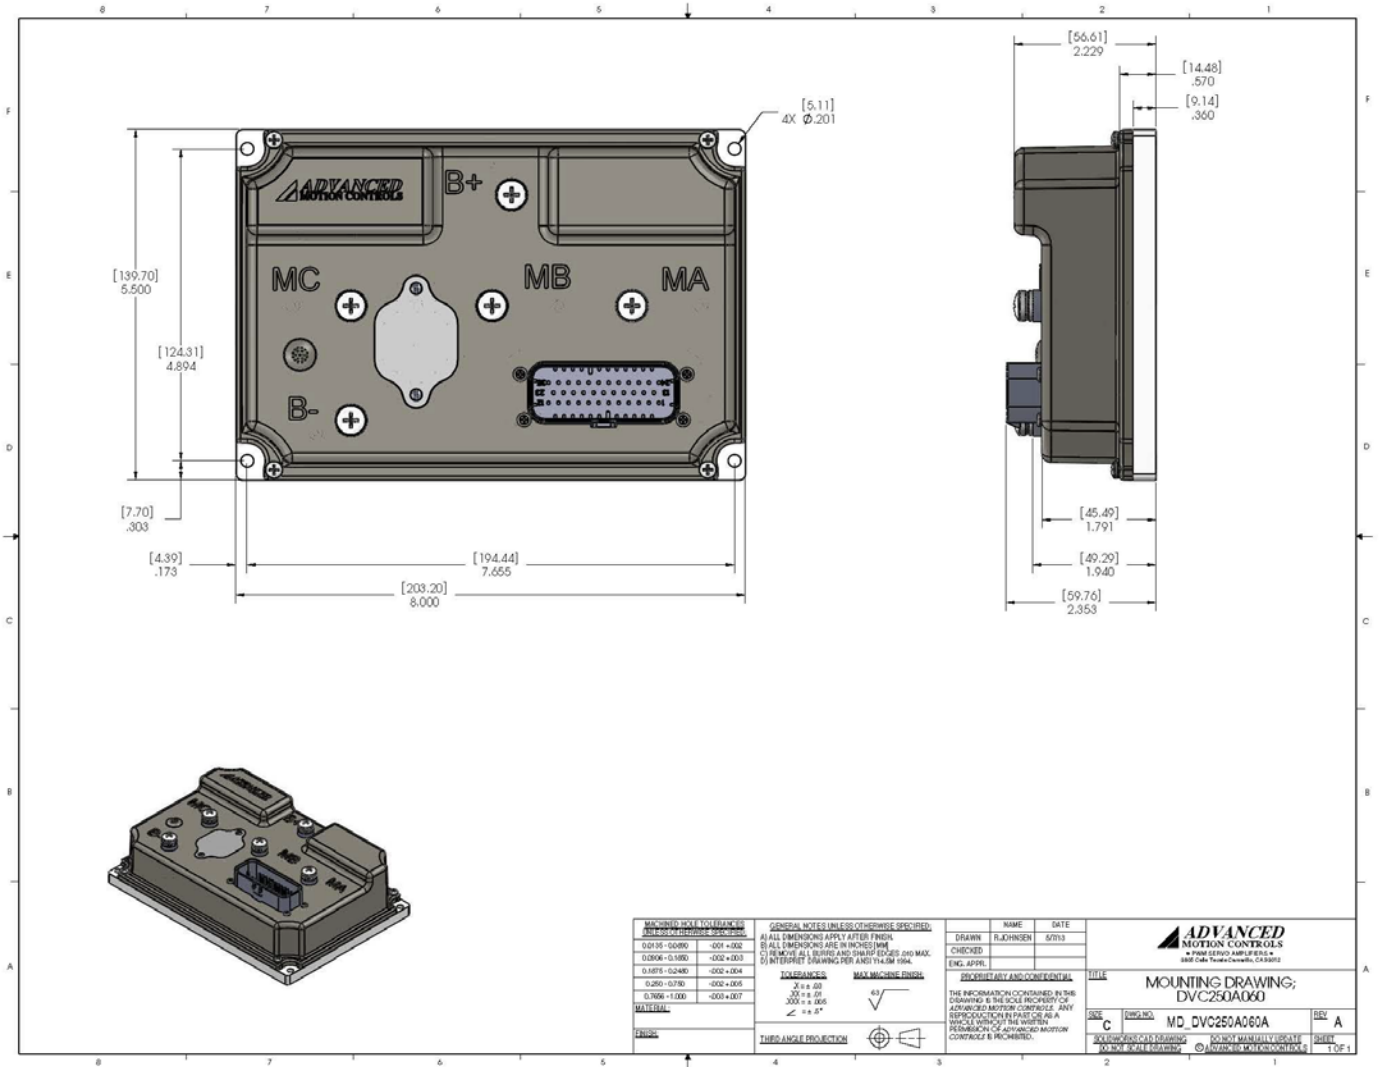

PART NUMBERING INFORMATION

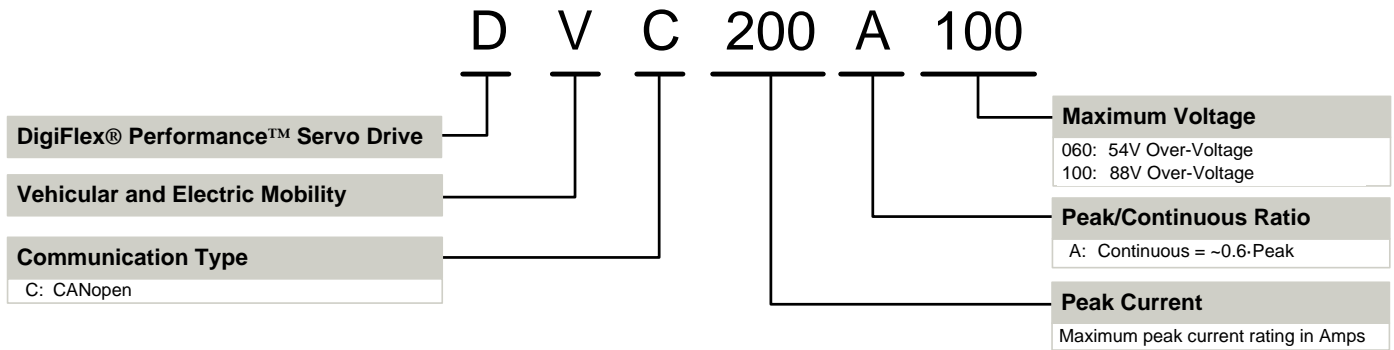

ADVANCED Motion Controls servo drives are available in many configurations. Note that not all possible part number combinations are offered as standard drives. All models listed in the selection tables of the website are readily available, standard product offerings.

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, ADVANCED Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability.

Examples of Customized Products

- ▲ Integration of Drive into Motor Housing
- ▲ Mount OEM PCB onto Drive Without Cables
- ▲ Multi-axis Configuration for Compact System
- ▲ Custom PCB and Baseplate for Optimized Footprint
- ▲ RTV/Epoxy Components for High Vibration
- ▲ OEM Specified Connectors for Instant Compatibility
- ▲ OEM Specified Silkscreen for Custom Appearance
- ▲ Increased Thermal Limits for High Temp. Operation
- ▲ Integrate OEM Circuitry onto Drive PCB
- ▲ Custom Control Loop Tuned to Motor Characteristics
- ▲ Custom I/O Interface for System Compatibility
- ▲ Preset Switches and Pots to Reduce User Setup
- ▲ Optimized Switching Frequency
- ▲ Ramped Velocity Command for Smooth Acceleration
- ▲ Remove Unused Features to Reduce OEM Cost
- ▲ Application Specific Current and Voltage Limits

Feel free to contact Applications Engineering for further information and details.

Sold & Serviced By:



Toll Free Phone (877) SERV098

Toll Free Fax (877) SERV099

www.electromate.com
sales@electromate.com