Kollmorgen Stainless Steel Washdown Motor Selection Guide



KOLLMORGEN

Because Motion Matters™



Kollmorgen. Every solution comes from a real understanding of OEM challenges.

The ever-escalating demands of the marketplace mean increased pressure on OEMs at every turn. Time constraints. Demands for better performance. Having to think about the next-generation machine even before the current one is built. While expectations are enormous, budgets are not. Kollmorgen's innovative motion solutions and broad range of quality products help engineers not only overcome these challenges but also build truly differentiated machines.

Because motion matters, it's our focus. Motion can distinctly differentiate a machine and deliver a marketplace advantage by improving its performance. This translates to overall increased efficiency for your application. Perfectly deployed machine motion can make your customer's machine more reliable and efficient, enhance accuracy and improve operator safety. Motion also represents endless possibilities for innovation. We've always understood this potential, and thus have kept motion at our core, relentlessly developing products that offer precision control of speed, accuracy and position in machines that rely on complex motion.



KOLLMORGEN

Because Motion Matters™

Removing the Barriers of Design, Sourcing, and Time

At Kollmorgen, we know that OEM engineers can achieve a lot more when obstacles aren't in the way. So, we knock them down in three important ways:

Integrating Standard and Custom Products

The optimal solution is often not clear-cut. Our application expertise allows us to modify standard products or develop totally custom solutions across our whole product portfolio so that designs can take flight.

Providing Motion Solutions, Not Just Components

As companies reduce their supplier base and have less engineering manpower, they need a total system supplier with a wide range of integrated solutions. Kollmorgen is in full response mode with complete solutions that combine programming software, engineering services and best-in-class motion components.

Global Footprint

With direct sales, engineering support, manufacturing facilities, and distributors across North America, Europe, Middle East, and Asia, we're close to OEMs worldwide. Our proximity helps speed delivery and lend support where and when they're needed.

Financial and Operational Stability

Kollmorgen is part of Danaher Corporation, our \$13B parent company. A key driver in the growth of all Danaher divisions is the Danaher Business System, which relies on the principle of "kaizen" – or continuous improvement. Using world-class tools, cross-disciplinary teams of exceptional people evaluate processes and develop plans that result in superior performance.

Table of Contents

Stainless Steel Washdown Motors	4
Stainless Steel Washdown Motor Overview	6
Stainless Steel W(H)10x Series Motors	8
W(H)10x Dimensional Data & Outline Drawings	8
W(H)10x Performance Data	9
Stainless Steel W(H)20x Series Motors	10
W(H)20x Dimensional Data & Outline Drawings	10
W(H)20x Performance Data	11
Stainless Steel W(H)40x Dimensional Data	12
W(H)40x Dimensional Data & Outline Drawings	12
W(H)40x Performance Data	13
Stainless Steel W(H)60x Dimensional Data	14
W(H)60x Dimensional Data & Outline Drawings	14
W(H)60x Performance Data	15
Stainless Steel W(H)80x Dimensional Data	16
W(H)80x Dimensional Data & Outline Drawings	16
W(H)80x Performance Data	17
Connector Options	18
Model Nomenclature	20
AquaTRUE Gearhead IP66/67 and IP69	21
Kollmorgen Offers Solutions For Food, Beverage and Pharmaceutical Industries	22
Kollmorgen Has The Solution To Meet Your Specific Application Nedds	23





Stainless Steel Washdown Motors

Kollmorgen has leveraged over 30 years of custom motors designed for the most challenging of environments. The most notable were the motors used in Jason Jr., the ROV that was used to discover the Titanic. The culmination of these experiences has resulted in our Stainless Steel Washdown series of motors. These motors are designed to meet the toughest hygienic requirements in the industry.

The features of the Stainless Steel Washdown series of motors meet the highly regulated specifications of the food, beverage and pharmaceutical industries. Our stainless steel motors are designed for high pressure, high temperature, and caustic washdown applications. The round motor reduces square edges that could allow for the build-up of foreign material and bacteria. Standard features include feedback and power cables that allow for the easy venting of the motor to prevent internal condensation. Our standard configurations give us the broadest stainless steel motor offering specifically constructed for use in sterile environments.

If you have strict aseptic requirements, or if your machine design requires the highest standards with respect to hygiene, the all Stainless Steel Washdown series was designed with you in mind. These motors combine years' worth of experience in tough environments, with an easy to clean design. Our motors are perfect for the applications that are found in food, beverage and pharmaceutical industries. Kollmorgen's Stainless Steel Washdown motors help you to maintain the highest standard of cleanliness in your machine.



The Benefits Of Stainless Steel Washdown Motors

 Your machine not only looks more appealing and sanitary it actually is: clean and smooth surfaces help your customer prevent food trapping and helps prevent bacteria and other contaminates Aseptic motor helps you exceed tough regulation requirements Food grade grease Food grade shaft seal Aesthetically pleasing Laser etched nameplate IP69K sealing Precision balanced Low cogging motor design Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. 							
 Aseptic motor helps you exceed tough regulation requirements Aseptic motor helps you exceed tough regulation requirements Food grade grease Food grade shaft seal Aesthetically pleasing Laser etched nameplate IP69K sealing Precision balanced Low cogging motor design Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. 	clean and smooth surfaces help your customer prevent food trapping						
 Food grade grease Food grade shaft seal Aesthetically pleasing Laser etched nameplate We will help you select what level of imperviousness you need to eliminate downtime and reduce cost of maintenance IP69K sealing Precision balanced Low cogging motor design Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. 		 Round housing for easing cleaning 					
 Aesthetically pleasing Laser etched nameplate We will help you select what level of imperviousness you need to eliminate downtime and reduce cost of maintenance IP69K sealing Precision balanced Low cogging motor design Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. Aesthetically pleasing IP69K sealing IP69K s	Aseptic motor helps you exceed tough regulation requirements	Food grade grease					
 Laser etched nameplate Laser etched nameplate We will help you select what level of imperviousness you need to eliminate downtime and reduce cost of maintenance IP69K sealing Precision balanced Low cogging motor design Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. In the spend less time tweaking In the spend less time tweaking Continuous torques to 80 Nm 		Food grade shaft seal					
 We will help you select what level of imperviousness you need to eliminate downtime and reduce cost of maintenance Precision balanced Low cogging motor design Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. In the specific of the		Aesthetically pleasing					
eliminate downtime and reduce cost of maintenance Precision balanced Low cogging motor design Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Continuous torques to 80 Nm Continuous torques to 80 Nm 		Laser etched nameplate					
 Precision balanced Low cogging motor design Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. 16 Frame/stack length combinations Continuous torques to 80 Nm 		• IP69K sealing					
 Air purge port standard Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. 16 Frame/stack length combinations Continuous torques to 80 Nm 	eliminate downtime and reduce cost of maintenance						
 Innovative cable design that allows for venting of motor Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. 16 Frame/stack length combinations Continuous torques to 80 Nm 							
 Motor designed to eliminate the need for addition housings Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. 16 Frame/stack length combinations Continuous torques to 80 Nm 		Air purge port standard					
 Our customizable fit will meet your needs. You spend less time tweaking your machine's mechanicals. 16 Frame/stack length combinations Continuous torques to 80 Nm 		 Innovative cable design that allows for venting of motor 					
your machine's mechanicals. • Continuous torques to 80 Nm		• Motor designed to eliminate the need for addition housings					
Continuous torques to 80 Nm		• 16 Frame/stack length combinations					
Peak torques to 390 Nm	your machine's mechanicals.	Continuous torques to 80 Nm					
		Peak torques to 390 Nm					
 Multiple popular connector and cable options standard 		Multiple popular connector and cable options standard					
 Windings designed to optimize the performance of your machine 		• Windings designed to optimize the performance of your machine					
 Flying lead cable option designed to eliminate the need for interme cables 		 Flying lead cable option designed to eliminate the need for intermediate cables 					

• Rated speeds to 7500 rpm



Stainless Steel Washdown Motor Overview




- 5 Frame Sizes
- 16 Frame/Stack Length Combinations
- Rated Speeds to 7500 rpm
- Up to 80 Nm of Continuous Torque
- Up to 390 Nm of Peak Torque
- IP69K Protection
- 3M and 6M Standard Cable Options
- Food Grade Grease
- Food Grade Shaft Seal
- Aseptic Design





- Precision Balanced Rotor
- Air Purge Port Standard
- Round Housing for Easy Cleaning
- Housing Made from 300 Series Stainless Steel
- Shaft Made from 17-4Ph Stainless Steel
- Standard Flying Lead Cable Option that Aides in Venting Motor
- Manufactured to be Highly Customizable

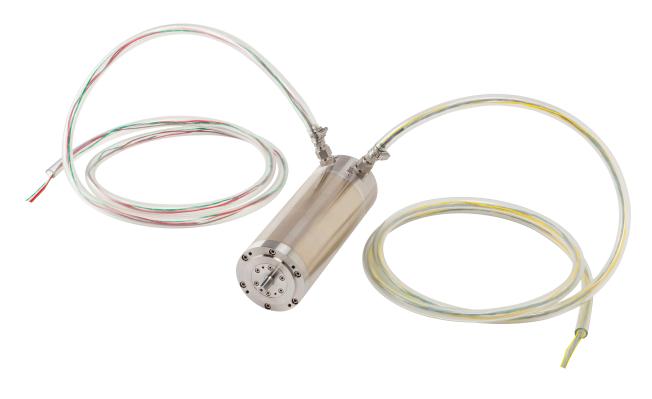

1




Stainless Steel W(H)10x Series Motors

W(H)10x Family Dimensional Data

Shaft Mount Option	Units	Shaft Diameter	Shaft Length	Pilot Diameter	Mtg Hole B.C.	Mtg Hole	Keyway Width	"S" Keyway Length	"T" Shaft Diameter Over Keyway	Shaft Feature
AK	mm	14 ^{+0.008} -0.003	30 ± 0.5	60 ^{+0.012} -0.007	71.14	M6 X 1 THD	5 ⁰ -0.03	15.7	11 +0.00 -0.10	Keyway 5 x 5 x 15
AN	mm	14 ^{+0.008} -0.003	30 ± 0.5	60 ^{+0.012} -0.007	71.14	M6 X 1 THD	-	-	-	Smooth

MODEL	Units	A MAX	"В"
W(H)106	mm	267.5	226.3
W(H)104	mm	237.0	195.8
W(H)102	mm	208.9	167.7

Note: Contact customer support for length of motor with brake.

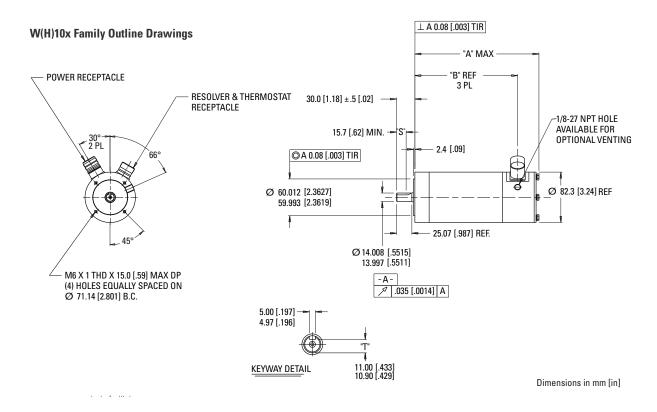



		W-102 W-104		104	W-'	106	WH-102	WH-104	WH-106			
	Parameter	Tol	Symbol	Units	В	Α	В	A	В	A	В	A
	Max Rated DC Bus Voltage	Max	Vbus	Vdc	320	32	20	32	20	640	640	640
	Continuous Torque (Stall) for	Nom	TCS	Nm	0.50	1.06	1.06	1.49	1.49	0.44	0.92	1.2
	ØT winding = 100°C	NUIII	103	lb-ft	0.40	0.78	0.78	1.10	1.10	0.33	0.68	0.91
	Continuous Current (Stall) for \varnothing T winding = 100°C	Nom	TCS	Arms	2.8	2.10	2.86	2.10	4.00	0.63	1.20	1.70
	Max Mechanical Speed	Nom	NMAX	rpm	7500	6000	7500	5000	7500	7500	7500	7500
	Peak Torque	Nom	TP	Nm	2.2	4.4	4.4	6.2	6.4	2.4	4.4	6.3
	i eak loique	NUIT		lb-ft	1.6	3.2	3.3	4.6	4.7	1.8	3.3	4.7
	Peak Current	Nom	IP	Arms	10.5	9.0	12.6	9.0	18.0	3.6	6.3	9.0
	Rated Torque (speed)		Trtd	Nm	0.50	1.0	0.98	1.4	1.3			
<u>9</u>	Tidted Torque (speed)		intu	lb-ft	0.40	0.76	0.72	1.0	0.94			
320 Vdc	Rated Speed		Nrdt	rpm	7500	5600	7500	4200	7500			
m	Rated Power (speed)		Prtd	kW	0.39	0.60	0.77	0.61	1.0			
	Tated Tower (speed)		TTU	hp	0.53	0.81	1.0	0.82	1.3			
	Rated Torque (speed)		Trtd	Nm						0.34	0.8	1.0
<u>9</u>			intu	lb-ft						0.25	0.55	0.7
640 Vdc	Rated Speed		Nrdt	rpm						7500	7500	7500
õ	Rated Power (speed)		Prtd	kW						0.26	0.59	0.76
			TTU	hp						0.35	0.79	1.0
	Torque Constant	±10%	Kt	Nm/Arms	0.21	0.51	0.37	0.72	0.37	0.71	0.74	0.74
	lorque oblistant	10 /0	Kt	lb-ft/Arms	0.15	0.38	0.27	0.53	0.27	0.52	0.55	0.55
	Back EMF Constant	±10%	Ke	Vrms/Krpm	12.5	31.0	22.5	43.7	22.5	42.6	44.9	44.9
	Resistance (line-line)	±10%	RM	ohm	2.7	5.3	2.7	6.5	1.6	35	12.4	8.21
	Inductance		L	mH	7.2	28	14	38	9.4	120	58	37.6
	Inertia (includes resolver		JM	kg-m2	3.10E-5	4.61	E-5	7.65	5E-5	3.10E-5	4.61E-5	7.65E-5
	feedback)		UIVI	lb-ft-sec2	2.28E-5	3.40)E-5	5.64	1E-5	2.28E-5	3.40E-5	5.64E-5
	Pole Pairs				2	2	2	2	2	2	2	2

W(H)10x Family Performance Data






Stainless Steel W(H)20x Series Motors

W(H)20x Family Dimensional Data

Shaft Mount Option	Units	Shaft Diameter	Shaft Length	Pilot Diameter	Mtg Hole B.C.	Mtg Hole	Keyway Width	"S" Keyway Length	"T" Shaft Diameter Over Keyway	Shaft Feature
AK	mm	14 ^{+0.008} -0.003	30 ± 0.5	80 +0.013 -0.008	94.49	M6 X 1 THD	5 ⁰ -0.03	14.3	11 +0.00 -0.10	Keyway 5 x 5 x 14
AN	mm	14 ^{+0.008} -0.003	30 ± 0.5	80 +0.013 -0.008	94.49	M6 X 1 THD	-	-	-	-

MODEL	Units	A MAX	"B"
W(H)206	mm	308.0	277.8
W(H)204	mm	268.4	238.2
W(H)202	mm	228.8	198.6

Note: Contact customer support for length of motor with brake.

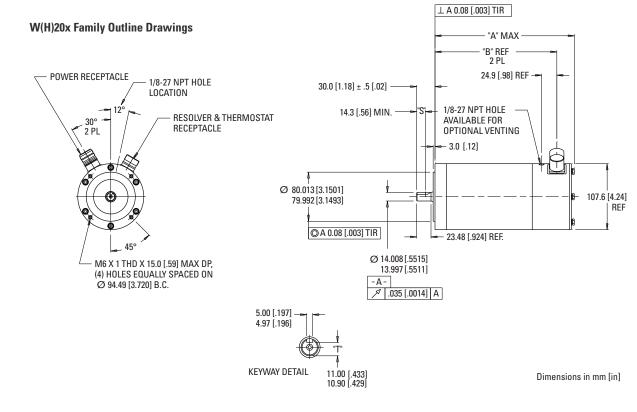



					W-202 W-204		W-:	206	WH	-202	WH	-204	WH	-206		
	Parameter	Tol	Symbol	Units	A	C	A	В	A	В	В	E	A	В	D	E
	Max Rated DC Bus Voltage	Max	Vbus	Vdc	32	20	32	20	32	20	64	10	64	10	64	10
	Continuous Torque (Stall) for ØT winding = 100°C	Nom	TCS	Nm Ib-ft	1.46 1.08	1.49	3.00 2.20	3.00 2.20	4.40 3.26	4.20 3.10	1.4 1.0	1.5 1.1	2.5 1.8	2.6 1.9	3.6 2.7	3.6 2.7
	Continuous Current (Stall) for ØT winding = 100°C	Nom	TCS	Arms	1.11	1.10 3.07	1.80	3.60	2.10	3.90	0.87	3.1	0.75	1.5	6.4	2.0
	Max Mechanical Speed	Nom	NMAX	rpm	2800	6000	2000	4000	1800	3000	4500	7000	2400	4500	7500	4000
	Peak Torque	Nom	TP	Nm	7.49	7.67	13.7	13.8	20.5	19.9	7.1	7.7	13.6	12.9	19.9	20.2
	Teak loique	NUIII	11	lb-ft	5.53	5.65	10.1	10.2	15.1	14.7	5.2	5.7	10.0	9.5	14.7	14.9
	Peak Current	Nom	IP	Arms	6.0	16.6	8.7	17.2	10.0	19.5	4.6	16.6	4.3	8.0	24.3	11.5
	Rated Torque (speed)		Trtd	Nm	1.5	1.5	2.8	2.8	4.4	4.2						
음			ntu	lb-ft	1.1	1.1	2.0	2.0	3.3	3.1						
320 Vdc	Rated Speed		Nrdt	rpm	2500	6000	1900	3600	1400	2800						
32	Rated Power (speed)		Prtd	kW	0.37	0.97	0.55	1.0	0.65	1.3						
	nated i ower (speed)		TTU	hp	0.50	1.3	0.74	1.4	0.87	1.7						
	Rated Torque (speed)		Trtd	Nm							1.3	1.5	2.0	2.2	2.6	3.3
٥	nateu lorque (speeu)		ntu	lb-ft							1.0	1.1	1.5	1.6	2.0	2.4
640 Vdc	Rated Speed		Nrdt	rpm							3800	6200	1900	3600	7000	3200
6	Rated Power (speed)		Prtd	kW							0.51	0.97	0.41	0.82	1.9	1.1
	naleu rowei (speeu)		FILU	hp							0.68	1.3	0.55	1.1	2.6	1.5
	T. O. I.I.	100/	IZ.	Nm/Arms	1.31	0.49	1.67	0.85	2.15	1.08	1.62	0.49	3.32	1.70	0.87	1.86
	Torque Constant	±10%	Kt	lb-ft/Arms	0.97	0.36	1.23	0.62	1.59	0.79	1.19	0.36	2.45	1.25	0.64	1.37
	Back EMF Constant	±10%	Ke	Vrms/Krpm	79.5	29.4	101	51.2	130	65.1	97.9	29.4	201	103	52.5	112
	Resistance (line-line)	±10%	RM	ohm	17.7	2.3	9.5	2.5	8.8	2.3	35.4	2.3	49.2	12.5	1.9	8.5
	Inductance		L	mH	185	25	133	38	130	32	272	25	532	152	21	92
	Inertia (includes resolver feedback)		JM	kg-m2 lb-ft-sec2	9.97 7.35		1.73 1.28		2.51 1.85		9.97 7.35		1.73 1.28		2.51 1.85	
	Pole Pairs			12 11 000E	2			1.28E-04 2		2	7.35E-05 2		1.28E-04 2		1.85E-04 2	

W(H)20x Family Performance Data



Stainless Steel W(H)40x Series Motors


W(H)40x Family Dimensional Data

Shaft Mount Option	Units	Shaft Diameter	Shaft Length	Pilot Diameter	Mtg Hole B.C.	Mtg Hole	Keyway Width	"S" Keyway Length	"T" Shaft Diameter Over Keyway	Shaft Feature
AK	mm	24 ^{+0.009} -0.004	50 ± 0.5	110 ^{+0.013} -0.009	119.38	M8 X 1.25 THD	8 +0.00 -0.036	31.8	20 +0.00 -0.20	Keyway 8 x 8 x 30
AN	mm	24 ^{+0.009} -0.004	50 ± 0.5	110 ^{+0.013} -0.009	119.38	M8 X 1.25 THD	-	-	-	smooth

MODEL	Units	A MAX	"В"
W(H)406	mm	365.2	323.5
W(H)404	mm	311.9	270.2
W(H)402	mm	258.6	216.9

Note: Contact customer support for length of motor with brake.

W(H)40x Family Outline Drawings

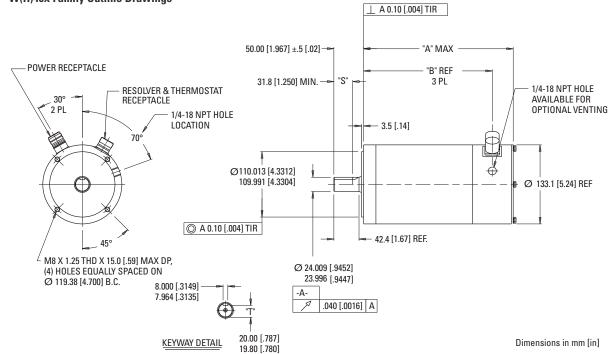



					W-	402	W-	404	W-	406	WH-402	WH-404		WH-406	
	Parameter	Tol	Symbol	Units	A	В	A	В	A	В	D	A	D	В	C
	Max Rated DC Bus Voltage	Max	Vbus	Vdc	32	20	32	20	32	20	640	64	10	64	40
	Continuous Torque (Stall) for	Nom	TCS	Nm	4.6	4.8	8.8	9.0	11.4	12.1	3.8	7.2	7.2	10.3	10.0
	ØT winding = 100°C			lb-ft	3.4	3.5	6.5	6.7	8.4	8.9	2.8	5.3	5.3	7.6	7.4
	Continuous Current (Stall) for ØT winding = 100°C	Nom	TCS	Arms	2.0	4.3	3.8	6.7	1.6	12.4	2.6	1.6	4.1	5.3	8.0
	Max Mechanical Speed	Nom	NMAX	rpm	1800	3600	1800	3000	2000	4000	5000	1650	4200	3800	6000
	Peak Torque	Nom	TP	Nm	19.9	19.8	35.9	36.7	48.5	49.2	19.8	35.9	37.5	49.5	48.2
				lb-ft	14.7	14.6	26.5	27.1	35.8	36.3	14.6	26.5	27.7	36.5	35.6
	Peak Current	Nom	IP	Arms	9.3	18.8	16.4	28.8	27.3	53.3	14.4	8.2	22.5	26.7	40.7
	Rated Torque (speed)		Trtd	Nm	4.2	4.6	8.8	8.6	10.6	10.6					
р р	hated lorque (speed)		intu	lb-ft	3.1	3.4	6.5	6.4	7.8	7.8					
320 Vdc	Rated Speed		Nrdt	rpm	1500	3000	1500	2500	1700	3200					
m	Rated Power (speed)		Prtd	kW	0.66	1.5	1.3	2.2	1.9	3.5					
			Titu	hp	0.88	1.9	1.8	3.0	2.5	4.7					
	Rated Torque (speed)		Trtd	Nm							2.8	6.0	5.6	8.1	7.3
음			intu	lb-ft							2.1	4.4	4.1	6.0	5.4
640 Vdc	Rated Speed		Nrdt	rpm							4600	1500	3700	3200	5000
ق	Rated Power (speed)		Prtd	kW							1.4	0.97	2.2	2.8	3.8
			TTU	hp							1.8	1.3	2.9	3.7	5.1
	Torque Constant	±10%	Kt	Nm/Arms	2.25	1.11	2.31	1.34	1.87	0.97	1.45	4.61	1.75	1.95	1.25
	lorque constant	1070	ixt	lb-ft/Arms	1.66	0.82	1.70	0.99	1.38	0.72	1.07	3.40	1.29	1.44	0.92
	Back EMF Constant	±10%	Ke	Vrms/Krpm	136	67	139	81	113	59	87	279	106	118	75
	Resistance (line-line)	±10%	RM	ohm	10.5	2.6	4.1	1.3	1.7	0.44	6.1	19.5	3.3	2.3	0.9
	Inductance		L	mH	220	50	102	34	42	12	89	408	60	48	19
	Inertia (includes resolver		JM	kg-m2	3.23	3E-4	6.56	6E-4	9.29	9E-4	3.23E-4	6.56	6E-4	9.29	9E-4
	feedback)		UIVI	lb-ft-sec2	2.38	3E-4	4.84	4E-4	6.85	5E-4	2.38E-4	4.84	1E-4	6.8	5E-4
	Pole Pairs				1	2	-	2	2	2	2	2	2	:	2

W(H)40x Family Performance Data







Stainless Steel W(H)60x Series Motors


W(H)60x Family Dimensional Data

Shaft Mount Option	Units	Shaft Diameter	Shaft Length	Pilot Diameter	Mtg Hole B.C.	Mtg Hole	Keyway Width	"S" Keyway Length	"T" Shaft Diameter Over Keyway	Shaft Feature
AK	mm	32 ^{+0.018} +0.002	50 ± 0.5	130 ^{+0.014} -0.011	145.4	M10 X 1.5 THD	10 ^{+0.00} -0.036	31.0	27 ^{+0.00} -0.20	Keyway 10 x 10 x 31
AN	mm	32 +0.018 +0.002	50 ± 0.5	130 ^{+0.014} -0.011	145.4	M10 X 1.5 THD	-	-	-	smooth

MODEL	Units	A MAX	"В"
W(H)606	mm	433.3	388.2
W(H)604	mm	364.7	319.6
W(H)602	mm	296.1	251.0

Note: Contact customer support for length of motor with brake.

W(H)60x Family Outline Drawings

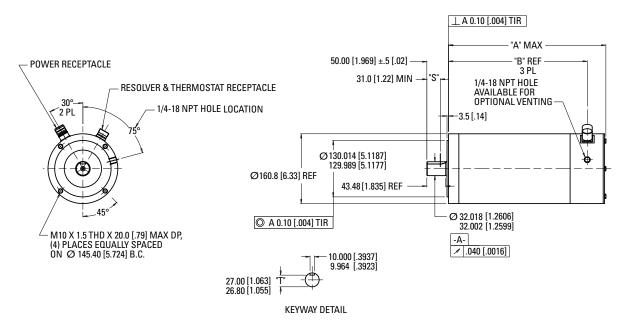

Dimensions in mm [in]



W(H)60x	Family	Perl	formance	Data
-----	------	--------	------	----------	------

					W-	602	W-	604	W-	606	WH	-602		WH-604	1	WH-606
	Parameter	Tol	Symbol	Units	A	B	A	В	A	В	A	В	A	C	J	A
	Max Rated DC Bus Voltage	Max	Vbus	Vdc	32	20	32	20	32	20	64	40		640		640
	Continuous Torque (Stall)	Nom	TCS	Nm	11.5	11.2	19.6	19.6	29.0	27.2	9.5	9.7	16.1	16.1	16.0	23.0
	for ØT winding = 100°C	NUIII	103	lb-ft	8.50	8.30	14.4	14.4	21.4	20.0	7.0	7.1	11.9	11.9	11.8	16.9
	Continuous Current (Stall) for ØT winding = 100°C	Nom	TCS	Arms	6.5	11.2	12.4	18.0	13.0	24.3	2.7	5.5	2.8	10.9	6.0	11.4
	Max Mechanical Speed	Nom	NMAX	rpm	2300	4500	2500	3650	1800	3500	2200	4500	1300	5000	2450	4000
	Peak Torque	Nom	TP	Nm	51.2	49.8	86.4	87.7	132	126	50.8	51.2	90.4	87.2	88.5	126
		NOIT		lb-ft	37.7	36.7	63.7	64.7	97.2	93.0	37.5	37.7	66.7	64.4	65.3	92.8
	Peak Current	Nom	IP	Arms	30.5	61.4	57.4	84.8	62.0	119	15.3	30.5	16.4	62.2	35.0	59.0
	Rated Torque (speed)		Trtd	Nm	10.2	8.9	17.2	17.6	26.2	21.7						
ы			nta	lb-ft	7.5	6.5	12.7	13.0	19.3	16.0						
320 Vdc	Rated Speed		Nrdt	rpm	2000	4000	2150	3150	1550	3050						
ຕາ	Rated Power (speed)		Prtd	kW	2.1	3.7	3.90	5.8	4.3	6.90						
				hp	2.9	5.0	5.2	7.8	5.7	9.3						
	Rated Torque (speed)		Trtd	Nm							7.7	6.8	13.3	9.8	11.5	16.1
g				lb-ft							5.6	5.0	9.8	7.2	8.5	12.0
640 Vdc	Rated Speed		Nrdt	rpm							2000	4000	1200	4500	2450	3300
9	Rated Power (speed)		Prtd	kW							1.6	2.8	1.6	4.6	3.0	5.6
				hp							2.1	3.8	2.2	6.2	4.0	7.5
	Torque Constant	±10%	Kt	Nm/Arms	1.77	0.85	1.58	1.09	2.24	1.12	3.51	1.77	5.80	1.48	2.66	2.02
				lb-ft/Arms	1.30	0.63	1.17	0.80	1.65	0.83	2.59	1.30	4.28	1.09	1.96	1.49
	Back EMF Constant	±10%	Ke	Vrms/Krpm	107	52	96	66	135	68	212	107	351	89.3	161	122
	Resistance (line-line)	±10%	RM	ohm	1.55	0.38	0.51	0.23	0.50	0.14	7.8	1.9	7.8	0.50	1.0	0.50
	Inductance		L	mH	32	9	13	6	16	3.8	128	32	168	12	36	14
	Inertia (includes resolver		JM	kg-m2	1.03		2.03		3.04		1.03			2.03E-03		3.04E-03
	feedback)		UNI	lb-ft-sec2	7.58	E-04	1.50	E-03	2.24	E-03	7.58	E-04		1.50E-03	3	2.24E-03
	Pole Pairs				1	3	3	3	3	3	ć	3		3		3






Stainless Steel W(H)80x Series Motors

W(H)80x Family Dimensional Data

Shaft Mount Option	Units	Shaft Diameter	Shaft Length	Pilot Diameter	Mtg Hole B.C.	Mtg Hole	Keyway Width	"S" Keyway Length	"T" Shaft Diameter Over Keyway	Shaft Feature
AK	mm	48 ^{+0.018} +0.002	82 ± 0.5	130 ^{+0.014} -0.011	165.00	M12 X 1.75 THD	14 +0.00 -0.043	54.0	42.50 ^{+0.00} -0.20	Keyway 14 x 14 x 54
AN	mm	48 ^{+.018} +.002	82 ± 0.5	130 ^{+0.014} -0.011	165.00	M12 X 1.75 THD	-	-	-	smooth

MODEL	Units	A MAX	"B"
WH808	mm	634.4	581.8
W(H)806	mm	544.9	492.3
W(H)804	mm	455.4	402.8
W(H)802	mm	365.9	313.3

Note: Contact customer support for length of motor with brake.

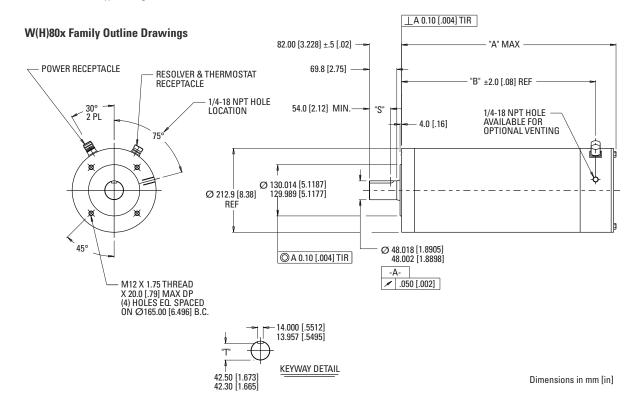

Sold & Serviced By: ELECTROMATE Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com

				W-802	W-	804	W-	806	WH	-802	WH	-804	WH	-806	WH-808
Parameter	Tol	Symbol	Units	A	A	B	A	В	A	D	A	В	A	C	В
Max Rated DC Bus Voltage	Max	Vbus	Vdc	320	32	20	32	20	64	10	64	10	64	10	640
Continuous Torque (Stall)	Nom	TCS	Nm	27.1	51.1	51.1	67.8	69.1	22.9	22.4	42.8	43.8	60.8	60.4	80.8
for ØT winding = 100°C	NUIII	100	lb-ft	20.0	37.7	37.7	50.0	51.0	16.9	16.5	31.6	32.3	44.9	44.5	59.6
Continuous Current (Stall) for \varnothing T winding = 100°C	Nom	TCS	Arms	16.0	22.7	31.0	30.7	58.0	4.7	11.7	25.1	13.0	14.2	25.8	34.4
Max Mechanical Speed	Nom	NMAX	rpm	2400	1800	2500	1800	3200	1600	4000	3500	2300	1800	4000	3000
Peak Torque	Nom	TP	Nm	130	232	230	323	327	123	117	232	231	323	322	390
Teak Torque	NUIII	11	lb-ft	96	171	170	238	241.0	90.7	85.9	171	170	238	238	288
Peak Current	Nom	IP	Arms	81.0	109	147	154	291	26.6	64.0	143	72.0	79.2	145	175
Rated Torque (speed)		Trtd	Nm	24.6	44.7	43.0	58.3	36.2							
nateu loique (speeu)		ntu	lb-ft	18.1	33.0	31.7	43.0	26.7							
Rated Speed		Nrdt	rpm	2000	1500	2000	1550	3000							
Rated Power (speed)		Prtd	kW	5.1	7.0	9.0	9.5	11.3							
Tated Tower (speed)		Titu	hp	6.9	9.4	12.1	12.7	15.2							
Rated Torque (speed)		Trtd	Nm						17.5	17.5	24.5	34.6	47.2	24.8	42.9
Tated forque (speed)		ntu	lb-ft						12.9	12.9	18.1	25.5	34.8	18.3	31.7
Rated Speed		Nrdt	rpm						1200	3000	3000	2000	1500	3000	3000
Rated Power (speed)		Prtd	kW						2.2	5.5	7.7	7.2	7.4	7.8	13.5
Hated Tower (Speed)		THU	hp						2.9	7.4	10.3	9.7	9.9	10.4	18.1
Torque Constant	±10%	Kt	Nm/Arms	1.69	2.25	1.65	2.21	1.18	4.87	1.92	1.71	3.37	4.29	2.34	2.35
lorque constant	1070		lb-ft/Arms	1.25	1.66	1.21	1.63	0.87	3.59	1.41	1.26	2.49	3.16	1.73	1.73
Back EMF Constant	±10%	Ke	Vrms/Krpm	102	136	100	134	71	294	116	103	204	260	142	142
Resistance (line-line)	±10%	RM	ohm	0.36	0.23	0.13	0.13	0.034	1.5	0.6	0.2	0.6	0.6	0.2	0.1
Inductance		L	mH	16	13	7	8	2.1	134	21	8	29	30	9	5
Inertia (includes resolver		JM	kg-m2	4.88E-3		DE-3		6E-2	4.88		8.4			6E-2	1.68E-2
feedback)			lb-ft-sec2	3.60E-3	6.20	DE-3	9.30	DE-3	3.60)E-3	6.20	DE-3	9.30)E-3	1.24E-2
Pole Pairs				3		3	:	3	3	3	3	3	3	3	3

W(H)80x Family Performance Data



TABLE OF CONTENTS

Connector Options

"B" - Motor Mounted Connectors Option

RESOLVER & THERMOSTAT RECEPTACLE

– POWER RECEPTACLE


Resolver Connector Pin Out

Pin	Function	Color
1	S3 (SIN HI)	Yellow/Black
2	S1 (SIN LO)-	Yellow
3	S2 (COS HI)	Green/Black
4	S4 (COS LO)	Green
5	R2 (REF HI)	White/Black
6	R1 (REF LO)	White
7	N/C	
8	Thermostat	Violet
9	Thermostat	Violet/White

Power Connector Pin Out

Pin	Function	Color
1	Phase C	White
2	Case Ground	Green/Yellow
3	Phase A	Brown
4	Phase B	Red

"C" - Three-Meter Cables with Connectors Option

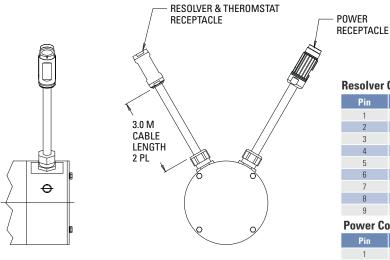

Note: Cables meet IP69 at the motor end and IP67 at the connector end.

Resolver Connector Pin Out

Pin	Function	Color
1	S3 (SIN HI)	Yellow/Black
2	S1 (SIN LO)-	Yellow
3	S2 (COS HI)	Green/Black
4	S4 (COS LO)	Green
5	R2 (REF HI)	White/Black
6	R1 (REF LO)	White
7	N/C	
8	Thermostat	Violet
9	Thermostat	Violet/White


Power Connector Pin Out

Pin	Function	Color
1	Phase C	White
2	Case Ground	Green/Yellow
3	Phase A	Brown
4	Phase B	Red



Connector Options

"L3 or L6" - Tubing Covered Flying Leads

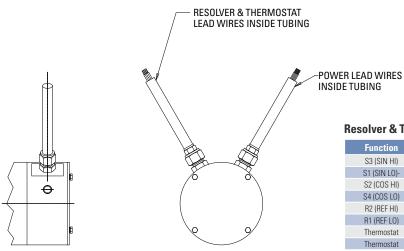

Resolver & Thermostat Leads

Function	Wire Color
S3 (SIN HI)	Black
S1 (SIN LO)-	Red
S2 (COS HI)	Yellow
S4 (COS LO)	Blue
R2 (REF HI)	Yellow/White
R1 (REF LO)	Red/White
Thermostat	Yellow
Thermostat	Yellow

Power Leads

Function	Wire Color
Phase C	White
Case Ground	Green/Yellow
Phase A	Brown
Phase B	Red

CONNECTOR OPTIONS


Sold & Serviced By: ELECTROMATE Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com sales@electromate.com

▶ TABLE OF CONTENTS ▶ W(H)10X MOTOR ▶ W(H)20X MOTOR ▶ W(H)40X MOTOR

/(H)40X MOTOR | > W(H)60X MOTOR

Model Nomenclature

Stainless Steel Washdown Motor Series

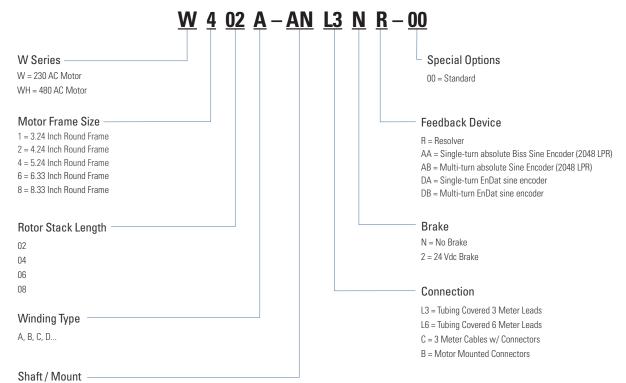

AK = Standard Mount, Open Keyway AN = Standard Mount, Smooth Shaft

The Stainless Steel Washdown Series is one family of many motors offered by Kollmorgen. If you seek higher-performance, greater torque in a smaller package, or options not listed above, contact Kollmorgen to discuss the AKM and Goldline servo motor families.



AquaTRUE Gearhead IP66/IP67 and IP69

The perfect gearhead to mate to the Stainless Steel W Series...

Micron's new AquaTRUE gearhead combines the high performance and torque capacity of Micron's True Planetary gearheads with features specifically designed to meet the strict requirements of applications such as food and beverage handling, packaging and dispensing. The AquaTRUE's IP66/IP67 and IP69K protection is able to handle caustic cleaning chemicals as well as high pressure washdown. Until now, manufacturers have been unable to use gearheads in many applications involving harsh environments because there was not a product available that met those needs. The AquaTRUE is engineered to be placed anywhere in the application's design, regardless of environmental factors. This eliminates the cost of additional components such as enclosers, shielding or mechanical transmissions. The gearhead's 304 stainless steel housing eliminates the concern for rust or any type of corrosion. The AquaTRUE has a laser etched permanent product label and a smooth, round external housing that is designed without any external seams or corners for bacteria to collect. This makes the AquaTRUE very easy to clean and a perfect fit in any washdown environment.

- Frame Sizes: 60mm, 80mm, 120mm, 160mm
- Precision: 13 arc-min max
- Torque Capacity: up to 876 Nm
- Ratio Availability: 3:1 to 10:1 (single stage)

Features and Benefits

- Round Housing
- No External Seams
- 300 Series Stainless Steel
- IP66/IP67 and IP69K Protection on both the input and output
- NSF/ANSI 169 Certification

- No corners or areas for bacteria to collect
- No areas of ingress
- Corrosion Resistance
- Can handle high pressure washdown

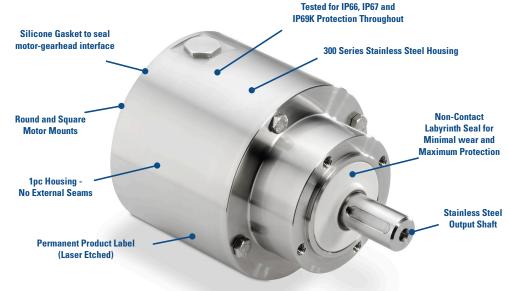




TABLE OF CONTENTS

Kollmorgen Offers Solutions for Food, Beverage and Pharmaceutical Industries

The Perfect Mix of Performance and Hygiene for Any Industry or Washdown Application.

Kollmorgen's family of high torque density servomotors provides the widest range of features and options in the industry. Our robust selection allows you to select exactly the right motor for your application, without having to over spec and over pay.

Industry regulations place numerous and often stringent demands on system manufacturers. However, depending on your application, the specific requirements for your motion components can range from simple to complex.

It costs too much money to put an over specified motor in a washdown application. And it takes up too much time and effort to modify a housing for a hygienic application. Why pay for this approach or any other motor that doesn't perform the way you need it to. With Kollmorgen's diverse selection, you don't have to settle for just any motor. You can select the exact motor for your application and get the job done right, achieving optimal results.

Whether you're looking to put you motor near a wet area or plan to expose it to high pressure washdown, the Kollmorgen family of servomotors provides a right fit for your specific application. You can select from the robust line-up of AKM[™], including the exclusive AKM[™] Washdown, AKM[™] Food Grade models and Stainless Steel W series - all with a proven track record for dependability, superior functionality and high-performance.

- Industry-leading performance
- Certifications ranging from basic IP65 up to IP69K and FDA
- Thousands of model options, STANDARD!
- · Severe washdown options
- All stainless options (up to 300 and 17-4PH grade)
- Mounts seamlessly with Micron® AquaTrue™ wash-down planetary gearbox



All Stainless, Round



Washdown & Food Versions Available



ŝ

Kollmorgen Has The Solution To Meet Your Specific **Application Needs**

Specifications and Options	АКМ	AKM Washdown	AKM Food	Stainless Steel W	Stainless Steel S
Stainless Steel Housing				Х	Х
Stainless Steel Shaft	Х	Х	Х	Х	Х
Food Grade Epoxy Paint			Х		
Needle Printed Nameplate		Х	Х		
Laser Etched Nameplate				Х	Х
Coated Laminations				Х	Х
Pressure Compensation Diaphragm					Х
Food Grade Bearing Grease			Х	Х	
Oil Filled					Х
Round Housing				Х	Х
Ingress Protection (IP)	IP65	IP67	IP67	IP69K	Submersible To Depths Of 20,000 Ft
Agency Approvals	UL,CE	UL, CE, FDA	UL, CE, FDA		
Continuous Stall Torque (Nm)	.19-140	.48-24.5	.48-24.5	1-80	1-80
Feedback Types	Multiple	Multiple	Multiple	Multiple	Multiple
Optional Holding Brake	Х	Х	Х	Х	Х
Relative Price	\$	\$\$	\$\$	\$\$\$	\$\$\$\$



CO-ENGINEERED SOLUTIONS AVAILABLE

