

www.electromate.com sales@electromate.com

610 Series Positioning Tables

Introduction	F-2
Ordering Guide	F-4
Specifications	F-5
Dimensions	F-6
Mounting Brackets	
Thrust Capacity (axial load)	F-11
Screw Travel Life	F-12
Screw Options	F-13
Linear Bearing Load Capacity	F-18
EOT & Home Switches	F-19
Motor Couplings	F- 22
Motor Mount Options	F-24
Power-off Electric Brakes	F-26
Rotary Encoders	F-27



Toll Free Phone (877) SERV098 Toll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com

Single or Multiple Axis

LINTECH's 610 series positioning tables offer precision performance and design flexibility for use in a wide variety of Motion Control applications.

- Welding
- Test Stands
- GluingPick & Place
- Part Insertion
- Laser Positioning
- Liquid Dispensing
- Part ScanningInspection Stations
- General Automation
- Semiconductor Processing

Quality Construction

LINTECH's 610 series tables are designed to maximize performance while minimizing physical size and cost. These tables use a low friction, preloaded, recirculating linear ball bearing system, which rides on precision ground profile linear rails. The linear rails are mounted to an aluminum base, which offers a rigid support over the entire travel of the table's carriage. The load is mounted to a precision machined aluminum carriage. The 610 series uses threaded stainless steel inserts in carriage plate for customer mounting of load. There are 38 different acme & ball screw options, that offer high efficiencies and long life at an economical price. These tables are designed to allow for numerous options. They include motor mounts, couplings, EOT & Home switches, rotary encoders, power-off electric brakes, motor wrap packages and can be configured for multiple axis applications.

Available Options

Acme Screws & Ball Screws

An assortment of acme screws and ball screws can be installed in the 610 series tables, providing solutions to load back driving, high duty cycle, high speed, extreme smoothness, and sensitive positioning applications.

Carriage Adapter Plates & Cartesian Brackets

Optional carriage adapter plates and vertical angle brackets can be mounted directly to the top of various LINTECH positioning tables, thus providing for easy multiple axis configurations.

IP30 Rated Enclosed Positioning Slide

For harsh environmental conditions, and for operator protection, these tables are fitted with aluminum covers with a belt which covers the gaps on the top where the bearing carriage rides. This provides protection for all internal components.

End of Travel and Home Switches

The 610 series tables can be provided with end of travel (EOT) and home switches mounted and wired on either side of the table. Most position controllers can utilize the EOT switches to stop carriage motion when the extreme table travel has been reached in either direction. The home switch provides a known reference location on the table.

Rotary Encoders

Incremental encoders can be mounted to the table in order to provide positional data back to either a motion controller, or a digital display. Contact factory if linear encoder is required.

Motor Adapter Brackets

NEMA 23, NEMA 34, or any metric mount motor can be mounted to a 610 series positioning table with the use of adapters for interface.

Turcite Nut With Rolled Ball Screw

This solid polymer nut has no rolling elements in it, and performs very similar to an acme nut. It can provide smoother motion & less audible noise than most ball nuts, and is ideal for corrosive & vertical applications.

Other

The 610 series tables can be provided with **chrome plated linear bearings, rails, & screws** for corrosive environment applications, **power-off electric brakes** for load locking applications, **motor wrap packages** for space limited applications, and a **hand crank** for manually operated applications.



Introduction



610 Series

Standard Features - 610 Series

- Compact 5.91 inches (150 mm) wide by 2.95 inches (75 mm) tall
- Travel lengths from 6 inches (150 mm) to 60 inches (1520 mm)
- Threaded stainless steel inserts in carriage for load mounting
- O° F to +185° F (-18° C to +85° C) operating temperature
- 2 rails; 2 or 4 self lube bearings; 6 inch long carriage
- Precision ground profile linear rail design
- Recirculating linear ball bearing system
- IP30 rated enclosed positioning slide



Options - 610 Series

- Chrome plated linear bearings, rails and screws
- End of travel (EOT) and home switches wired
- CAD drawings available via our Website
- Adapter brackets for non-NEMA motors
- NEMA 23 & 34 motor wrap packages
- Rotary incremental encoders
- NEMA 34 adapter bracket
- Power-off electric brakes
- Turcite nut option
- Motor Couplings
- Ball screws:

Rolled - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.200 inch lead 0.625 inch diameter, 1.000 inch lead 0.750 inch diameter, 0.200 inch lead 0.750 inch diameter, 0.500 inch lead

Precision - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.200 inch lead 16 mm diameter, 5 mm lead 16 mm diameter, 10 mm lead 16 mm diameter, 16 mm lead 0.750 inch diameter, 0.200 inch lead 20 mm diameter, 5 mm lead 20 mm diameter, 20 mm lead

Ground - Preloaded Nuts Only:

0.625 inch diameter, 0.200 inch lead 0.625 inch diameter, 0.500 inch lead

Acme screws:

Rolled - Non-preloaded & Preloaded Nuts:

0.625 inch diameter, 0.100 inch lead 0.625 inch diameter, 0.200 inch lead

Ordering Guide

Screw Drive - 6 inch Carriage



				3	ales@electromate.com	
614	6 06 - NE - TBO	_ _ BC0	1 - <u>S005</u>	- M02 - C	155 L01 R	– <u>E00</u> – [
able Series						
2 - 2 bearing carriage4 - 4 bearing carriage						
Carriage Length						
Fravel Length (see pages F-6 to 06 - 6 to 60 inches	> F-7)					
Screw Style						
NE - no screw extension	SE - screw extension					
Tapped Mounting holes in I						
TB0 - No holes TB1 - Eng		IOIES				
Linear Bearing Type (See pag BC0 - No Ball Chain	ge F-11) BC1 - With Ball Chain					
Carriage Inserts (see page F-7) 1 - English mount 2 -	 Metric mount 					
Screw Options (see pages F-12						
Rolled ball screws	Rolled ball screws	Precision b	all screws			
S005 - .625 x .200 NPL	S017 - .750 x .500 NPL		5 x .200 NPL	_		
S006 - .625 x .200 PL	S018 - .750 x .500 PL		5 x .200 PL			
S007 - .625 x .200 NPL(T)	S019 - .750 x .500 NPL	(T) S116 - 16	x 5 NPL			
S008 - .625 x .200 PL(T)	S020 - .750 x .500 PL(⁻	T) S117 - 16	x 5 PL			
S009 - .625 x 1.000 NPL	Ground ball screws		x 10 NPL			
S010 - .625 x 1.000 PL	\$212 - 625 x 200 PI	S119 - 16				
S011 - .625 x 1.000 NPL(T)	S213 - .625 x .500 PL		x 16 NPL			
S012 - .625 x 1.000 PL(T) S013 - .750 x .200 NPL	S214 - 16 x 5 PL	S121 - 16	x 10 FL) x .200 NPL			
S014 - .750 x .200 PL	S215 - 16 x 16 PL) x .200 PL	-		
S015 - .750 x .200 NPL(T)	Rolled acme screws		x 5 NPL			
S016 - .750 x .200 PL(T)	S300 - .625 x .100 NPL	0.00				
	S301 - .625 x .100 PL		x 20 NPL			
S999 - other	S302 - .625 x .200 NPL	S129 - 20	x 20 PL			
	S303 - .625 x .200 PL					
Notor Mount (see pages F-24 to) F-25)					
M00 - none	M02 - NEMA 23 mount (,	NEMA 23 (RH	, 1		
M01 - hand crank	M03 - NEMA 23 mount (I		NEMA 23 (LH)			
M16 to M98 - see Website M99 - other	M04 - NEMA 34 mount (M05 - NEMA 34 mount (,	NEMA 34 (RH NEMA 34 (LH)			
	,	,) widp		
Coupling Options (see pages F C000 - none C025 to		to C136 - H100	C407	to C415 - G100		
		to C184 - H131		to C464 - G126		
		to C199 - H163		to C480 - G158		
imit & Home Switches (see	pages F-19 to F-21 for locationr	and sepcifcation)				
L00 - no switches	Mechanical	Reed	Hall	Prox (NPN)	Prox (PNP)	
	home switches L01R or L	L04R or L	L07R or L	L10R or L	L13R or L	
EOT	T switches only LO2R or L	L05R or L	L08R or L	L11R or L	L14R or L	
hor	me switch only LO3R or L	L06R or L	L09R or L	L12R or L	L15R or L	
incoder Options - SE OPTI	ION ONLY (see page F-27)					
E00 - none E01 - rotary (50	00 lines/rev) E02 - rotary	(1000 lines/rev)	E03 - rotary	(1270 lines/rev)	E99 - other (I	inear or rotary)
Power-off Brakes - SE OPT	ION ONLY (see page F-26)					
B00 - none B01 - 24	VDC B02 - 90 VDC	B99 - ot	her			



Screw Drive - 6 inch Carriager 2017 SERV098

C ELECTROMATE



Specifications

Load Ca	pacities	Two	(2) Bea	aring	Carri	age	Four	[.] (4) Bea	ring	Carri	age
Dynamic Horizontal	2 million inches (50 km) of travel	3,890	lbs	(1765	kgf)	7,780	lbs	(3530	kgf)
Dynamic Horizontal	100 million inches (1270 km) of travel	1,045	lbs	(474	kgf)	2,090	lbs	(948	kgf)
Static Horizontal		5,820	lbs	(2640	kgf)	11,640	lbs	(5280	kgf)
Dynamic Roll Moment	2 million inches (50 km) of travel	460	ft-lbs	(624	N-m)	920	ft-lbs	(1247	N-m)
Dynamic Roll Moment	100 million inches (1270 km) of travel	124	ft-lbs	(168	N-m)	247	ft-lbs	(335	N-m)
Static Roll Moment		840	ft-lbs	(1139	N-m)	1,680	ft-lbs	(2277	N-m)
Dyn. Pitch & Yaw Moment	2 million inches (50 km) of travel	71	ft-lbs	(96	N-m)	980	ft-lbs	(1,328	N-m)
Dyn. Pitch & Yaw Moment	100 million inches (1270 km) of travel	19	ft-lbs	(26	N-m)	263	ft-lbs	(356	N-m)
Static Pitch & Yaw Moment		126	ft-lbs	(170	N-m)	1,770	ft-lbs	(2400	N-m)
Each Bearing Dyn. Capacity	2 million inches (50 km) of travel	1,945	lbs	(882	kgf)	1,945	lbs	(882	kgf)
Each Bearing Dyn. Capacity	100 million inches (1270 km) of travel	525	lbs	(238	kgf)	525	lbs	(238	kgf)
Each Bearing Static Load Ca	apacity	2,910	lbs	(1320	kgf)	2,910	lbs	(1320	kgf)
Thrust Force Capacity	10 million screw revolutions	895	lbs	(406	kgf)	895	lbs	(406	kgf)
Thrust Force Capacity	500 million screw revolutions	240	lbs	(109	kgf)	240	lbs	(109	kgf)
Maximum Acceleration		386	in/sec ²	(9,8 m	/sec²)	772	in/sec ²	(1	9,6 m	/sec²)
d ₁ Center to center distance (spre	ad) between the two rails	3.	228 in	(8	1,99	mm)	3.	228 in	(8	1,99	mm)
d ₂ Center to center distance (space			-			3.	476 in	(8	8,29	mm)	
d _r Distance from the bearing center	er to top of carriage plate surface	1.	299 in	(3	2,99	mm)	1.	299 in	(3	2,99	mm)

Other	For Two (2) & Four (4) Bearing Carriages							
Table Material	Base, Carriage, End Plates & Cover Plate Option - 6061 anodized aluminum							
Linear Rail Material	Case Hardened Steel							
Screw Material (see pages F-13 to F16)	Acme Screw - Stainless Steel							
Screw Material (see pages F-13 to F16)	Rolled Ball, Precision Ball, & Ground Ball - Case Hardened Steel							
Unidirectional Repeatability	+/- 0.0002 in (5 microns)							
Bidirectional Repeatability	+/- 0.0002 in (5 microns) to +/- 0.0082 in (208 microns) - depends on selected screw							
Straightness	< 0.00016 in/in (< 4,06 microns/25mm)							
Flatness	< 0.00016 in/in (< 4,06 microns/25mm)							
Orthogonality (multi-axis systems)	< 30 arc-seconds							
Friction Coefficient	< 0.01							
Motor Mount	NEMA 23 & 34 Mounts, Metric Mounts, Motor Wraps, and Hand Crank Option							
Coupling	Three (3) different styles available							
Belt Cover Strip Material	Black - Polyurethane							

C ELECTROMATE

Dimensions & Specifications

Model Number	Travel Length inches	inc	mensions hes m)		Mounting D inch (mr		Screw Length inches	Table ⁽²⁾ Weight Ibs		
	(mm)	A	В	С	D	E	M ⁽¹⁾	Ν	(mm)	(kgf)
614606-NE	6 (150)	12.125 (308,0)	17.800 (452,1)	10.125 (257.18)	8.125 (206,38)	3	8	8	13.40 (340)	17.8 (8,1)
614612-NE	12 (300)	18.125 (460,4)	23.800 (604,5)	16.125 (409,58)	14.125 (358,78)	5	8	12	19.40 (493)	23.0 (10,5)
614618-NE	18 (455)	24.125 (612,8)	29.800 (756,9)	22.125 (561,98)	20.125 (511,18)	7	8	16	25.40 (645)	28.2 (12,8)
614624-NE	24 (605)	30.125 (765,2)	35.800 (909,3)	28.125 (714,38)	12.563 (319,10)	9	12	20	31.40 (798)	33.5 (15,2)
614630-NE	30 (760)	36.125 (917,6)	41.800 (1061,7)	34.125 (866,78)	15.563 (395,30)	11	12	24	37.40 (950)	38.8 (17,6)
614636-NE	36 (910)	42.125 (1070,0)	47.800 (1214,1)	40.125 (1019,18)	18.563 (471,50)	13	12	28	43.40 (1102)	44.1 (20,0)
614642-NE	42 (1060)	48.125 (1222,4)	53.800 (1366,5)	46.125 (1171,58)	21.563 (547,70)	15	12	32	49.40 (1255)	49.3 (22,4)
614648-NE	48 (1215)	54.125 (1374,8)	59.800 (1518,9)	52.125 (1323.98)	16.042 (407,47)	17	16	36	55.40 (1407)	54.6 (24,8)
614654-NE	54 (1370)	60.125 (1527,1)	65.800 (1671,3)	58.125 (1476,38)	18.042 (458,27)	19	16	40	61.4 (1560)	59.9 (27.2)
614660-NE	60 (1520)	66.125 (1679,6)	71.800 (1823,7)	64.125 (1628,78)	20.042 (509,07)	21	16	44	67.4 (1712)	65.2 (29,6)

x = 4; Carriage has 4 bearings; Carriage weight = 3.0 lbs (1,36 kg)

Footnotes:

(1) Mounting holes are total number. These holes are used for vertically mounting using 212790 "L" bracket. See page F-9 for details on bracket.


(2) Weight shown is with a 0.625 inch (16 mm) diameter screw, a NEMA 23 motor mount [0.42 lbs (0,19 kg)], a C100 style [0.09 lbs (0,04 kg)] coupling, and a 2 bearing carriage. When using a 0.750 inch (20 mm) diameter screw add 0.042 lbs per inch (0,00075 kg per mm) of screw length for a given model number.

Screw Drive - 6 inch Carriage (877) SERV098

C ELECTROMATE

610 Series

Dimensions - NE and SE

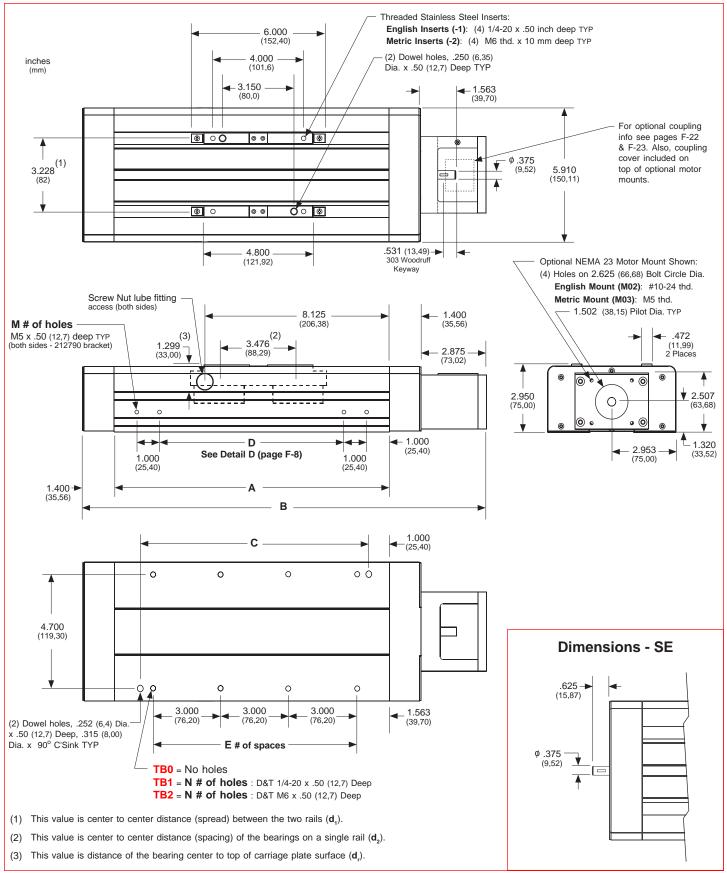


Note: Any 610 series can be mounted on top of a second 610 series table, in order to create X-Y multiple axis configurations. See page F-10 for optional 213320 carriage adapter plate information.

- Screw Drive -

Contract Con

Dimensions - Detail D

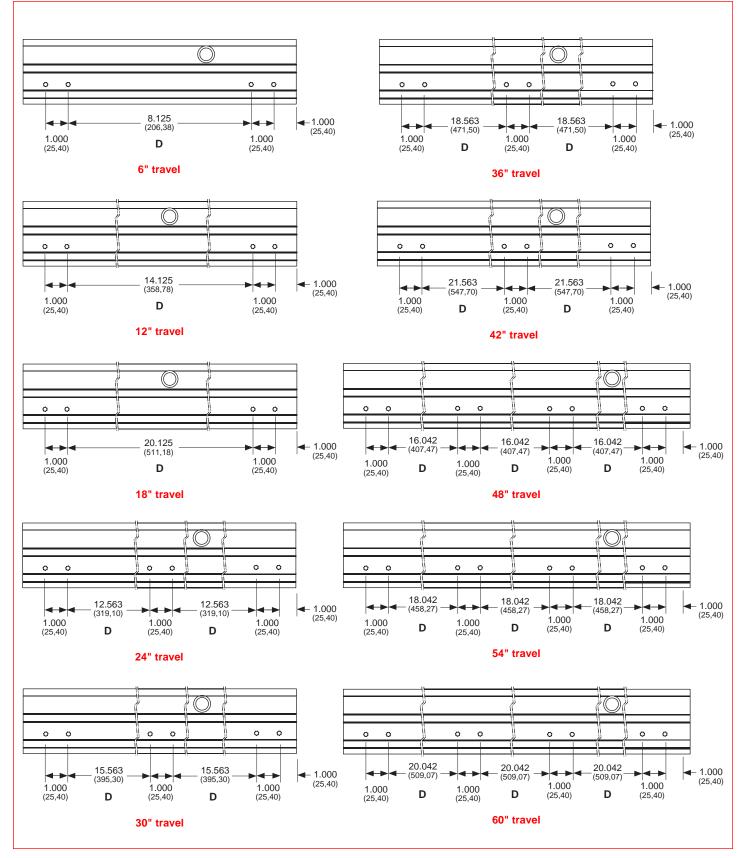


- Screw Drive -

Coll Free Phone (877) SERV098 Toll Free Fax (877) SERV099 www.electromate.com




Mounting Brackets


Mounting brackets (or tapped base holes see page F-7) are required in order to install the 610 onto a horizontal or vertical surface. Two bracket styles allow for ease of installation. The horizontal bracket uses the 610 extrusion slot on both sides to rigidly hold the unit. The vertical bracket uses drilled & tapped holes on the extrusion body on both sides. This provides a fixed and safer means of holding the unit when installed vertically.

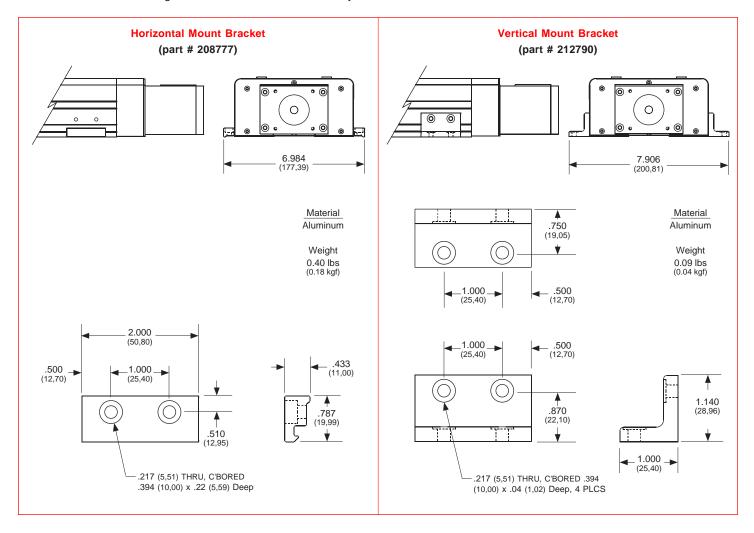

Moment of Inertia Values

The "moment of inertia" of an object is a gauge of the strength of that object to resist deflecting when used in an application or orientation where deflection might occur. The higher an I value relates to a lower amount of deflection.






- Screw Drive -




X-Y Bracket

Mounting bracket is required in order to install the 610 onto a horizontal or vertical surface in a "stacked" X-Y configuration. This X-Y adapter plate is used to mount a 610 unit onto a second 610 unit in a configuration.

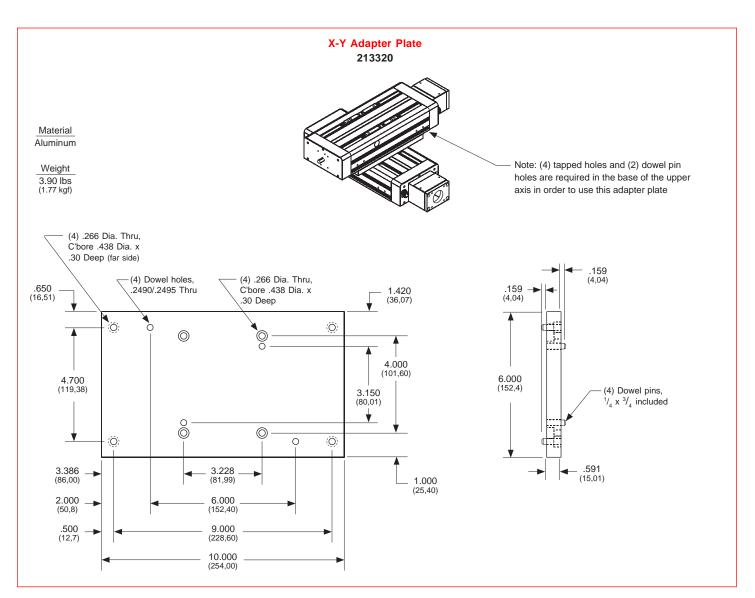

Screw Nut Lubrication Access

Screw nut lube access is provided on both sides of the base. Lubrication can be input into any of the optional screw nuts via an Alemite 1885 fitting inserted into the carriage. This fitting is accessible on each side by removing the round black extrusion cover on the side of the 610 base. The location is dimensioned on page F-7. Only one side insertion is required.

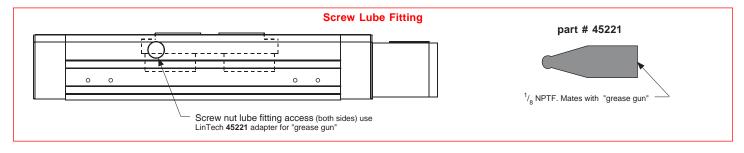



- Screw Drive -

Ball Chain Option for Bearings (-BC1)

The 610 series utilizes self lube profile rail linear bearings with re-circulating steel balls. The ball chain option captures each steel ball preventing any contact from one ball to another, as the balls re-circulate. This allows for increased linear velocity, acceleration, and provides for longer life as well. In addition, this feature will reduce the "audible noise" for the re-circulating balls, and increase the smoothness of motion.

Thrust Capacity (axial load)

The life of the screw end support bearings can be estimated by evaluating the applied axial (thrust) load. The applied load "as seen by the bearings" depends upon the table orientation. Typically, the extra force acting upon the bearings during the acceleration interval is offset by a reduction in force during the deceleration interval. Therefore, evaluating the life of the bearings at a constant speed is adequate. The life of the screw end support bearings may not be the limiting element for a given application. See page for load/life capacity of acme and ball screw nuts.


Horizontal Application	Vertical Application
$\mathbf{F} = (\mathbf{W} \times \mathbf{v}) + \mathbf{E}$	F = W + E

$$L = \left[\frac{R}{F \times S}\right]^3 \times B$$

Construction of the second sec

- **B** = 2 (for millions of revolutions)
- E = externally applied extra forces
- **F** = applied axial load (as seen by the bearings)
- L = calculated life (millions of revolutions)
- R = dynamic load capacity of bearings at 2 million screw revolutions (see below)
- S = safety factor (1 to 8)
- W = user mounted load weight to carriage
 - = coefficient of friction for linear bearing system (0.01)

Screv End Sup		Number of Screw Revolutions millions of screw revolutions										
End Sup	ports	Static	1	2	10 50		100	500				
Thrust Capacity			1,725 (782)	1,530 (694)	895 (406)	525 (238)	415 (188)	240 (109)				

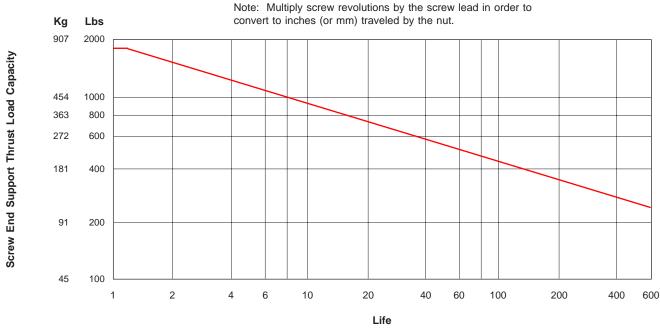

millions of screw revolutions

610 Series



Screw Travel Life

В

F

L

R


The life of an acme or ball screw can be estimated by evaluating the load applied to the nut. The applied load "as seen by the screw nut" depends upon the table orientation. Typically, the extra force acting upon the screw nut during the acceleration interval is offset by a reduction in force during the deceleration interval. Therefore, evaluating the life of the screw nut at a constant speed is adequate. The life of the screw nut may not be the limiting element for a given application. See page for load/life capacity of the screw end support bearings.

Но	Horizontal Application											
F	=	(W	х	μ)	+	Е					

Ver

 $L = \left[\frac{R}{F \times S} \right]^{3} \times B$

- either 1 (for millions of inches) or 25 (for Km) =
- Е externally applied extra forces =
 - = applied axial load (as seen by screw nut)
 - calculated travel life (millions of inches or Km) =
 - = rated dynamic load capacity of screw nut at 1 million inches of travel or 25 Km (see pages)
- S = safety factor (1 to 8)
- w user mounted load weight to carriage =
 - coefficient of friction for linear bearing system (0.01) =

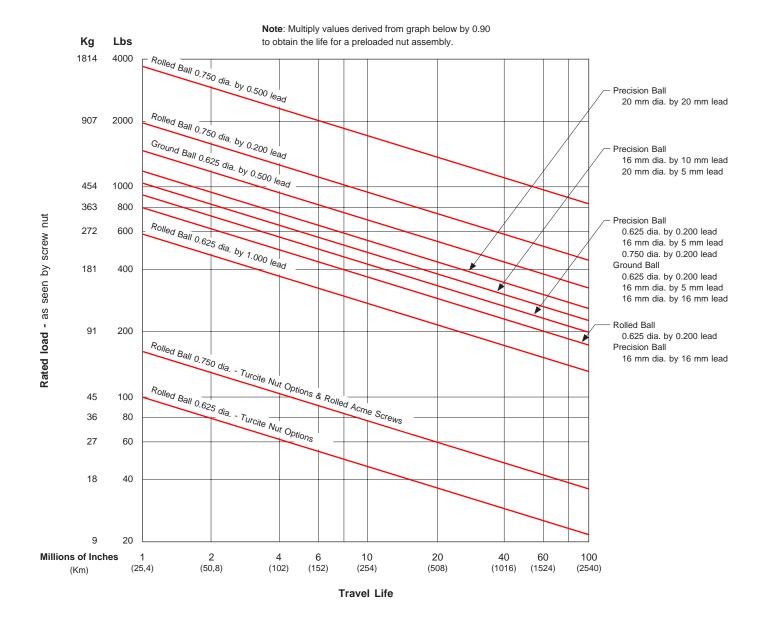





Screws - Acme & Ball

Acme screws use a turcite (polymer), or bronze nut. The nut threads ride in the matching acme screw threads, much like the ordinary nut and bolt system. This produces a higher friction (lower efficiency) system than a ball screw assembly, since there are no rolling elements between the nut and the acme screw threads. For applications requiring low speeds, noise and duty cycles, an acme screw works fine. Also, an acme screw is a good choice for most vertical applications, as it typically prevents back driving of the attached load.

Ball screws are the screw of choice for high duty cycle, high speed, and long life applications. The 610 series tables can be fitted with an assortment of ball screws. The ball screw nut uses one or more circuits of recirculating steel balls which roll between the nut and ball screw grooves, providing an efficient low friction system. Using a higher lead ball screw (for example a 0.500 inch lead instead of a 0.200 inch lead) will offer greater carriage speed for applications requiring rapid traverse, or fast, short incremental moves. Low wear and long life are key features of a ball screw system.

LINTECH provides three different ball screw configurations. The rolled ball screw system utilizes a tapped nut with a standard accuracy grade rolled screw. The precision ball screw system utilizes a ground nut with a higher accuracy grade rolled screw. The ground ball screw system utilizes a ground nut with a high accuracy precision ground screw.

Some screws are available with preloaded nuts. The preloaded nut assembly offers high *bidirectional* repeatability by eliminating backlash.

Consideration	Acme Screw		Ball Screws		Comments
Consideration	Acine Ociew	Rolled	Precision	Ground	
Audible noise	least audible noise	most audible noise	less audible noise than rolled screw	less audible noise than precision screw	Acme : no rolling elements provide for quiet operation. Ball : recirculating balls in nut assembly transmit audible noise during motion; due to more accurate machining procedures - precision & ground ball screws are quieter than rolled ball screws.
Back Driving Loads	may prevent back driving	can easily back drive a load	can easily back drive a load	can easily back drive a load	Acme : good for light loads & vertical applications. Ball : recirculating balls in nut assembly produce a low friction system; vertical applications may require a brake to hold the load when no power is applied to the motor.
Backlash non-preloaded nut	will increase with wear	constant	constant	constant	<i>Acme</i> : preloaded nut assembly eliminates backlash. <i>Ball</i> : preloaded nut assembly eliminates backlash.
Duty Cycle	low to medium (< 50 %)	high (100 %)	high (100 %)	high (100 %)	<i>Acme</i> : low duty cycle due to high sliding friction. <i>Ball</i> : high duty cycle due to recirculating balls in nut assembly; high efficiency & low friction system.
Life	shorter due to higher friction	long	long	long	Acme : mechanical wear related to duty cycle, load & speed. Ball : minimal wear if operated in proper environment, within load specifications, and periodically lubricated.
Relative - Cost	slightly more than rolled ball	least expensive	slightly more than rolled ball	most expensive	Acme : a little more expensive than the rolled ball screw. Ball : due to more accurate manufacturing procedures precision rolled & ground ball screws are more expensive.
Screw Efficiency	low 40 % -Acme 60 % -Turcite	high (90 %)	high (90 %)	high (90 %)	Acme : low efficiency due to high sliding friction. Ball : high efficiency due to recirculating balls in nut assembly - low friction system.
Smoothness	can be smooth	least smooth	medium smoothness	smoothest	<i>Acme</i> : due to friction can start/stop at very low speeds. <i>Ball</i> : smoothness is constant through a wide speed range; due to more accurate manufacturing procedures precision rolled & ground ball screws are smoother than rolled ball screws.
Speeds	low	high	high	high	Acme : high friction can causes excess heat & wear at high speeds. Ball : recirculating balls in nut provide for a high speed system due to low friction & high efficiency.



Screws - Acme & Ball

			Maximum Safe Table Operating Speed ⁽¹⁾													
			in/sec (mm/sec)													
Model	Travel	Screw														
Number	Length in (mm)	0.625 dia. 0.100 lead	0.625 dia. 0.200 lead	0.625 dia. 0.500 lead	0.625 dia. 1.000 lead	16 mm dia. 5 mm lead	16 mm dia. 10 mm lead	16 mm dia. 16 mm lead	0.750 dia. 0.200 lead	0.750 dia. 0.500 lead	20 mm dia. 5 mm lead	20 mm dia. 20 mm lead				
61x606	6 (150)	5.0 (127)	10.0 (254)	25.0 (635)	50.0 (1270)	9.8 (249)	19.7 (500)	31.5 (800)	10.0 (254)	25.0 (635)	9.8 (249)	39.3 (998)				
61x612	12 (300)	5.0 (127)	10.0 (254)	25.0 (635)	50.0 (1270)	9.8 (249)	19.7 (500)	31.5 (800)	10.0 (254)	25.0 (635)	9.8 (249)	39.3 (998)				
61x618	18 (455)	5.0 (127)	10.0 (254)	25.0 (635)	50.0 (1270)	9.8 (249)	19.7 (500)	31.5 (800)	10.0 (254)	25.0 (635)	9.8 (249)	39.3 (998)				
61x624	24 (605)	5.0 (127)	10.0 (254)	25.0 (635)	50.0 (1270)	9.8 (249)	19.7 (500)	31.5 (800)	10.0 (254)	25.0 (635)	9.8 (249)	39.3 (998)				
61x630	30 (760)	4.6 (117)	9.3 (236)	24.0 (609)	47.7 (1211)	9.5 (241)	18.8 (447)	30.4 (772)	10.0 (254)	25.0 (635)	9.8 (249)	39.3 (998)				
61x636	36 (910)	3.4 (86)	6.9 (175)	17.8 (452)	35.4 (899)	7.0 (177)	13.9 (353)	22.5 (571)	8.8 (223)	21.6 (548)	8.9 (226)	35.9 (912)				
61x642	42 (1060)	2.6 (66)	5.3 (134)	13.7 (348)	27.3 (693)	5.4 (137)	10.7 (272)	17.4 (441)	6.7 (170)	16.6 (421)	6.9 (175)	27.7 (703)				
61x648	48 (1215)	2.1 (53)	4.2 (106)	10.9 (276)	21.7 (551)	4.3 (109)	8.5 (216)	13.8 (350)	5.3 (134)	13.2 (335)	5.4 (137)	22.0 (558)				
61x654	54 (1370)	1.7 (43)	3.4 (86)	8.8 (224)	17.6 (447)	3.5 (89)	6.9 (175)	11.2 (284)	4.3 (109)	10.7 (271)	4.4 (111)	17.9 (455)				
61x660	60 (1520)	1.4 (35)	2.8 (71)	7.3 (185)	14.6 (370)	2.9 (73)	5.7 (145)	9.3 (236)	3.6 (91)	8.9 (226)	3.7 (94)	14.8 (376)				

Footnotes:

(1) These listed speeds are a mechanical limitation. The maximum speed of a positioning table depends on the screw diameter, screw lead, screw length, and the screw end bearing support configuration. *LINTECH* uses a rigid-rigid screw end bearing support configuration in its positioning tables. The correct motor & drive system needs to be selected in order to obtain the above maximum table speeds.





610 Series

Screws - Acme & Ball

			ROLLED BALL SCREWS										
	SCREW	Dyn. ⁽¹⁾ Capacity Ibs (kg)	Static Capacity Ibs (kg)	Screw Efficiency %	Breakaway Torque oz-in (N-m)	Position Accuracy inch/ft (microns/300 mm)	Backlash inches (microns)	Unidirectional Repeatability inches (microns)	Bidirectional Repeatability inches (microns)				
a. ad	Non-preloaded (S005)	800 (363)	6,150 (2790)	90	10 (0,07)		< 0.008 (203)		+ 0.0002 <i>to</i> - 0.0082 (5) (208)				
0.625 inch dia. 0.200 inch lead	Preloaded (S006)	720 (326)	6,070 (2753)	30	20 (0,14)	< 0.003	0	+/- 0.0002	+ 0.0002 <i>to</i> - 0.0002 (5) (5)				
0 0	<i>Non-preloaded</i> Turcite Nut (S007)	100 (45)	800 (363)	60	15 (0,11)	(75)	< 0.008 (203)	(5)	+ 0.0002 to - 0.0082 (5) (208)				
	Preloaded Turcite Nut (S008)	90 (41)	800 (363)		30 (0,21)		0		+ 0.0002 <i>to</i> - 0.0002 (5) (5)				
lia. Vad	Non-preloaded (S009)	590 (267)	2,425 (1100)	90	25 (0,18)		< 0.008 (203)		+ 0.0002 <i>to</i> - 0.0082 (5) (208)				
0.625 inch dia. 1.000 inch lead	Preloaded (S010)	530 (240)	2,390 (1084)		40 (0,28)	< 0.004 (100)	0	+/- 0.0002 (5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)				
0.6	<i>Non-preloaded</i> Turcite Nut (S011)	100 (45)	800 (363)	60	35 (0,25)		< 0.008 (203)		+ 0.0002 to - 0.0082 (5) (208)				
	Preloaded Turcite Nut (S012)	90 (41)	800 (363)		60 (0,42)		0		+ 0.0002 to - 0.0002 (5) (5)				
ia. ad	Non-preloaded (S013)	1,900 (862)	18,800 (8527)	90	20 (0,14)		< 0.008 (203)		+ 0.0002 to - 0.0082 (5) (208)				
0.750 inch dia. 0.200 inch lead	(2) Preloaded (S014)	1,710 (776)	18,610 (8441)		30 (0,21)	< 0.003	0	+/- 0.0002	+ 0.0002 to - 0.0002 (5) (5)				
0.0	<i>Non-preloaded</i> Turcite Nut (S015)	195 (88)	1,500 (680)	60	25 (0,18)	(75)	< 0.008 (203)	(5)	+ 0.0002 to - 0.0082 (5) (208)				
	Preloaded Turcite Nut (S016)	175 (79)	1,500 (680)		40 (0,28)		0		+ 0.0002 to - 0.0002 (5) (5)				
tia. ead	Non-preloaded (S017)	3,450 (1565)	24,200 (10977)	90	25 (0,18)		< 0.008 (203)		+ 0.0002 to - 0.0082 (5) (208)				
0.750 inch dia. 0.5000 inch lead	(2) Preloaded (S018)	3,150 (1429)	23,855 (10820)		40 (0,28)	< 0.003	0	+/- 0.0002 (5)	+ 0.0002 to - 0.0002 (5) (5)				
0.5	<i>Non-preloaded</i> Turcite Nut (S019)	195 (88)	1,500 (680)	60	35 (0,25)	(75)	< 0.008 (203)		+ 0.0002 to - 0.0082 (5) (208)				
	Preloaded Turcite Nut (S020)	175 (79)	1,500 (680)		60 (0,42)		0		+ 0.0002 to - 0.0002 (5) (5)				

Footnotes:

(1) Dynamic load capacity of screw based on 1 million inches of travel (25Km).

(2) There is a 0.675 inch (17,1 mm) reduction of carriage travel (from the listed travel) when using a preloaded nut with this screw option for all (-CP0), (-CP1), and (-CP2) model versions with a 6 inch carriage. All the model numbers with (-WC1) and 12 inch carriages are not affected.



Screws - Acme & Ball

					F	PRECISION B	ALL SCRE	ws	
	SCREW	Dyn. ⁽¹⁾ Capacity	Static Capacity	Screw Efficiency	Breakaway Torque	Position Accuracy	Backlash	Unidirectional Repeatability	Bidirectional Repeatability
		lbs (kg)	lbs (kg)	%	oz-in (N-m)	inch/ft (microns/300 mm)	inches (microns)	inches (microns)	inches (microns)
0.625 inch dia. 0.200 inch lead	Non-preloaded (S114)	876 (397)	2,700 (1224)	90	10 (0,07)	< 0.002	< 0.003 (76)	+/- 0.0002	+ 0.0002 <i>to</i> - 0.0032 (5) (81)
0.625 ir 0.200 in	Preloaded (S115)	788 (357)	2,430 (1102)		20 (0,14)	(50)	0	(5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)
16 mm dia. 5 mm lead	Non-preloaded (S116)	876 (397)	2,700 (1224)	90	10 (0,07)	< 0.002	< 0.003 (76)	+/- 0.0002	+ 0.0002 <i>to</i> - 0.0032 (5) (81)
16 mr 5 mm	Preloaded (S117)	788 (357)	2,430 (1102)	30	20 (0,14)	(50)	0	(5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)
16 mm dia. 10 mm lead	Non-preloaded (S118)	1,080 (489)	2,630 (1192)	90	15 (0,11)	< 0.002	< 0.003 (76)	+/- 0.0002 (5)	+ 0.0002 <i>to</i> - 0.0032 (5) (81)
16 mr 10 mn	Preloaded (S119)	972 (440)	2,365 (1072)	30	25 (0,18)	(50)	0		+ 0.0002 <i>to</i> - 0.0002 (5) (5)
n dia. 1 lead	Non-preloaded (S120)	819 (371)	1,620 (734)	90	20 (0,14)	< 0.002	< 0.003 (76)	+/- 0.0002	+ 0.0002 <i>to</i> - 0.0032 (5) (81)
16 mm dia. 16 mm lead	Preloaded (S121)	737 (334)	1,455 (659)	30	35 (0,24)	(50)	0	(5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)
0.750 inch dia. 0.200 inch lead	Non-preloaded (S122)	964 (437)	3,360 (1524)	90	15 (0,11)	< 0.002	< 0.003 (76)	+/- 0.0002	+ 0.0002 <i>to</i> - 0.0032 (5) (81)
0.750 ir 0.200 in	Preloaded (S123)	867 (393)	3,025 (1372)	30	25 (0,18)	(50)	0	(5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)
mm dia. mm lead	Non-preloaded (S124)	1,070 (485)	3,990 (1809)	90	15 (0,11)	< 0.002	< 0.003 (76)	+/- 0.0002	+ 0.0002 <i>to</i> - 0.0032 (5) (81)
20 mr 5 mm	Preloaded (S125)	960 (435)	3,590 (1628)		25 (0,18)	(50)	0	(5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)
20 mm dia. 20 mm lead	Non-preloaded (S128)	1,293 (586)	3,505 (1589)	90	25 (0,18)	< 0.002	< 0.003 (76)	+/- 0.0002	+ 0.0002 <i>to</i> - 0.0032 (5) (81)
20 mr 20 mn	Preloaded (S129)	1,160 (526)	3,150 (1428)	30	40 (0,28)	(50)	0	(5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)

Footnotes:

(1) Dynamic load capacity of screw based on 1 million inches of travel (25Km).



Screws - Acme & Ball

- Screw Drive -

		GROUND BALL SCREWS						
SCREW	Dyn. ⁽¹⁾ Capacity	Static Capacity	Screw Efficiency	Breakaway Torque	Position Accuracy	Backlash	Unidirectional Repeatability	Bidirectional Repeatability
	lbs (kg)	lbs (kg)	%	oz-in (N-m)	inch/ft (microns/300 mm)	inches (microns)	inches (microns)	inches (microns)
0.625 dia., 0.200 lead ⁽²⁾ Preloaded (S212)	987 (447)	3,080 (1397)	90	20 (0,14)	< 0.002 (50)	0	+/- 0.0002 (5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)
0.625 dia., 0.500 lead ⁽²⁾ Preloaded (S213)	1430 (649)	4,191 (1901)	90	30 (0,21)	< 0.002 (50)	0	+/- 0.0002 (5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)
16 mm dia., 5 mm lead ⁽²⁾ <i>Preloaded</i> (S214)	987 (447)	3,080 (1397)	90	20 (0,14)	< 0.002 (50)	0	+/- 0.0002 (5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)
16 mm dia., 16 mm lead ⁽²⁾ <i>Preloaded</i> (S215)	910 (412)	1,800 (816)	90	35 (0,24)	< 0.002 (50)	0	+/- 0.0002 (5)	+ 0.0002 <i>to</i> - 0.0002 (5) (5)

						ROLLED ACI	ME SCREW	vs	
	SCREW	Dyn. ⁽¹⁾ Capacity	Static Capacity	Screw Efficiency	Breakaway Torque	Position Accuracy	Backlash	Unidirectional Repeatability	Bidirectional Repeatability
		lbs (kg)	lbs (kg)	%	oz-in (N-m)	inch/ft (microns/300 mm)	inches (microns)	inches (microns)	inches (microns)
inch dia. inch lead	Non-preloaded (S300)	160 (73)	800 (363)	40	10 (0,07)	< 0.003	< 0.008 (203)	+/- 0.0002	+ 0.0002 to - 0.0082 (5) (208)
0.625 ir 0.100 in	Preloaded (S301)	140 (64)	720 (327)	40	20 (0,14)	(75)	0	(5)	+ 0.0002 to - 0.0002 (5) (5)
inch dia. inch lead	Non-preloaded (S302)	160 (73)	800 (363)	40	15 (0,11)	< 0.003	< 0.008 (203)	+/- 0.0002	+ 0.0002 to - 0.0082 (5) (208)
0.625 in 0.200 in	Preloaded (S303)	140 (64)	720 (327)	40	30 (0,21)	(75)	0	(5)	+ 0.0002 to - 0.0002 (5) (5)

Footnotes:

(1) Dynamic load capacity of screw based on 1 million inches of travel (25Km).

(2) The 0.625 inch & 16 mm diameter Ground Ball Screw options are only available in travel lengths where the screw length is less than 47 inches (1194 mm).

- 6 inch Carriage -




Linear Bearing Load Capacities

The following equation, and graphs, can be used to help determine the linear bearing life, and load capacity, of a 610 series 6 inch carriage positioning table.

$$L = \left[\frac{R}{F \times S}\right]^3 \times B$$

- L = calculated travel life (millions of inches or Km)
- R = rated dynamic load capacity of carriage (or each bearing) at 2 million inches of travel or 50 Km
- **F** = user applied load
- **S** = safety factor (1 to 8)
- **B** = either 2 (for millions of inches) or 50 (for Km)



Dynamic Moment Load (M_R) Capacity


Load applied away from Carriage Center

travel life		2 Bearing		4 Be	aring
millions of inches	(Km)	ft-lbs	(N-m)	ft-lbs	(N-m)
2	(50)	460	(624)	920	(1247)
50	(1270)	157	(213)	313	(424)
100	(2540)	124	(168)	247	(335)
Ratings are based on $d_3 = 12$ inches (305 mm) & $d_4 = 0$					

ft-lbs (N-m) (1356) 1,000 Applied Load - from carriage center ⁴ Bearing 400 (542) ² Bearing 200 (271)100 (136) 60 (81) 40 (54)(27) 20 4 10 40 100 1 (102) (25) (254)(1016) (2540)**Travel Life** millions of inches (Km)

Dynamic Horizontal Load Capacity Load Centered on Carriage

				-	
travel life		2 Be	earing	4 Bearing	
millions of inches	(Km)	lbs	(kg)	lbs	(kg)
2	(50)	3,890	(1765)	7,780	(3530)
50	(1270)	1,325	(601)	2,650	(1202)
100	(2540)	1,045	(474)	2,090	(948)

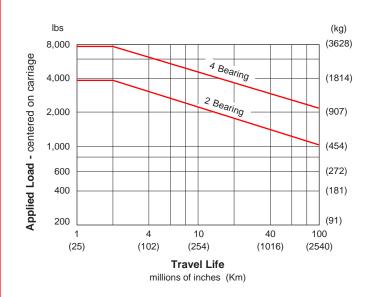


Dynamic Moment Load ($M_P \& M_Y$) Capacity

Load applied away from Carriage Center

travel life		2 Bearing		4 Be	earing
millions of inches	(Km)	ft-lbs	(N-m)	ft-lbs	(N-m)
2	(50)	71	(96)	980	(1328)
50	(1270)	24	(33)	334	(453)
100	(2540)	19	(26)	263	(356)

Ratings are based on $d_3 = 0 \& d_4 = 12$ inches (305 mm)







End of Travel (EOT) Switches & Home Switch

LINTECH provides several options for EOT & home switches. One style uses mechanically actuated switches, while other styles use "non-contact" versions. When ordered with a LINTECH 610 series table, each switch is mounted to the side of the table, while the actuating cams are mounted to the carriage assembly. The *T*-*slot* which runs along both sides of the 610 series, allows the switches to be located anywhere along the table. The switches are pre-wired by LINTECH for easy interfacing to the users Motion Controller.

End of Travel (EOT) Switches


End of travel (EOT) switches can be utilized by a motion controller to stop carriage motion, thereby preventing any damage to personnel, table carriage, or user mounted load if the extreme end of travel has been reached by the carriage. There are two EOT switches mounted to the side of the table, one on each end. The CCW switch is mounted at the motor mount end, while the CW switch is located at the opposite end of the table. *LINTECH* provides normally closed (NC) end of travel switches. This provides for a power-off fail safe system, where the position controller can detect broken wires. *It is highly recommended that any positioning table used with a position controller, should have end of travel switches installed for protection of personnel, table carriage, and user mounted load.*

Home Switch

The home switch can be utilized by a motion controller as a known fixed reference location on the positioning table. The switch is located between the EOT switches, near the motor mount end, and is a normally open (NO) switch.

Switch Locations

The following diagram shows the locations of the switches when ordered from LinTECH. Switches can be located on left or right hand side. Below diagram shows -LxxL (left side - when looking at non-driven end plate).

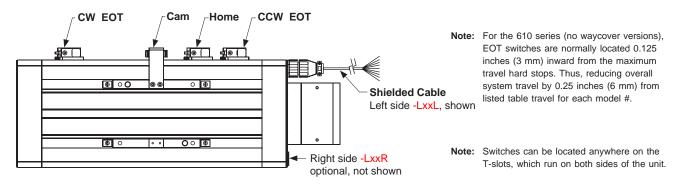

Switch Type	Cost	Repeatability inches (microns)	Actuated	Power Supply Required	Activation Area inches (mm)	Comments
mechanical	least expensive	+/- 0.0002 (5)	mechanical	No	1.75 (44,45)	for most applications
reed	slightly more	+/- 0.0020 (50)	magnetic	No	0.30 (7,62)	for non-contact & low repeatable applications
hall effect	medium priced	+/- 0.0002 (5)	magnetic	Yes	0.32 (8,13)	for non-contact and wash down applications
proximity	most expensive	+/- 0.0002 (5)	non-magnetic	Yes	1.75 (44,45)	for non-contact, high speed, & wash down applications

Note: The repeatability of any switch is dependent upon several factors: carriage speed, accel rate, load weight, switch style, and the position controller. *LINTECH*'s ratings are based upon a carriage speed of 0.5 inches/sec (12.7 mm/sec) and a no load condition.



End of Travel (EOT) Switches & Home Switch

Mechanical Switches




Repeatability Electrical

: +/- 0.0002 inch (5 microns) : 5 amps @ 125 VAC 1 amp @ 85 VDC

Activation Style Activation Area

- **Temperature Range**
- Environment
- Added Table Width
- : mechanical cam
- : 1.75 inches (44,45 mm) of travel
- : 25° C to + 85° C
- : non wash down
- : 0.063 inch (1,6 mm) (EOT switches) 0.063 inch (1,6 mm) (Home switch)



Non-Contact Reed Switches

Repeatability

Electrical

- Activation Style Activation Area **Temperature Range** Environment
- Added Table Width

NO Switch

NO (<u>red</u>)

(black)

С


- : +/- 0.0020 inch (50 microns)
- : 1.0 amps @ 125 VAC 0.5 amps @ 100 VDC
- : magnetic
- : 0.30 inches (7,62 mm) of travel
- : 10° C to + 60° C
- : non wash down
- : 0.063 inch (1,6 mm) (EOT switches) 0.063 inch (1,6 mm) (Home switch)


NC Switch

NC (black)

(black)

С






Standard LINTECH Wiring (provided with switch option)


Female connector wired to: 10 foot (3 m) shielded cable. 6 conductor, 24 AWG, unterminated leads

Pin	Wire Color	Description	
2	Black	CW EOT	
3	Blue	CW Common	
5	White	CCW EOT	NC
6	Green	CCW Common	
8	Yellow	HOME	- NO
9	Grey	HOME Common	
	Silver	Shield	

Note: Hermetically sealed mechanical switches can be ordered as an option. This may be desired for "wash down" applications. Contact LINTECH.

Specifications subject to change without notice





Standard LINTECH Wiring (provided with switch option)

Female connector wired to: 10 foot (3 m) shielded cable. 6 conductor, 24 AWG, unterminated leads

Pin	Wire Color	Descr	iption
2	Black	CW EOT	(black)
3	Blue	CW Common	(black) NC
5	White	CCW EOT	(black)
6	Green	CCW Common	(black) NC
8	Yellow	HOME	(red)
9	Grey	HOME Common	(black) NO
	Silver	Shield	




End of Travel (EOT) Switches & Home Switch

Non-Contact Hall Effect Switches



Repeatability	: +/- 0.0002 inch (5 microns)
Electrical	: 5 - 24 VDC 15 mA - power input 25 mA max - signal
Actuation Style	: magnetic
Activation Area	: 0.32 inches (8,13 mm) of travel
Temperature Range	: - 10° C to + 60° C
Environment	: wash down
Added Table Width	: 0.063 inch (1,6 mm) (EOT switches) 0.063 inch (1,6 mm) (Home switch)





Standard *LINTECH* Wiring (provided with switch option)


Female connector wired to: 10 foot (3 m) shielded cable, 9 conductor, 24 AWG, unterminated leads

Pin	Wire Color	E	Description
1	Brown	CW Power	(brown)
2	Black	CW EOT	(black) switch NC
3	Blue	CW Common	(blue)
4	Red	CCW Power	(brown)
5	White	CCW EOT	(black) switch NC
6	Green	CCW Common	(blue)
7	Orange	Home Power	(brown)
8	Yellow	Home	(black) switch NO
9	Grey	Home Common	(blue)
	Silver	Shield	

Non-Contact Proximity Switches



Repeatability	: +/- 0.0002 inch (5 microns)
Electrical	: 10 - 28 VDC 15 mA - power input 100 mA max - signal
Actuation Style	: non-magnetic cam
Activation Area	: 1.75 inches (44,45 mm) of travel
Temperature Range	: - 25° C to + 75° C
Environment	: IEC IP67 wash down
Added Table Width	: 0.20 inch (5,1 mm) (EOT switches) 0.20 inch (5,1 mm) (Home switch)





Standard *LINTECH* Wiring (provided with switch option)


Female connector wired to: 10 foot (3 m) shielded cable, 9 conductor, 24 AWG, unterminated leads


Pin	Wire Color	E	Description
1	Brown	CW Power	(brown)
2	Black	CW EOT	(black) switch NC
3	Blue	CW Common	(blue)
4	Red	CCW Power	(brown)
5	White	CCW EOT	(black) switch NC
6	Green	CCW Common	(blue)
7	Orange	Home Power	(brown)
8	Yellow	Home	(black) switch NO
9	Grey	Home Common	(blue)
	Silver	Shield	




Motor Couplings

LINTECH provides three different types of couplings that can be used to mount a motor to a positioning table. These couplings compensate for misalignment between the motor shaft & screw (or belt) drive shaft extension. This provides for troublefree operation as long as certain precautions are taken. The connected motor output torque should never exceed the coupling maximum torque capacity. Larger capacity couplings may be required for applications having high accelerations, large back driving loads, high torque output motors, or servo motors.







Model (1)	D	L		Bor	e Diamete	ers		Weight	Inertia	Wind-up	Max Torque
Number	inches (mm)	inches (mm)	Table	Motor	<i>Minimu</i> (in) (mr		<i>laximum</i> n) (mm)	ounces (grams)	oz-in² (g-cm²)	arc-sec/oz-in (deg/N-m)	oz-in (N-m)
C100-375-aaa	1.00 (25,4)	1.50 (38,1)	375	aaa	.250 6	š.3	75 10	1.5 (43)	.19 (35)	23.0 (0,9)	400 (2,8)
C125-375-aaa	1.25 (31,8)	2.00 (50,8)	375	aaa	.250 6) .5	00 14	3.5 (99)	.68 (124)	15.0 (0,59)	700 (4,9)
H100-375-aaa	1.00 (25,4)	1.28 (32,5)	375	aaa	.250 6	6.3	75 10	1.2 (34)	.15 (27)	7.2 (0,28)	450 (2,8)
H131-375-aaa	1.31 (33,3)	1.89 (48,0)	375	aaa	.250 6	6. 6	25 16	2.9 (82)	.62 (114)	2.5 (0,098)	1,000 (7,1)
H163-375-aaa	1.63 (41,4)	2.00 (50,8)	375	aaa	.375 10).7	50 20	5.4 (153)	1.79 (328)	1.2 (0,047)	2,000 (14,1)
G100-375-aaa	0.99 (25,2)	1.26 (32,0)	375	aaa	.250 6	6.5	00 12	1.3 (36)	.16 (29)	1.0 (0,39)	500 (3,5)
G126-375-aaa	1.26 (32,1)	1.62 (41,0)	375	aaa	.250 6	6. 6	25 16	2.7 (74)	.54 (99)	0.3 (0,012)	1,100 (7,7)
G158-375-aaa	1.58 (40,2)	1.85 (47,0)	375	aaa	.375 10).7	50 20	4.3 (120)	1.34 (245)	0.2 (0,008)	2,400 (17,0)
Possible values for aaa	375 = 500 =	.250 inch .375 inch .500 inch .625 inch	75	0 = .750	0 0	3 = 80	5 mm 3 mm 9 mm 0 mm	011 = 012 = 014 = 016 =	14 mm	018 = 18 019 = 19 020 = 20	9 mm

Footnotes:

(1) Some couplings are either too large or too long to fit into a particular motor mount. See page E-67 for maximum coupling diameter and length specifications for use with the optional NEMA 23 & 34 motor mounts. Visit our website to see which couplings are available and fit into other standard motor mounts. Custom motor mounts can be provided upon request.



610 Series

Motor Couplings

Coupling	Cost	Torque Capacity	Wind-up	Suggested Motor	Comments
С Туре	least expensive	light	the most	st stepper ideal for most step motor applications	
Н Туре	medium priced	medium	medium	um stepper or servo use for high accels & for starting & stop inertia loads	
G Туре	most expensive	high	the least	servo	use for very high torque requirements & very high servo accelerations

Specification	610 Series NEMA 23 bracket inches (mm)	610 Series NEMA 34 bracket inches (mm)				
Shaft extension diameter at motor mount end	0.375 (9,53)	0.375 (9,53)				
Maximum coupling diameter	1.500 (38,10)	1.500 (38,10)				
Maximum coupling length	1.750 (44,45)	2.250 (57,15)				
Note: Custom brackets available upon request.						


Coupling Part Numbers

C025 C026 C027 C028 C030 C029	C100-375-250 C100-375-375 C100-375-006 C100-375-008 C100-375-009 C100-375-010	C130 C131 C132 C133 C133 C135 C134	H100-375-250 H100-375-375 H100-375-006 H100-375-008 H100-375-009 H100-375-010	C190 C191 C192 C193 C194 C195	H163-375-500 H163-375-625 H163-375-750 H163-375-010	C407 C408 C409 C410 C411 C414	G100-375-250 G100-375-375 G100-375-500 G100-375-006 G100-375-008 G100-375-009	C470 C471 C472 C473 C474 C514	G158-375-375 G158-375-500 G158-375-625 G158-375-750 G158-375-010 G158-375-011
C048 C049 C050 C051 C052 C053 C054 C055 C069	C125-375-250 C125-375-375 C125-375-500 C125-375-006 C125-375-008 C125-375-010 C125-375-012 C125-375-014 C125-375-016	C155 C156 C157 C158 C159 C160 C183 C161 C184 C162 C163 C164	H131-375-250 H131-375-375 H131-375-500 H131-375-625 H131-375-008 H131-375-008 H131-375-009 H131-375-010 H131-375-011 H131-375-012 H131-375-014 H131-375-016	C197 C198 C199 C200	H163-375-019	C415 C435 C436 C437 C438 C439 C440 C463 C441 C464 C442 C443 C444	G100-375-011 G100-375-012 G126-375-250 G126-375-375 G126-375-500 G126-375-625 G126-375-006 G126-375-008 G126-375-009 G126-375-010 G126-375-011 G126-375-012 G126-375-014 G126-375-016	C476 C477 C478 C479 C480	G158-375-014 G158-375-016 G158-375-018 G158-375-019 G158-375-020




NEMA 34 Motor Mount

A NEMA 34 aluminum motor adapter bracket can be mounted to the 610, series positioning tables. The bracket can be ordered in either an English, or Metric motor mount. *LINTECH* can provide adapter brackets for any step motor, or servo motor, that has other mounting requirements.

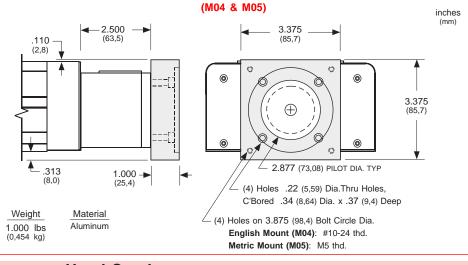

Hand Crank

For manually operated applications, LINTECH provides a hand crank option for the 610 table series. The hand crank replaces the motor mount and coupling on the table.



Other Motor Mounts

LINTECH can provide motor adapter brackets for any step motor, or servo motor, that has mounting requirements other than what are shown in this catalog. Please review our Website for the latest information on standard motor mounts that are readily available. Listed as standard options include some: Rockwell, Mitsubishi, Praker, and Yaskawa metric motors models.






610 Series

Motor Wrap Packages for 610 Series

For space limited 610 series applications, a belt and pulley system can couple the screw shaft extension to the motor shaft. This wraps the motor parallel to the table in order to decrease the overall positioning system length. Pulley weights and diameters are given in order to assist in calculating motor torque requirements.

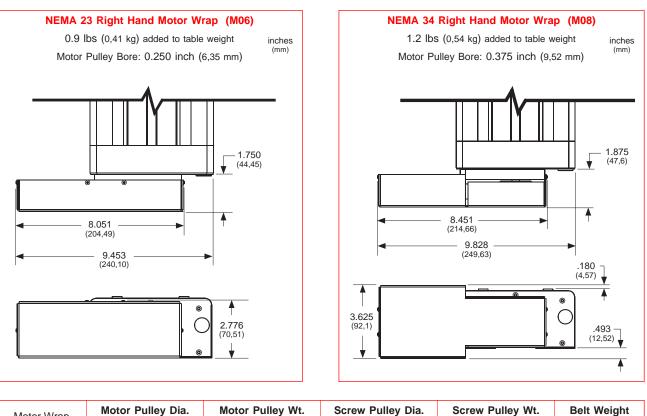

Motor Wrap Frame Size	Motor Pulley Dia. inches (mm)	Motor Pulley Wt. ounces (kg)	Screw Pulley Dia. inches (mm)	Screw Pulley Wt. ounces (kg)	Belt Weight ounces (kg)
NEMA 23	1.65	7.5	1.65	7.5	1.0
	(41,9)	(0,21)	(41,9)	(0,21)	(0,028)
NEMA 34	1.65	8.0	1.65	8.0	1.2
	(41,9)	(0,23)	(41,9)	(0,23)	(0,034)

Note: Right hand motor wraps shown. The left hand wrap packages orient the motor to the opposite side of the table. Motor pulley & belt shipped "loose". No motor mount nuts & bolts are provided. Custom motor wrap packages are available upon request. Other motor pulley bores MUST be specified for non-NEMA motors.

Chrome Plated Linear Bearings, Rails, and Screws

For applications in high moisture, high humidity, clean room, or highly corrossive environments, chrome plating of the linear bearings, linear rails, and screw will offer superior resistance to corrosion than stainless steel components, resulting in longer table life. The process uniformly deposits dense, hard, high chromium alloy on the rails or screw, and has a Rockwell C hardness value of 67-72. This process also conforms to MIL Spec: (MIL-C-23422). The chrome plating bonds to the parent material and will not crack or peel off under the high point loading of balls on the rail, or screw. This chrome plating process differs from a normal hard chrome plate which just lays on the surface of the part plated.



610-SE Power-off Electric Brakes

For vertical table applications, or for those applications requiring the load to be locked securely in place, an electric brake may be mounted to the positioning table. The 610 series will have the brake mounted to the screw shaft extension located on the table end, opposite the motor mount bracket. The 620 series will have the brake mounted to the thru drive shaft option. With proper wiring from a control system, this power-off friction brake can ensure that the carriage is firmly held in place, when no electric power is applied to the brake. When power is applied to the brake, the brake is opened or "released".

For proper emergency braking of the positioning table, this electric brake needs to be interfaced to a position controller or relay network. LINTECH also provides 24 & 90 VDC power supplies which can be used to power the brakes.


Brakes

Model	Holding Force	Excitation Voltage	Current	Weight
Number	in-lbs (N-m)	volts	amps	lbs (kg)
B01	18 (2,0)	24 VDC	0.733	1.4 (0,62)
B02	18 (2,0)	90 VDC	0.178	1.4 (0,62)

Note: This power-off electric brake MUST NOT be engaged when the positioning table is in motion. Moving the table with the brake applied could damage the brake and the positioning table. Also, continuous use of this brake to stop a table (load) that is in motion could damage the brake and the positioning table. Dynamic braking of a positioning table should be done by the motor and not the brake.

Power Supplies

Model		DC Out	put	AC Input			
Number	volts	amps	style	volts	amps	Hz	
41970	5	3.0	regulated	120 / 240	0.8 / 0.4	47-63	
37488	24	1.2	regulated	120 / 240	0.8 / 0.4	47-63	
37489	90	0.8	unregulated	120	1.0	50/60	
37490	90	0.8	unregulated	240	0.5	50/60	

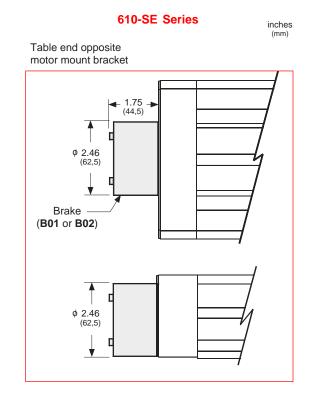






Rotary Incremental Encoders

Incremental, optical rotary encoders can be mounted to the end of the LINTECH 610-SE series table. These shaftless optical rotary encoders are mounted to the screw shaft extension opposite the motor mount end. These encoders provide positional feedback to either a motion controller, or a digital position display.

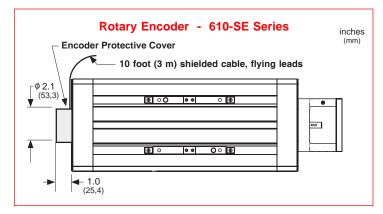

Din Pin #	Wire Color	Description
С	White	Channel A ⁺ (or A)
D	Blue	Channel A ⁻ (or \overline{A})
E	Green	Channel B ⁺ (or B)
L	Orange	Channel B ⁻ (or B)
G	White/Black	Channel Z ⁺ (or Z)
н	Red/Black	Channel Z ⁻ (or \overline{Z})
А		Case ground
В	Black	Common
К	Red	+ 5 vdc (+/- 5%)

Specification	ROTARY ENCODERS						
	E01	E02	E03				
Line Count	500 lines/rev	1000 lines/rev	1270 lines/rev				
Pre Quadrature Resolution	0.002 revs/pulse	0.001 revs/pulse	0.00079 revs/pulse				
Post Quadrature Resolution	0.0005 revs/pulse	0,00025 revs/pulse	0.00019 revs/pulse				
Accuracy							
Maximum Speed		50 revs/sec					
Maximum Accel	40 revs/sec ²						
Excitation Power	+ 5 VDC @ 125 ma						
Operating Temperature	32° F to 140° F (0° C to 60° C)						
Humidity	20% to 80% non condensing						
Shock	10	10 G's for 11 msec duration					
Weight	0.7 lbs (0,283 kg)						
Cable Length	10 ft (3 m), unterminated 26 gauge leads						
Zero Reference Output	Once per revolution						
Outputs	TTL square wave; 2	channel (A+/B+); Differen	tial (A-/B-); Line Driver				



Multi-Axis Configurations

LINTECH can provide adapter plates & vertical brackets, to facilitate the construction of X-Y, X-Z, X-Y-Z, Cartesian, and other multi-axis configurations. There are hundreds of possible configurations available. See below for some common systems. *LINTECH* has experience dealing with multiple axis configurations. Sometimes different standard table series can be mounted to form a custom system. Other times, a custom assembly can be created. Contact *LINTECH* for more information.

