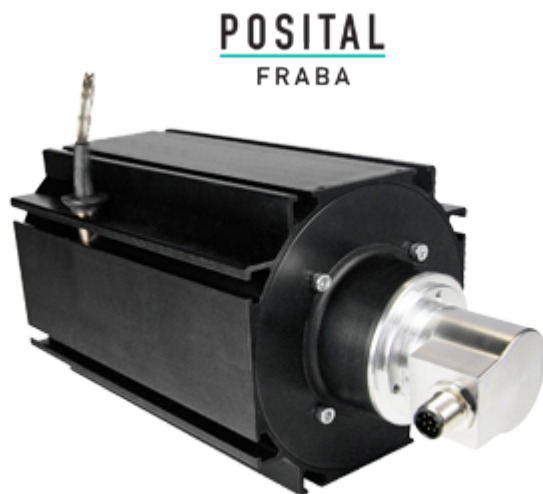



**LINARIX Linear Sensor**
**LU0-CA01B-1213-FR00-PRM**

**General Data**
**General Data**

Supply Voltage	9 - 30 VDC
Power Consumption	≤ 1.2 W
Operating Temperature	-20 °C (-4 °F) - +80 °C (+176 °F)
Weight	3755 g (8.28 lb)
Protection Class (Encoder)	IP64 / IP65
EMC: Emitted Interference	DIN EN 61000-6-4
EMC: Noise Immunity	DIN EN 61000-6-2

**Mechanical Data**

Max. Measurement Length	15.00 m (49.21')
Length per Revolution	315 mm
Wire Material	Coated Polyamide Stainless Steel
Wire Diameter	1.00 mm
Encoder Housing Material	Steel
Draw Wire Housing Material	Aluminum
Max. Speed of Wire Displacement	2.0 m / s
Max. Wire Acceleration	3.0 g
Max. Extension Force	25.0 N
Min. Retraction Force	8.0 N

Data Sheet

Printed at 4-11-2021 15:11



Actuation Lifetime	0.5 mio Cycles (Estimated based on ideal conditions)
Wire Mounting	Eyelet
Max. Wire Exit Angle	$\pm 3^\circ$

### Sensor Data

Technology	Magnetic ( $\leq 0.09^\circ$ )
Accuracy	$\pm 0.01$ % FSO
Repeatability	$\pm 0.001$ % FSO
Resolution [Encoder - Singleturn]	13 bit
Resolution [Encoder - Multiturn]	12 bit
Approx. Linear Resolution	38.5 $\mu\text{m}$
Output Code	Binary

### Interface

Communication Interface	CANopen
Profile	DS-406
Programming Functions	Resolution, preset, 2 limit switches, 8 CAMS, baud rate, CAN-Identifier, bootloader, transmission modes: polled, cyclic, sync
Transmission Rate	min. 20 kBaud, max. 1 MBaud
Cycle Time Interface	$\geq 1$ ms


### Outputs

Output Driver	Transceiver (ISO 11898), Galvanically Isolated by Opto-Coupl
Current Consumption	$\leq 70$ mA @ 10 V DC, $\leq 50$ mA @ 24 V DC
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
MTTF	240 years @ 40 °C

### Electrical Connection

Connection Orientation	Radial
Connection Orientation (w.r.t Draw Wire)	Radial 0 / Axial
Connection Type	Cable / Connector
Connector	M12, Male, 5 pin, a coded

### Product Life Cycle

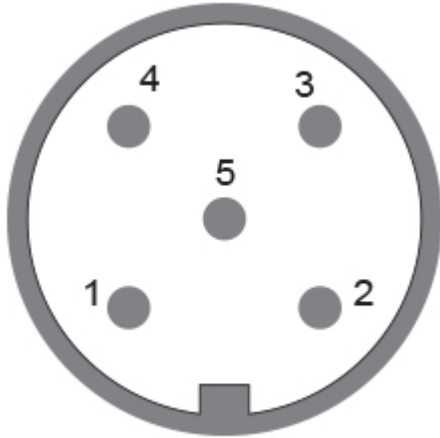
**Connection Plan**

SIGNAL	PIN NUMBER
Power Supply	2
GND	3
CAN High	4
CAN Low	5
CAN GND	1

Connector-View on Encoder

**Dimensional Drawing**
[2D Drawing](#)
**Accessories**

Connectors &amp; Cables

POS M12 5pin-A Female+5m PUR Cable

POS M12 5pin-A Female+2m PUR Cable

POS M12 5pin-A Female+10m PUR Cable

10m PUR Cable, 5pin, A-Coded, f IP69K

M12, 5pin A-Coded, Female

[More](#)

Data Sheet

Printed at 4-11-2021 15:11



**Got questions? Need an individual solution? We are here to help!**

**Sold & Serviced By:**

Contact Us



*Canadian and International Sales*

**ELECTROMATE**

**877-737-8698**

[sales@electromate.com](mailto:sales@electromate.com)

[www.electromate.com](http://www.electromate.com)

*U.S. Sales*

**SERVO2GO.com**

**877-378-0240**

[sales@servo2go.com](mailto:sales@servo2go.com)

[www.servo2go.com](http://www.servo2go.com)

All dimension in [inch] mm. Encoder dimensions may vary depending on electrical interface and connector. This drawing and the information contained is for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.