



## VACUUM GRIPPERS



Robotiq Vacuum Grippers can handle a wide range of applications and are ideal for picking up uneven and even surfaces made of different materials such as cardboard, glass, sheet metal (dry) and plastic. Because of the customizable bracket and unique air nodes, Robotiq Vacuum Grippers provide manufacturers full control over their gripper to make sure it's a perfect fit for their applications.

### SMOOTH HANDLING FOR YOUR APPLICATIONS



Pick and place



Palletizing



Assembly



Packaging



Machine tending

#### EXAMPLES

- Flat plastic parts can be taken off a conveyor and stacked in a bin with an EPick Vacuum Gripper.
- Wrapped cakes can be put in a box with an EPick Vacuum Gripper and the box can then be placed on a pallet using an AirPick Vacuum Gripper.
- Bundles of cards can be picked up off a transport cart and loaded on a conveyor with an EPick Vacuum Gripper.
- Wrapped books and magazines can be stacked on a pallet so as they lay flat on top of one another. An AirPick Vacuum Gripper can pick them up and stack them in a box.

**UP AND RUNNING  
IN 30 MINUTES**

## **AIR PICK**

- Powerful vacuum flow
- Low noise
- Compact design for cobots

## **E PICK**

- No air supply
- Perfect for non porous material
- Easy to handle

### **BUILT FOR INDUSTRIAL APPLICATIONS**


EASY PROGRAMMING

EASY INSTALLATION

PLUG + PLAY

FULLY CUSTOMIZABLE

### **SUCTION CUPS SYSTEM**

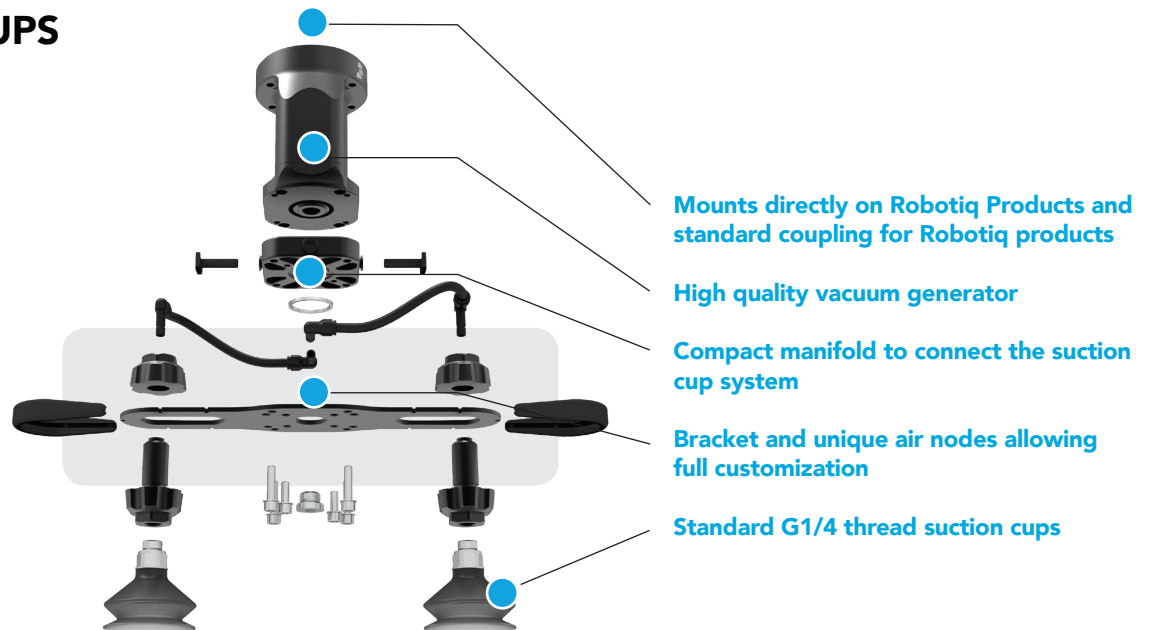

Sold & Serviced By:

 **ELECTROMATE**

Toll Free Phone (877) SERV098  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

AVAILABLE  
ROBOTIQ KITS  
FOR  
**AIR PICK**



AVAILABLE  
ROBOTIQ KITS  
FOR  
**E PICK**



# EASY TO INTEGRATE EASY TO USE

## SPECIFICATIONS

	Unit	EPick	AirPick
Energy source	-	Electricity	Compressed air
Gripper mass	g	710	481
Maximum Vacuum level	%	80	80
Maximum Vacuum flow	L/min	12	81,5
Air consumption	L/min	-	113
Minimum Feed pressure	bar	-	3
Maximum Feed pressure	bar	-	7
Connection, compressed air	mm OD Tube	-	8
Operating ambient temperature	°C	5 to 40	0 to 50
Humidity	%RH, non-condensing	20-80	20-80

## WHAT'S NEXT?

**START  
PRODUCTION  
FASTER**

Sold & Serviced By:



Toll Free Phone (877) SERV098  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)



[robotiq.com](http://robotiq.com)