

# VISOR® V10 Code Reader Professional, medium field of view

Multi-Code Reader for 1D and 2D codes and OCR



EtherNet/IP

## PRODUCT HIGHLIGHTS

- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D barcodes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass
- Reading OCR fonts

Optical data		Functions	
Resolution	800 x 600 pixels	Number of jobs / detectors	max. 255 / max. 255
Imaging chip CMOS	1/3.6", monochrome	Detectors	Position tracking: X/Y and orientation;
Integrated lens, focal length [mm]	9.6 (medium)		<b>Pattern matching, contour:</b> teach-in and detection of patterns and contours;
Pixel size	4.8 µm x 4.8 µm		<b>Grey threshold, brightness:</b> evaluation of brightness;
Focus	Motorized		<b>Contrast:</b> evaluation of contrast;
Adjustment range	12 mm to infinity		<b>Barcode:</b> reading 1D barcodes; EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, code 32, code 39, code 93, code 128, ECC200 GS1, pharm code, codabar;
Integrated illumination	White (5000 K), red (635 nm), infrared (850 nm) LEDs		<b>Datacode:</b> reading 2D codes: ECC200 (GS1), QR code (GS1), Micro QR code, Aztec code (GS1), PDF 417;
Minimum field of view, X x Y	7 x 3 mm		<b>OCR:</b> reading of fonts;
Target laser	Laser: red (635 nm) class 1 ⚠ (IEC 60825-1)		<b>Result processing, Text:</b> checking and calculating with results from detectors
Electrical data		Mechanical data	
Operating voltage, +U <sub>B</sub>	18 ... 30 DC <sup>1</sup>	Dimensions	70.4 x 45 x 45 mm (without plug)
Current consumption (without I/O)	≤ 300 mA	Enclosure rating	IP 67 & IP 65
Protective circuits	Reverse-polarity protection, U <sub>B</sub> / short-circuit protection of all outputs	Material, housing	Aluminium, die-cast, RoHS compliant
Power On Delay	Approx. 13 s after Power on	Material, front screen	Plastic
Outputs	PNP/NPN (switchable)	Ambient temperature: operation	0 ... +50 °C <sup>2</sup>
Max. output current (per output)	50 mA, 100 mA (pin 12)	Ambient temperature: storage	-20 ... +60 °C <sup>2</sup>
Switching threshold inputs incl. encoder	PNP/NPN	Weight	Approx. 200 g
Input resistance	High > U <sub>B</sub> -1 V / Low < 3 V	Plug connections	Supply and I/O M12, 12-pin Ethernet M12, 4-pin
Interfaces	> 20 kΩ	Vibration resistance	EN 60068-2-6
VISOR® V20-CR-Advanced	Ethernet (LAN), EtherNet/IP, PROFINET, SensoWeb, Service Port	Shock resistance	EN 60068-2-27
Inputs/outputs	2 inputs, 2 outputs, 6 selectable inputs/outputs		
Encoder	✓		

<sup>1</sup> Max. ripple < 5 V<sub>SS</sub>    <sup>2</sup> 80 % air humidity, noncondensing

Sold & Serviced By:




Toll Free Phone (877) SERV098

[www.electromate.com](http://www.electromate.com)

[sales@electromate.com](mailto:sales@electromate.com)


# VISOR® vision sensor

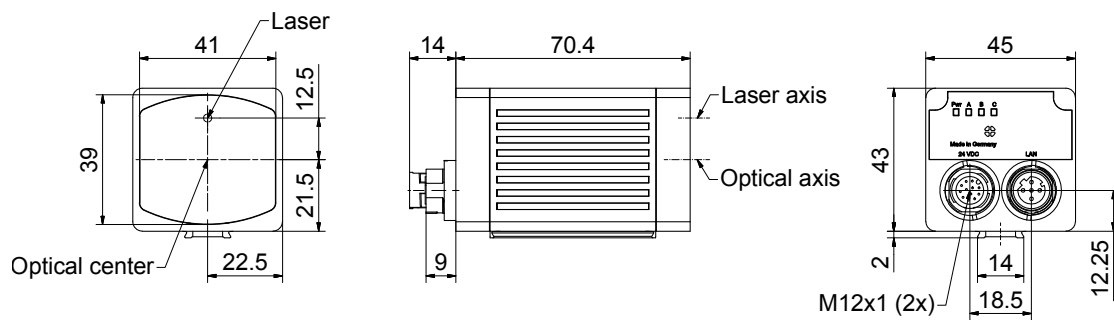

153-13554

4

## Field of view V10, medium

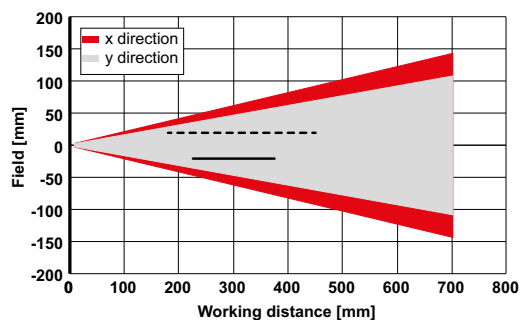

155-03100

----- Increased depth of field  
 ——— Normal depth of field

Illumination	Part number	Article number	Accessories	
White	V10-CR-P3-W-M-M2-L	631-91084	Connection cables	<a href="http://www.sensopart.com/en/accessories">www.sensopart.com/en/accessories</a>
White	V10-CR-P3-W-MD-M2-L	631-91087	Illumination	
Red	V10-CR-P3-R-M-M2-L	631-91089	Brackets	
Red	V10-CR-P3-R-MD-M2-L	631-91092	Interface accessories	
Infrared	V10-CR-P3-I-M-M2-L	631-91094		
Infrared	V10-CR-P3-I-MD-M2-L	631-91097		

Sold & Serviced By:

 **ELECTROMATE**

Toll Free Phone (877) SERV098

[www.electromate.com](http://www.electromate.com)

[sales@electromate.com](mailto:sales@electromate.com)