



# VISOR® V10 Robotic Advanced, narrow field of view

Vision sensor for object detection, presence check, completeness check, measurement and positioning tasks

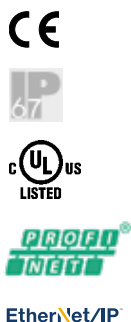

## PRODUCT HIGHLIGHTS

- Simple calibration methods for robotics applications
- Result offset 3D for direct gripper point transmission to robot
- Easy adjustment of the work plane
- Target Mark technology provides 3D object poses in no time

Optical data		Functions	
Resolution	800 x 600 Pixel	Number of jobs / detectors	Max. 255 / max. 255
Imaging chip CMOS	1/3.6", monochrome / color	Detectors	Position tracking; X/Y and orientation; <b>Pattern matching, contour:</b> teach-in and detection of patterns and contours; <b>Target Mark 3D:</b> 3D pose determination; <b>Calliper:</b> distance between edges; <b>BLOB, grey threshold, brightness:</b> evaluation of brightness; <b>Contrast:</b> evaluation of contrast; <b>Result processing: Math:</b> checking and calculating with results from detectors
Integrated lens, focal length [mm]	20 (narrow)		
Pixel size	4.8 µm x 4.8 µm		
Focus	Motorized		
Adjustment range	100 mm to infinity		
Integrated illumination	White (5000 K), red (635 nm) <sup>1</sup> , infrared (850 nm) <sup>1</sup> LEDs		
Minimum field of view, X x Y	14 x 10 mm		
Target laser	Laser: red (635 nm) class 1  (IEC 60825-1)		
Electrical data		Mechanical data	
Operating voltage, +U <sub>B</sub>	18 ... 30 DC <sup>3</sup>	Dimensions	70.4 x 45 x 45 mm (without plug)
Current consumption (without I/O)	≤ 300 mA	Enclosure rating	IP 67 & IP 65
Protective circuits	Reverse-polarity protection, U <sub>B</sub> / short-circuit protection of all outputs	Material, housing	Aluminium, die-cast, RoHS compliant
Power On Delay	Approx. 13 s after Power on	Material, front screen	Plastic
Outputs	PNP/NPN (switchable)	Ambient temperature: operation	0 ... +50 °C <sup>4</sup>
Max. output current (per output)	50 mA, 100 mA (pin 12)	Ambient temperature: storage	-20 ... +60 °C <sup>4</sup>
Switching threshold inputs incl. encoder	PNP/NPN High > U <sub>B</sub> -1V / Low < 3V	Weight	Approx. 200 g
Input resistance	> 20 kΩ	Plug connections	Supply and I/O M12, 12-pin, Ethernet M12, 4-pin
Interfaces	Ethernet (LAN), EtherNet/IP, PROFINET, SensoWeb, Service Port	Vibration resistance	EN 60068-2-6
Inputs/outputs	2 inputs, 2 outputs, 6 selectable inputs/outputs	Shock resistance	EN 60068-2-27
Encoder	✓		


<sup>1</sup> Not color hardware    <sup>2</sup> Color hardware    <sup>3</sup> Max. ripple < 5V<sub>s</sub>    <sup>4</sup> 80 % air humidity, noncondensing

Sold & Serviced By:



Toll Free Phone (877) SERV098  
www.electromate.com  
sales@electromate.com


VISOR® vision sensor

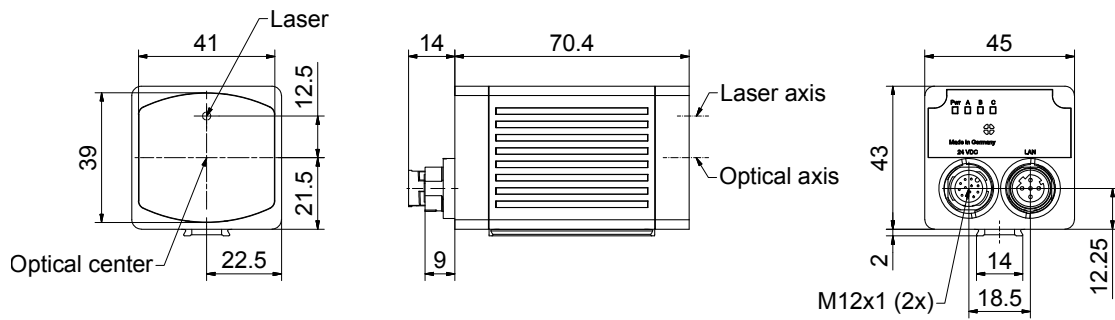

153-13554

3

Field of view V10, narrow

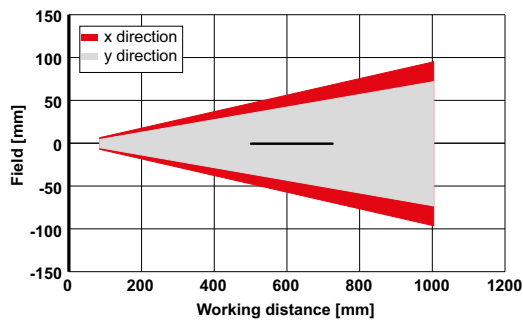

155-03097

— Normal depth of field

Illumination	Part number	Article number	Accessories
White	V10-RO-A3-W-N-M2-L	631-91075	Connection cables Illumination Brackets Interface accessories Target Marks
Red	V10-RO-A3-R-N-M2-L	631-91078	
Infrared	V10-RO-A3-I-N-M2-L	631-91081	
			<a href="http://www.sensopart.com/en/accessories">www.sensopart.com/en/accessories</a>

Sold & Serviced By:



Toll Free Phone (877) SERV098  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)