


VISOR® V50 Code Reader Professional, medium field of view

Multi Code Reader for 1D and 2D codes and OCR




PRODUCT HIGHLIGHTS

- Can be used for all common 2D codes (ECC 200 data matrix) and common 1D barcodes
- Combination of two functions in one device: code reading and object detection
- Reliable detection of even poorly readable codes under difficult ambient conditions
- Comprehensive tools for flexible and easy connection to PC and PLC environments
- Reading of several similar or differing types of codes in one reading pass
- Reading OCR fonts

Optical data		Functions	
Resolution	2560 x 1936 pixels	Number of jobs / detectors	max. 255 / max. 255
Imaging chip CMOS	1/1.8", monochrome	Detectors	Position tracking: X/Y and orientation;
Integrated lens, focal length [mm]	20 (medium)		Pattern matching, contour: teach-in and detection of patterns and contours;
Pixel size	2.8 µm x 2.8 µm		Grey threshold, brightness: evaluation of brightness;
Focus	Motorized		Contrast: evaluation of contrast;
Adjustment range	100 mm to infinity		Barcode: reading 1D barcodes; EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, code 32, code 39, code 93, code 128, ECC200 GS1, pharm code, codabar;
Integrated illumination	White (5000 K), red (635 nm), infrared (850 nm) LEDs		Datacode: reading 2D codes: ECC200 (GS1), QR code (GS1), Micro QR code, Aztec code (GS1), PDF 417;
Minimum field of view, X x Y	32 x 24 mm		OCR: reading of fonts;
Target laser	Laser: red (635 nm) class 1 ⚠ (IEC 60825-1)		Result processing, Text: checking and calculating with results from detectors
Electrical data		Mechanical data	
Operating voltage, +U _B	18 ... 30 DC ¹	Dimensions	70.4 x 45 x 45 mm (without plug)
Current consumption (without I/O)	≤ 300 mA	Enclosure rating	IP 67 & IP 65
Protective circuits	Reverse-polarity protection, U _B / short-circuit protection of all outputs	Material, housing	Aluminium, die-cast, RoHS compliant
Power On Delay	Approx. 13 s after Power on	Material, front screen	Plastic
Outputs	PNP/NPN (switchable)	Ambient temperature: operation	0 ... +50 °C ²
Max. output current (per output)	50 mA, 100 mA (pin 12)	Ambient temperature: storage	-20 ... +60 °C ²
Switching threshold inputs incl. encoder	PNP/NPN	Weight	Approx. 200 g
Input resistance	High > U _B -1 V / Low < 3 V	Plug connections	Supply and I/O M12, 12-pin Ethernet M12, 4-pin
Interfaces	> 20 kΩ	Vibration resistance	EN 60068-2-6
VISOR® V20-CR-Advanced	Ethernet (LAN), EtherNet/IP, PROFINET, SensoWeb, Service Port	Shock resistance	EN 60068-2-27
Inputs/outputs	Ethernet (LAN), EtherNet/IP, PROFINET, SensoWeb, Service Port		
Encoder	2 inputs, 2 outputs, 6 selectable inputs/outputs		
	✓		

¹ Max. ripple < 5 V_{SS} ² 80 % air humidity, noncondensing


VISOR® vision sensor

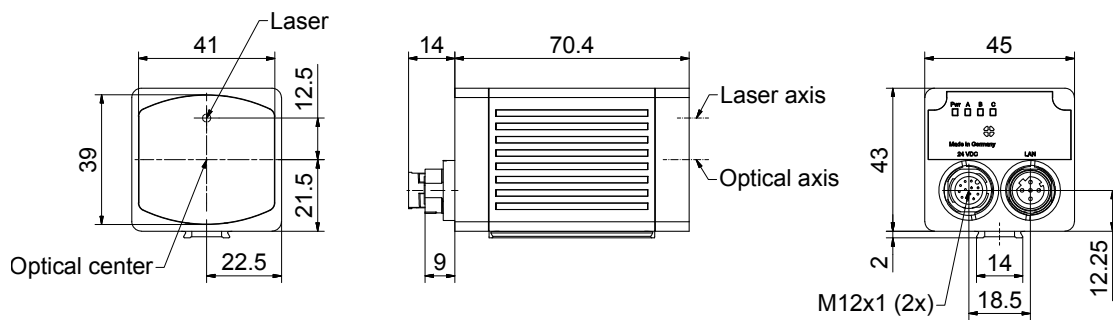

153-13554

4

Field of view V50, medium

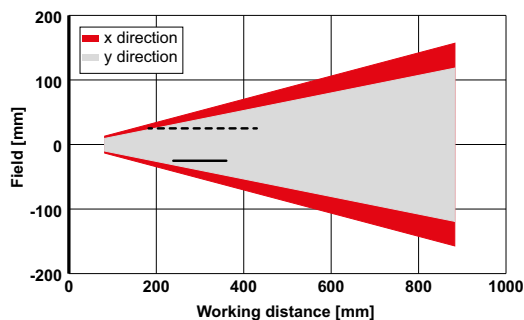

155-03559

Sold & Serviced By:



Toll Free Phone (877) SERV098

www.electromate.com

sales@electromate.com

----- Increased depth of field
 ——— Normal depth of field

Illumination	Part number	Article number	Accessories	
White	V50-CR-P3-W-M-M2-L	635-91021	Connection cables	www.sensopart.com/en/accessories
Red	V50-CR-P3-R-M-M2-L	635-91023	Illumination	
Infrared	V50-CR-P3-I-M-M2-L	635-91025	Brackets	
White	V50-CR-P3-W-MD-M2-L	635-91045	Interface accessories	
Red	V50-CR-P3-R-MD-M2-L	635-91046		
Infrared	V50-CR-P3-I-MD-M2-L	635-91047		