

○ENDURANCE TECHNOLOGY



LINEAR SOLUTIONS MADE EASY

WHAT IS THE RSX?

RSX actuators are an ideal choice for replacing hydraulic cylinders. These high force electric actuators are available for forces up to 50,000 lbf (222.4 kN). Designed for 100% duty cycle, rugged service and long life.




TOLOMATIC'S ELECTRIC ROD-STYLE ACTUATORS

	ERD	RSA	RSX	GSA	IMA
	Rod-Style Actuator	Rod-Style Actuator	Rod-Style Actuator	Guided Rod-Style Actuator	Integrated Servo Actuator
Force up to:	35 kN <i>(7,868 lbf)</i>	58 kN (13,039 lbf)	222.4 kN (50,000 lbf)	4.23 kN (950 lbf)	30.6 kN (6,875 lbf)
Speed up to:	1473 mm/sec (58 in/sec)	3,124 mm/sec (123 in/sec)	760 mm/sec (29.9 in/sec)	3,124 mm/sec (123 in/sec)	1,334 mm/sec (52.5 in/sec)
Stroke Length up to:	1000 mm <i>(39.4 in)</i>	1,524 mm <i>(60 in)</i>	890 mm <i>(35 in)</i>	914 mm <i>(36 in)</i>	457 mm <i>(18 in)</i>
Screw/Nut Type	Solid, Ball & Roller	Solid, Ball & Roller	Roller	Solid & Ball	Ball & Roller
	Fo	r complete information	n see www.tolomatic.c	om or literature numb	er:
Literature Number:	2190-4000	3600-4166	2171-4001	3600-4166	2700-4000

(Not all models deliver maximum values listed, i.e.: Maximum thrust may not be available with maximum speed)





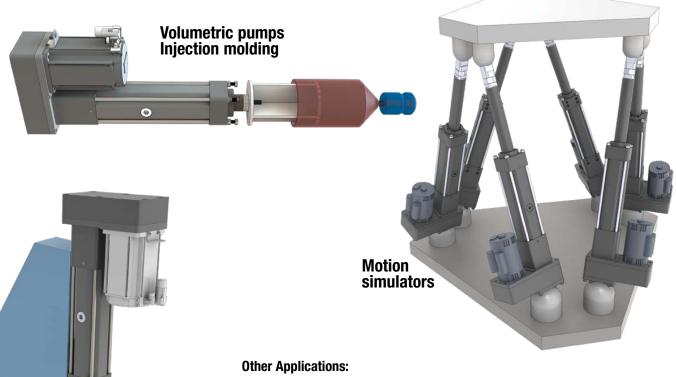

- Active Security Barrier
- Assembly machinery
- Automatic tool changers
- Automotive
- Clamping
- Converting
- Cycle testing
- Fillers
- Formers
- Hydraulic replacement

- Machine tools
- Open/close doors
- · Parts clamping
- Piercing
- Precision grinders
- Product test simulations
- Pressing
- Punching
- Riveting / fastening / joining

- Sawmill equipment
- Stamping
- Tension control
- Test stands
- Tube bending
- Wave generation
- Web guidance
- Welding
- Wire winding
- and many more

Cut-Off & Other Timber Applications

Sold & Serviced By:




Pressing

Punching

Piercing

Toll Free Phone (877) SERV098 www.electromate.com sales@electromate.com



Tolonatic Excellence in MOTION

CONTENTS

What is the RSX? 2
Applications
Standard Features4
Food Grade Features6
Performance8
Dimensions
Switches
Application Data Worksheet 15
Selection Guidelines 16
Ordering

Other Tolomatic Products 18

RSX ELECTRIC ROD-STYLE ACTUATOR

Endurance Technology features are designed for maximum durability to provide extended service life.

The RSX series high force electric actuators with planetary roller screws are designed for rugged service, long life and are an ideal choice for replacing hydraulic cylinders.

- •Steel parts are black or clear zinc plated for corrosion resistance
- Aluminum parts are Type III hardcoat black anodized for high surface hardness

○IP65 STANDARD○

 Protection against dust and water spray (static)

• IP67 OPTION•

•Resist water ingress 1m deep for up to 30 min (static)

O YOUR MOTOR HERE O YOU CAN CHOOSE:

- Specify the motor to be installed and actuator ships with proper mounting hardware
- Specify and ship your device to Tolomátic for factory installation

SCREW ACCURACY

 ± 0.0102 mm/300mm ± 0.0004 "/ft. Roller Nut

FIELD REPLACEABLE

- •Scraper and dual seal design prevent contaminants from entering the housing for
- One piece assembly designed for easy field replacement

- extended life of the actuator

- •Steel thrust tube supports extremely high force capabilities
- Salt bath nitride treatment provides excellent corrosion resistance, surface hardness and is very resistant to adherence of potential contaminants


- Support the thrust tube and nut assembly through entire stroke length
- •Unique nose bearing material allows for smooth operation

- •This re-lubrication system provides extended screw service life
- Convenient lubrication without disassembly
- Grease zerk fitting

 Bumpers protect the screw and nut assembly from damage at both ends of stroke



Tolomatic...MAXIMUM DURABILITY

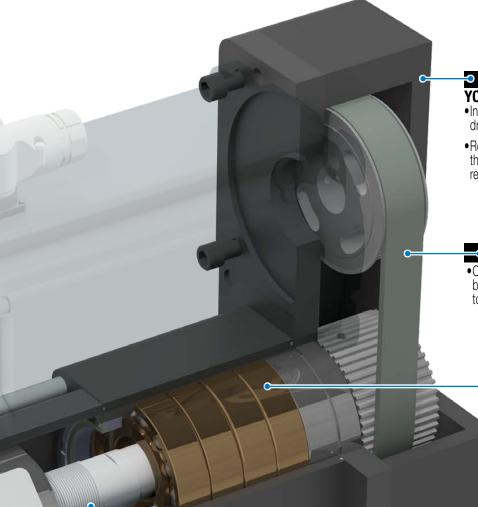

MOTOR ORIENTATION

YOU CAN CHOOSE:

- •Inline option directly couples the driving shaft
- Reverse-parallel option minimizes the overall length and offers a belt reduction drive with a 1:1 or 2:1 ratio

⇒HIGH POWER TIMING BELT∘

• Carbon fiber tensile reinforced synchronous belt to ensure smooth transmission of high torques in a compact design.

HIGH FORCE ANGULAR CONTACT BEARINGS

•Four ball bearings to support high axial loads & forces for long life

⇒BREATHER/PURGE PORTS∘




 Precision ground planetary roller screws provide the highest force and life ratings available

⇒INTERNAL ANTI-RUTATE∘

 Composite bearings prevent rotation of the thrust tube

•Standard feature on



•Use as **Breather Port:** allows air flow

into the interior of the actuator. Prevents additional load on the motor caused by air buildup due to fast cycling of the RSX. Use as **Purge Port:** positive pressure with air lines and filters ensure contaminants do not enter the interior of the actuator.

MOUNTING OPTIONS

- Front Flange Extended Tie Rods
- Trunnion
- Mounting Plates
- Rear Clevis

ROD END OPTIONS •

- Rod Clevis
- Threaded Rod (standard)
- Extended Rod

SENSOR OPTIONS

- •Solid state NPN. PNP or reed
- •Tie Rod Clip


Sold & Serviced By:





RSX096P PRESS MODEL




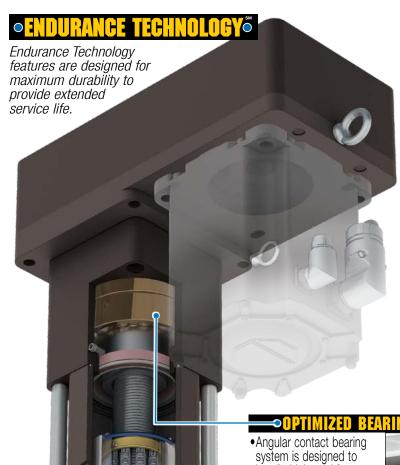

The RSX096P press actuator expands the extend force capability to 40,000 lbf (178 kN) making it well suited for applications such as pressing, riveting, clinching and many others. The RSX096P press model has all the features of the standard RSX on pages 4 & 5 plus oversized tie rods, a bearing system optimized for high force extend, and a high strength steel front flange.

SYSTEM •

handle high axial forces and loads common to press applications



Increased system strength to handle up to 40,000 lbf (177.9 kN) in extend; 15,000 lbf (66.7 kN) in retract

•Durability to meet the demands of high force and stress applications



FOOD GRADE RSX

Endurance Technology features are designed for maximum durability to provide extended service life.

The food grade RSX has all the features of the RSX shown on the previous pages plus additional features that are suited to challenging environments: 316 Stainless steel thrust rod, rod end, tie rods, fasteners; food grade white paint; IP67 rating; and food grade grease. The food grade RSX is a

great option for the food & beverage processing environment. Contact Tolomatic for lead time and application review.



STAINLESS →STEEL MOTOR∘ Mounting Plate

 316 series stainless steel for corrosion resistance

STAINLESS STEEL RE-LUBRICATION C PORT

- Lubrication access cover
- •316 series stainless steel for corrosion resistance
- Grease zerk fitting

⇒FOOD GRADE <u>Paint</u>∘

- •FDA & USDA approved
- White paint reveals any foreign matter to ease clean-up

SMOOTH BODY DESIGN

• Fewer collection points for contaminants in wash-down environments

ostainless steel rods?

•316 Stainless steel tie rods for corrosion resistance and strength

STAINLESS STEEL THRUST ROD & O

 Corrosion resistant 316 series stainless steel thrust rod and rod end

316 SERIES STAINLESS C STEEL FASTENERS

- Stainless steel fasteners for corrosion resistance
- Hex bolts for fewer collection points for contaminants in washdown environments

IP67 STANDARD

- •Static tested against ingress of dust and water for protection of internal components and long actuator life
- **IP67:** Ingress Protection: **First Digit** = Solids, 6 = Dust Tight (No ingress of dust; complete protection against contact) **Second Digit** = Liquids, 7 = Immersion up to 1 m (Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time up to 1 m of submersion)

Contact Tolomatic for lead time and application review of Food Grade RSX



Specifications

PERFORMANCE

	MIN.	*MAX. S	TROKE		SCREW	LEAD	BACK-	MAX.	MAX.	DYNAMIC LOAD	DYNAMIC TORQUE TO OVERCOME
RSX	STROKE		TRR	SCREW	LEAD	ACCURACY	LASH	FORCE	SPEED	RATING	FRICTION
SIZE	mm	mm	mm	CODE	mm/rev	mm/300mm	mm	kN	mm/sec	kN	N-m
080	75	890	820	RN10	10.00	0.01	0.030	80.07	701	173.1	6.21
096	75	800	725	RN12	12.00	0.01	0.030	133.45†	759	269.3	6.21
096P	75	450	_	RN12	12.00	0.01	0.030	177.93**	759	269.3	6.21
128	75	665	555	RN10	10.00	0.01	0.030	222.41	500	442.7	8.47
	in	in	in		turns/in	in/ft	in	lbf	in/sec	lbf	lbf-in
080	2.95	35.03	32.28	RN10	2.54	0.0004	0.0012	18,000	27.6	38,914	55.0
096	2.95	31.49	28.54	RN12	2.12	0.0004	0.0012	30,000+	29.9	60,541	55.0
096P	2.95	17.71		RN12	2.12	0.0004	0.0012	40,000**	29.9	60,541	55.0
128	2.95	26.18	21.85	RN10	2.54	0.0004	0.0012	50,000	19.7	99,519	75.0


^{*}Consult Tolomatic for longer strokes.

TRR = Trunnion option †Requires HT1 Option **Max. force only in extend (retract force 15,000 lbf; 66.7 kN)

		INERTIA					WEIGHT						
			BAS	E ACTUA	TOR		PER UNIT	BASE ACTUATOR					PER UNIT
RSX	SCREW			g-m ² x 10			kg-m ² x 10 ⁻⁴	kg					ka ner mm
SIZE	CODE	LMI	RP1 ST	RP1HT	RP2ST	RP2HT	per mm	LMI	RP1 ST	RP1HT	RP2ST	RP2HT	kg per mm
080	RN10	6.68	12.	.31	5.	03	0.0020	35.17	42.	.16	42.	.12	0.031
096	RN12	20.95	25.72	30.39	10.99	12.00	0.0044	65.64	73.18	75.29	73.65	74.16	0.041
096P	RN12	20.95	30.	.39	12	.00	0.0044	68.86	80.	.22	79.	.10	0.043
128	RN10	82.76	79.	.04	31	.48	0.0132	176.61	207.70 208.46			3.46	0.079
				lb-in ²			lb-in ² per in			lb			lb per in
080	RN10	19.56	36.	.02	14	.72	0.15	77.54	92.	.94	92.	.85	1.72
096	RN12	61.30	75.27	88.94	32.15	35.12	0.33	144.71	161.34	165.98	162.38	163.49	2.31
096P	RN12	61.30	88.	.94	35	.12	0.33	151.82	176	5.85	174	.40	2.40
128	RN10	242.20	231	.29	92	.11	0.98	389.37	457	'.91	459	0.58	4.40

TEMP. RANGE: Standard 4° to 54°C (40° to 130°F) Extended -40° to 60°C (40° to 140°F)

SIZE: ALL: CRITICAL SPEED CAPACITIES*

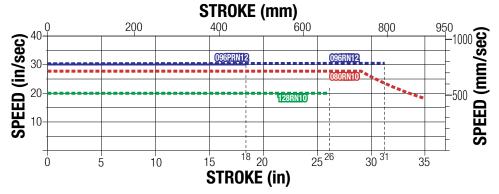



*NOTE: When using Trunnion Mount, (TRR) consider the stroke to be longer when determining Critical Speed and Buckling Load:

2.68 RSX080 68.1 RSX096 72.4 2.85 RSX128 108.0

SIZE: ALL: SCREW BUCKLING LOAD*

			5	IKUKE	(mm)				
50.000)	200		400	600		800	950 222	
50,000					128				
40,000				096P				178	<u>K</u>
					093-		***	133	<u>~</u>
7									9
20,000					080			88.9	0
10,000-								44.5	; —
0									
	5 5	j 1'0	•	5 18 2		5 26	30 31	35	
				STROKE	in)				



ROLLER SCREW LIFE ESTIMATE

PERFORMANCE

RSX Standard Actuators Expected Life:

NOTE: The L₁₀ expected life of a ball or roller screw linear actuator is expressed as the linear travel distance that 90% of properly maintained ball or roller screws manufactured are expected to meet or exceed. This is not a guarantee and this data should be used for estimation purposes only.

The underlying formula that defines this value is: $\mathbf{L}_{10} = \left(\frac{\mathbf{C}}{\mathbf{P}}\right)^3 \bullet \emptyset \equiv$

L₁₀Travel life in millions of units (in or mm), where:

C = Dynamic load rating (lbf) or (N)
 P_e = Equivalent load (lbf) or (N)
 If load is constant across all movements then:

actual load = equivalent load = Screw lead (in/rev) (mm/rev)

Use the "Equivalent Load" calculation below, when the load is not constant throughout the entire stroke. In cases where there is only minor variation in loading, use greatest load for life calculations.

Where: $\mathbf{P}_{e} = \sqrt[3]{\frac{L_{1}(\mathbf{P}_{1})^{3} + L_{2}(\mathbf{P}_{2})^{3} + L_{3}(\mathbf{P}_{3})^{3} + L_{n}(\mathbf{P}_{n})^{3}}{L}}$

 \mathbf{P}_{e} = Equivalent load (lbf) or (N)

 \mathbf{P}_{n} = Each increment at different load (lbf) or (N)

L = Total distanced traveled per cycle (extend + retract stroke) $[L = L_1 + L_2 + L_3 + L_n]$


L_n= Each increment of stroke at different load (in) or (mm)

RSX Press Application Expected Life:

An alternate method for estimating life is used for applications where the force is applied repeatedly over a short area of the stroke. If the distance at max force occurs within one revolution of the screw, contact Tolomatic for assistance determining a life estimate.

Example:

- Travel required is 200mm to load parts and apply the press.
- Contact is made at 190mm extended and continues to 200mm position. Total travel under load is 10mm.
- 10mm is less than the screw lead (distance traveled in one revolution).
- Contact Tolomatic for assistance determining the estimated life.



NOTE: The L10 life estimation method does not include failures caused by other conditions such as contamination, misalignment, improper lubrication and exceeding actuator specifications

RE-LUBRICATION RECOMMENDATION:

Lubrication requirements for electric actuators depend on the motion cycle (velocity, force, duty cycle), type of application, ambient temperature, environmental surrounding and various other factors.

Tolomatic recommends to re-lubricate the actuator at least once per year or every 1,000,000 cycles, whichever comes first, to maximize service life. For more demanding applications such as pressing, high frequency or other

highly stressed applications, the re-lubrication interval for these actuators will vary and will need to be more frequent. In these demanding applications, it is recommended to execute at least 5 full stroke moves every 5,000 cycles of operation (or more frequent if possible) to re-distribute the grease within the actuator.

Re-lubricate with Tolomatic Grease into the grease port located on the side of the actuator.

		RSX080	RSX096(P)	RSX128
Quantity	(g)	8.0 + (0.020 x Stroke ^{mm})	9.5 + (0.025 x Stroke ^{mm})	12.0 + (0.027 x Stroke ^{mm})
Quantity	(OZ)	$0.28 + (0.018 \text{ x Stroke}^{in})$	$0.34 + (0.022 \text{ x Stroke}^{in})$	$0.42 + (0.024 \text{ x Stroke}^{in})$

 $Stroke^{mm} = Stroke \ length \ in \ millimeters \qquad Stroke^{in} = Stroke \ length \ in \ inches$







SIZE: ALL


3D CAD available at www.tolomatic.com
Always use configurated CAD solid model
to determine critical dimensions








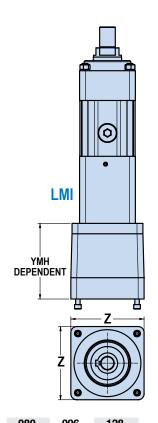

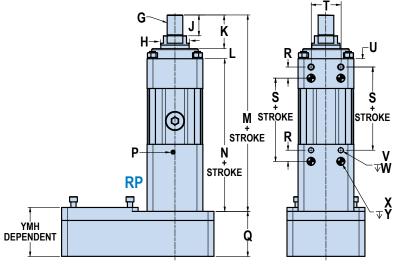



	080	096	128
A	135.0	150.0	220.0
В	67.5	75.0	110.0
C	150.00	171.0	250.0
	110.00	125.00	175.0
D	(+0.00)	(+0.00)	(+0.00)
	(-0.03)	(-0.03)	(-0.03)
E	88.9	104.8	142.9
	RP1		
F	272.9	304.8	422.9
г	RP2		
	271.1	302.3	424.5
	STANDAR	D	
G	M36 x	M42 x	M64 x
	3.0-6g	4.5-6g	3.0-6g
Hø	63.388 /	76.093 /	101.488 /
שוו	63.449	76.149	101.549
THI	READ LEN	GTH	
J	60.0	69.9	105.0
FUI	L RETRAC	CT	
K	95.0	104.8	167.0
L	27.0	27.0	33.0
M	474.7	601.1	805.7
N	352.7	469.2	605.8

OOC.

	080	096	128
Р	RC 1/8 -28 X 38.1 DP (Plugged)	RC 1/8 -28 X 38.1 DP (Plugged)	RC 1/4 -19 X 38.1 DP (Plugged)
Q	96.0	124.7	182.9
R	30.0	30.0	40.0
S	210.9	282.4	369.0
T	70.0	80.0	115.0
U	18.0	22.3	35.0
V	M12 x 1.75-6H	M16 x 2.0-6H	M20 x 2.5-6H
W	▼18.0 (4)	 ↓ 20.0 (4)	▼ 20.0 (4)
X	16.025 16.012	20.025 20.013	20.033 20.013
Y	↓ 15.0 (4)	↓ 15.0 (4)	
Z	152.4	196.9	279.4
AA	177.8	209.6	285.8
BB	355.6	409.6	584.2
	Dimensio	ns in millim	eters

Dimensions	in	millimeters
------------	----	-------------

	080	096	128
Α	5.31	5.91	8.66
В	2.66	2.95	4.33
C	5.905	6.73	9.84
	4.331	4.921	6.89
D	(+0.000)		(+0.000)
	(-0.001)	(-0.001)	(-0.001)
Е	3.50	4.13	5.63
	RP1		
F	10.74	12.00	16.65
	RP2		
	10.67	11.90	16.71
G	SR1 OPTION	NC	
	11/2-12	17/8-12	21/2-8
	UN-2A	UN-2A	UN-2A
Нø	2.4956/		3.9956/
שוו	2.4980	2.9980	3.9980
THE	READ LENG		
J	2.36	2.75	4.13
FUL	L RETRAC	T	
K	3.74	4.13	6.57
L	1.06	1.06	1.30
M	18.69	23.66	31.72
N	13.89	18.47	23.85


	080	096	128
	RC 1/8	RC 1/8	RC 1/4
Р	-28 X	-28 X	-19 X
г	38.1 DP	38.1 DP	38.1 DP
	(Plugged)	(Plugged)	(Plugged)
Q	3.78	4.91	7.20
R	1.18	1.18	1.57
S	8.30	11.12	14.53
T	2.76	3.15	4.53
U	0.71	0.88	1.38
v	M12 x	M16 x	M20 x
V	1.75-6H	2.0-6H	2.5-6H
W	▼ .71 (4)	▼ .79 (4)	▼ .79 (4)
Х	Ø.6309	Ø.7884	Ø.7887
^	Ø.6304	Ø.7879	Ø.7879
Y	▼ .59 (4)	▼ .59 (4)	▼ 1.18 (4)
Z	6.00	7.75	11.00
AA	7.00	8.25	1125
BB	14.00	16.13	23.00

Dimensions in inches



SIZE: ALL DIMENSIONS

CLEVIS OPTION (CLV)




	080	096	128
Α	40.00 39.59	50.00 49.59	60.00 59.26
В	29.0	34.0	51.0
C	75.0	88.3	137.0
D	25.0	31.0	45.0
Е	35.0	35.0	62.0
F	28.05 28.00	36.06 36.00	45.06 45.00

Dimens	ions	in mi	llime	ters

	080	096	128
A	1.575 1.559	1.969 1.953	2.362 2.333
В	1.14	1.34	2.01
C	2.95	3.48	5.39
D	0.98	1.22	1.77
Е	1.38	1.38	2.44
F	1.104 1.102	1.420 1.417	1.774 1.772

Dimensions in inches


FRONT FLANGE OPTION (FFG)



	080	096	128
Α	42.0	52.0	85.0
В	225.0	250.0	360.0
C	180.0	208.0	300.0
D	10.013 10.000	12.025 12.013	20.033 20.013
Е	12.0	12.0	20.0
F	100.0	126.0	65.0
G	-	-	190.0
Н	150.0	165.0	245.0
J	18.0	22.0	26.2

	080	096	128			
Α	1.65	2.05	3.35			
В	8.86	9.84	14.17			
C	7.09	8.19	11.81			
D	0.3942 0.3937	0.4734 0.4729	0.7887 0.7879			
Е	0.47	0.47	0.79			
F	3.94	4.96	2.56			
G	_	_	7.48			
Н	5.91	6.50	9.65			
J	0.71	0.87	1.03			
Dimensions in inches						

REAR CLEVIS OPTION (PCD)




	080	096	128			
Α	40.5	54.0	93.8			
В	40.69 40.31	50.70 50.32	60.80 60.34			
C	82.3	100.3	122.3			
D	27.978 27.940	35.980 35.940	44.99 44.94			
Ε	63.4	78.4	128.1			
Dimensions in millimeters						

	080	096	128			
Α	1.60	2.13	3.69			
В	1.602 1.587	1.996 1.981	2.394 2.376			
C	3.24	3.95	4.82			
D	1.1015 1.1000	1.4165 1.4150	1.771 1.769			
Е	2.50	3.09	5.04			
Dimensions in inches						

1.4165 1.771 A = Customer Specified Length

EXTENDED TIE ROD OPTION (XT)



IMPERIAL THREAD OPTION (SRI)






3D CAD available at www.tolomatic.com


Always use configurated CAD solid model
to determine critical dimensions




MOUNTING PLATE OPTION (MP2) DIMENSIONS

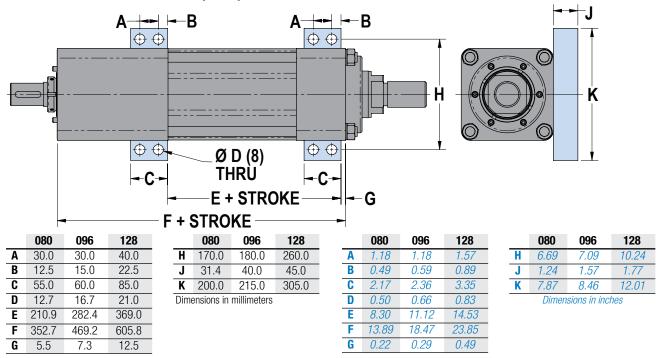

TRUNNION OPTION (TRR) DIMENSIONS

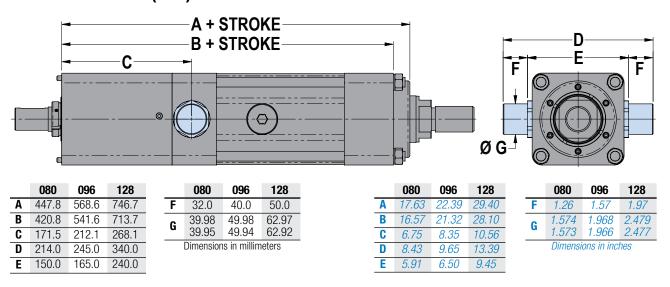

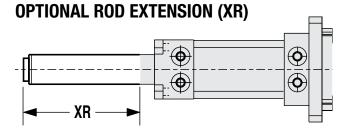

The thrust rod length can be extended by specifying the rod extension option. This does not increase the working stroke, only the length of the thrust rod.

NOTE: Please consult Tolomatic if your application requires rod extension length greater than 100 mm (3.9 in).



SWITCHES



RSX actuators offer a wide range of sensing choices. There are 12 switch choices: reed, solid state PNP (sourcing) or solid state NPN (sinking); in normally open or normally closed; with flying leads or quick-disconnect.

Commonly used for end-of-stroke positioning, these switches allow installation anywhere along the entire actuator length. The internal magnet is a standard feature. Switches can be installed in the field at any time.

Switches are used to send digital signals to PLC (programmable logic controller), TTL, CMOS circuit or other controller device. Switches contain reverse polarity protection. Solid state QD cables are shielded; shield should be terminated at flying lead end.

All switches are CE rated and are RoHS compliant. Switches feature bright red or yellow LED signal indicators; solid state switches also have green LED power indicators.





	Order Code	Lead	Switching Logic	Power LED	Signal LED	Operating Voltage	**Power Rating (Watts)	Switching Current (mA max.)	Current Consumption	Voltage Drop	Leakage Current	Temp. Range	Shock / Vibration
REED	RY RK	5m QD*	SPST Normally Open	Tolomatic	Red	5 - 240 AC/DC	**10.0	100mA	_	3.0 V max.	_	14 to 158°F [-10 to 70°C]	
HELD	NY NK	5m QD*	SPST Normally Closed	Tolomatio	Yellow c ○ 81009084	5 - 110 AC/DC							50 G / 9 G
SOLID STATE	TY	5m QD*	PNP (Sourcing) Normally Open	Green	Yellow		**3.0	100mA	20 mA @ 24V	2.0 V max.	0.05 mA max.		
	KY KK	5m QD*	NPN (Sinking) Normally Open	Green Tolomatic	Red	10 - 30							
	PY PK	5m QD*	PNP (Sourcing) Normally Closed	Green	Yellow	VDC							
	HY	5m QD*	NPN (Sinking) Normally Closed	Green Tolomatic	Red								

*QD = Quick-disconnect

Enclosure classification IEC 529 IP67 (NEMA 6)

CABLES: Robotic grade, oil resistant polyurethane jacket, PVC insulation

**WARNING: Do not exceed power rating (Watt = Voltage x Amperage). Permanent damage to sensor will occur.

SWITCH INSTALLATION




Place switch bracket onto any one of the four tie rods that run the length of the extruded tube. Insert the switch with set screw and the word "Tolomatic" facing up and slide into the mating slot on the bracket. Position the bracket with the switch to the exact location desired, with the bracket tight to the surface of the extrusion, then lock the bracket securely into place by tightening the set screw with the Allen wrench provided. Then tighten the switch into the bracket with a small slotted screwdriver.








SWITCHES


WIRING DIAGRAMS























SWITCH DIMENSIONS




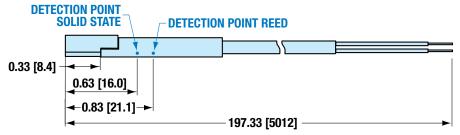

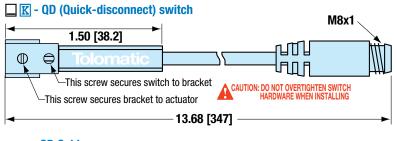

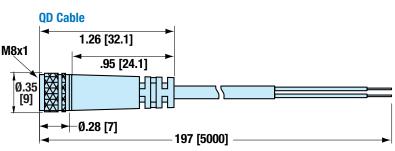

SWITCH MOUNTING



The switch bracket and switch does not extend beyond the profile of the RSX heads.



APPLICATION DATA W	ORKSHEET	Fill in known data. Not a required for all applicatio		
RSX Horizontal	□ Vertical	□ Incline ° α		
☐ Load supported by actuator OR			DDEOLOION	
MOVE PROFILE		TH millimeters	PRECISION Repeatability	
Mayo Distance	(US Standard)	(Metric)		millimeters
Move Distance millimeters (US Standard) [Metric]	_		OPERATING ENVI	RONMENT
Move Timese	ec		Temperature, Contar	nination, vvater, etc.
Max. Speed mm/sec	_			
Dwell Time After Movese	2 C			
RETRACT Move Distance □ inch □ millimeters	_		AC	FREE: On-line sizing and selection at sizeit. tolomatic
Move Timese	ec		The state of the s	IZING .com
Max. Speed	_			Or Call 1-800-328-2174 for Excellent Customer Service & Technical Support
☐ in/sec ☐ mm/sec		LE		-
Dwell Time After Movese	ec + Speed()			Graph your most demanding cycle,
NO OF CVCLES				including accel/decel, velocity and dwell
NO. OF CYCLES per minute per hour	_			times. You may also want to indicate load
por minute por mour				variations and I/O changes during the
HOLD POSITION? Required				cycle. Label axes with proper scale and
☐ Not Require				units.
☐ After Move ☐ During Power Los	SS		Time or Distance (
NOTE: If load or force changes during cycle	e		Time of Distance (1-
use the highest numbers for calculations				
EXTEND RETRACT				
LOAD LOAD				
□ lb. □ kg. □ lb. □ kç				
(U.S. Standard) (Metric) (U.S. Standard) (Metric))			
FORCE FORCE				
☐ lbf. ☐ N ☐ lbf. ☐ N				_
(U.S. Standard) (Metric) (U.S. Standard) (Metric)	Name, Phone, Em	nail		
	Co. Name, Etc.			



USE THE TOLOMATIC SIZING AND SELECTION SOFTWARE AVAILABLE ON-LINE AT www.tolomatic.com OR... CALL TOLOMATIC AT 1-800-328-2174. We will provide any assistance needed to determine the proper actuator for the job.

FAX 1-763-478-8080



Selection Guidelines

Using the application stroke length, desired cycle time, loads and forces, establish the motion profile details including linear velocity and force in each of its segments.

SELECT ACTUATOR SIZE AND SCREW TYPE

Based on the required velocities and forces, select an actuator size including the lead of the roller screw assembly..

Serify CRITICAL SPEED OF THE SCREW

Verify that the application's peak linear velocity does not exceed the critical speed value for the size and lead of the screw selected.

VERIFY AXIAL BUCKLING STRENGTH OF THE SCREW

Verify that the peak force does not exceed the critical buckling force for the size of the screw selected.

5 COMPARE APPLICATION'S PEAK PARAMETERS TO PEAK CAPACITY (PEAK REGION) OF SELECTED ACTUATOR

Calculate the application's required peak force and peak velocity and compare to the graphs. The selection must satisfy the application's peak requirements.

CONSIDER LUBRICATION INTERVALEvaluate the recommended lubrication interval with respect to the application motion profile.

See page RSX 7 for complete lubrication information.

The above guidelines are for reference only.

Use Tolomatic online sizing software for best results.

TEMPERATURE CONSIDERATIONS

If the application's ambient temperature lies outside of the standard range (see page RSX_8), contact Tolomatic.

SELECT A MOTOR-ACTUATOR CONFIGURATION

Select an inline or a reverse-parallel motor configuration.

ESTABLISH TOTAL TORQUE REQUIREMENTS

Calculate total system inertia, the peak and the RMS torque required from the motor to overcome internal friction, external forces and accelerate/decelerate the load.

SELECT A MOTOR

Use the obtained total torque value to select a motor and a reduction device (if required). Verify that the peak torque value is below the motor's peak torque curve, and that the continuous torque value is below the motor's continuous torque curve. Verify the minimum torque margin (15%). Verify the inertia match.

SELECT OPTIONAL POSITION SENSORS

12 sensor choices include: reed, solid state PNP or NPN, all in normally open or normally closed, with flying leads or quick-disconnect couplers.

1 SELECT ACTUATOR MOUNTING


Mounting options include: TRN trunnion mount,
FFG front flange mount, MP2 mounting plates,
PCD clevis mount.

SELECT ROD END OPTIONS
Rod end options include: CLV clevis rod end.





Ordering

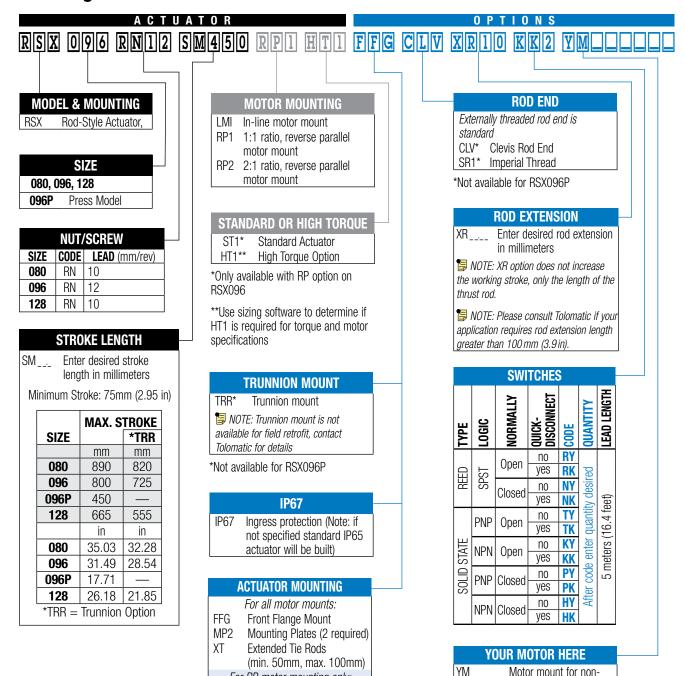

Contact Tolomatic for food grade option lead time and application



Not all codes listed are compatible with all options. Contact Tolomatic with any questions.

For RP motor mounting only:

PCD* Clevis Mount

*Not available for RSX096P

Sold & Serviced By:

Tolomatic motor.

www.tolomatic.com





The Tolomatic Difference Expect More From the Industry Leader:



Unique linear actuator solutions with Endurance TechnologySM to solve your challenging application requirements.



The fastest delivery of catalog products... Built-to-order with configurable stroke lengths and flexible mounting options.



Online sizing that is easy to use, accurate and always up-to-date. Find a Tolomatic electric actuator to meet your requirements.



Match your motor with compatible mounting plates that ship with any Tolomatic electric actuator.



Easy to access CAD files available in the most popular formats to place directly into your assembly.



Extensive motion control knowledge: Expect prompt, courteous replies to any application and product questions from Tolomatic's industry experts.

Also Consider These Other Tolomatic Products:

Electric Products

Rod & Guided Rod Style Actuators, High Force Actuators, Screw & Belt Drive Rodless Actuators, Motors, Drives and Controllers

"Foldout" Brochure #9900-9074





Pneumatic Products

Rodless Cylinders: Band Cylinders, Cable Cylinders, Magnetically Coupled Cylinders/Slides; Guided Rod Cylinder Slides

"Foldout" Brochure #9900-9075



Power Transmission Products

Gearboxes: Float-A-Shaft®, Slide-Rite®; Caliper Disc Brakes; Planetary Roller Screws

"Foldout" Brochure #9900-9076

Sold & Serviced By:

