

# UR12e

## Technical specification

Our most versatile robot, the UR12e delivers an impressive payload of 12.5 kg and 1300 mm reach, making it ideal for a wide range of applications.

Today, more than 100,000 UR collaborative industrial robots have been delivered to customers across industries and around the world. The e-Series of cobots brings incredible flexibility and unparalleled ease of use to your application.

Updated April 2025.

Copyright © 2025 by Universal Robots A/S. All rights reserved.

## UR12e

### Specification

Payload	12.5 kg (27.5 lbs)
Reach	1300 mm (51.2 in)
Degrees of freedom	6 rotating joints
Programming	12-inch touchscreen with PolyScope graphical user interface
<b>Power consumption (average)</b>	
Maximum power	615 W
Moderate operating settings	350 W
Operating temperature range	Ambient temperature: 0-50°C (32-122°F)
<b>Safety functions</b>	17 configurable safety functions
In compliance with	EN ISO 13849-1 (PLd Category 3) and EN ISO 10218-1

### Performance

Force sensing, tool flange/torque sensor	Force, x-y-z	Torque, x-y-z
Range	± 100.0 N	± 10.0 Nm
Precision	± 5.0 N	± 0.2 Nm
Accuracy	± 5.5 N	± 0.5 Nm

### Movement

Max TCP speed	4 m/s
Pose Repeatability per ISO 9283	± 0.05 mm
<b>Axis movement</b>	<b>Working range</b> <b>Maximum speed</b>
Base	± 360°            ± 120°/s
Shoulder	± 360°            ± 120°/s
Elbow	± 360°            ± 180°/s
Wrist 1	± 360°            ± 180°/s
Wrist 2	± 360°            ± 180°/s
Wrist 3	± 360°            ± 180°/s

### Features

IP classification	IP54 water protection
Noise	< 65 dB(A)
Robot mounting	Any orientation
<b>I/O Ports</b>	
Digital In	2
Digital Out	2
Analog In	2
Tool I/O power supply voltage	12/24 V
Tool I/O power supply	2 A (Dual pin) 1 A (Single pin)

### Physical

Footprint	Ø190 mm
Materials	Aluminum, plastic, steel
Tool flange interface	M8 8-pin female, EN ISO-9409-1-50-4-M6
Connector type	M8 8-pin female
Cable length (robot arm)	6 m (236 in)
Weight including cable	33.5 kg (73.9 lbs)
Humidity	≤ 90% RH (non-condensing)

## Teach Pendant

### Features

IP classification	IP54 water protection
Humidity	≤ 90% RH (non-condensing)
Display resolution	1280 x 800 pixels

### Physical

Materials	Plastic
Teach Pendant size (W x H x D)	300 mm x 231 mm x 50 mm (11.8 in x 9.1 in x 1.97 in)
Weight	1.6 kg (3.5 lbs) including 1 m of Teach Pendant cable
Cable length	4.5 m (177.17 in)

## Control Box

### Features

IP Classification	IP44 water protection
Operating temperature range	Ambient temperature: 0-50°C (32-122°F)
Humidity	≤ 90% RH (non-condensing)

### I/O Ports

Digital In	16
Digital Out	16
Analog In	2
Analog Out	2
Quadrature Digital Inputs	4
I/O Power Supply	24V, 2A
Industrial Protocols	Modbus-TCP (Client/Sever) Ethernet/IP Adapter PROFINET device/PROFIsafe ROS/ROS2

### Hardware Interfaces

Hardware Interfaces	Ethernet 1 Gb/s USB 2.0, USB 3.0 Mini DisplayPort Injection Moulding Machine Interface (SPI AN-146 & Euromap-67)
---------------------	---


Power Source	100-240 VAC, 47-440 Hz
--------------	------------------------

### Physical


Control Box Size (W x H x D)	460 mm x 449 mm x 254 mm (18.2 in x 17.6 in x 10 in)
Weight	12 kg (26.5 lbs)
Materials	Powder coated steel

The control box is also available in an OEM version


UR12e payload curve

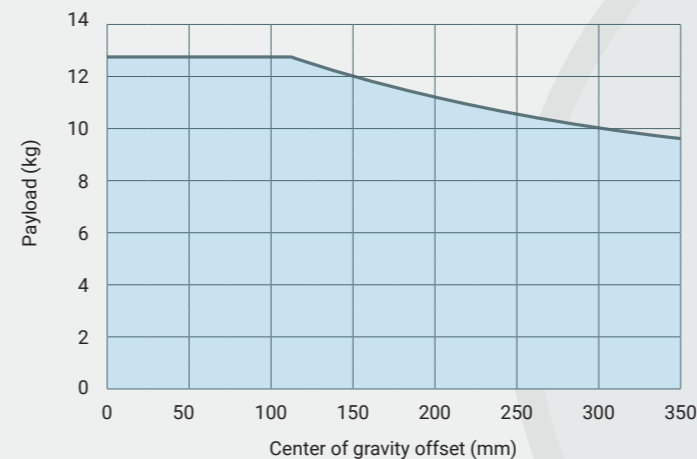

Interface for UR12e base flange

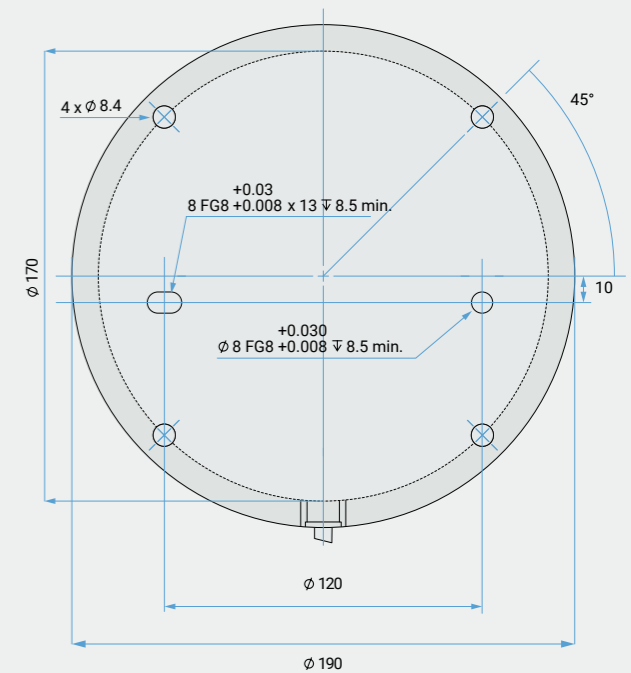

Tool flange for UR12e

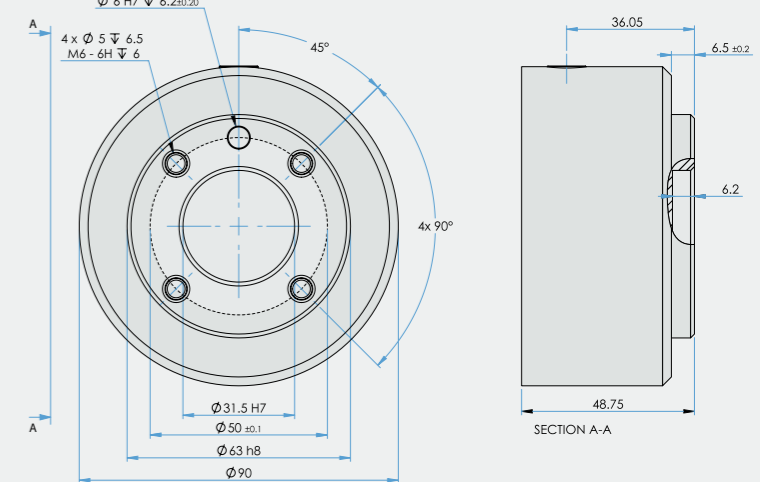

Sold & Serviced By:



Toll Free Phone (877) SERV098  
Toll Free Fax (877) SERV099  
[www.electromate.com](http://www.electromate.com)  
[sales@electromate.com](mailto:sales@electromate.com)

